

INNOVATIVE, CONNECTED, RESPONSIVE.

Kitchen and Laundry range



INTRODUCTION

We are pioneers with a vision. Flavour conducted your way.	02 04
REFRIGERATION	06
Integrated Fridge Freezers	13
Integrated Fridges and Freezers	20
Freestanding Fridge Freezers	30
Freestanding Fridges and Freezers	34
Wine Cooling	38
OVENS	42
Single Ovens	50
Built-In Double Ovens	59
Built Under Double Ovens	62
Compacts	64
Microwave Ovens	75
Blackline Range	78
HOBS	84
Induction Hobs	92
Combo Hobs	105
Ceramic Hobs	106
Gas Hobs	110
Mixed Fuel Hobs	124
CrystalLine	125
FREESTANDING	128
HOODS	140

DISHWASHERS	156
Fully Integrated Dishwashers	163
Semi-Integrated Dishwashers	167
Slimline Built-In Dishwashers	168
Freestanding Dishwashers	169
Freestanding Slim Line Dishwashers	173
LAUNDRY	174
Washing Machines	186
Tumble Dryers	196
Washer Dryers	204
SPECIFICATION TABLES	208
INSTALLATION DIAGRAMS	284
WARRANTIES	306

WE ARE PIONEERS WITH A VISION.

We thrive upon innovation designed to give you the ultimate feeling of mastery in your home and laundry care. We see your needs of today. And foresee the ones of tomorrow. So that you can achieve results that don't just meet your standards, but exceed them.

We believe in intelligent technology and exceptional performance, helping you to take anything you do at home to the next level, every day.

We are proud of our distinctive engineering and responsive design, guaranteeing you the performance you expect and deserve.

We are a brand that people turn to for intelligent and exciting new ways to guarantee their outcome.

This has been our passion for over 125 years, and continues to be our passion today.

We are AEG. And together with you, we are always an idea ahead.

Lifts gentle to a new level

The world's first ComfortLift® dishwasher means less bending down, to make your life more comfortable.



FLAVOUR CONDUCTED YOUR WAY.

The Mastery Range from AEG works with you in unique ways to take your cooking to the next level. Every appliance ready to play their part, working in harmony and instantly responding to your second-bysecond commands.

Now, for the first time, you can even tell the oven how you want your dish cooked – using just the words you would in a restaurant – rare, medium, well done. Or a hob that allows you to Sous Vide, using its intelligent wireless food probe. It's time to expect more from the way you cook. Step into the world's most responsive cooking experience.

Maestro, your kitchen is waiting.




Flavour is all about freshness and storing ingredients – the right humidity and temperature is vital. But how do you want your fridge arranged?

Our solution lets you decide. Everything and anything fits in perfectly for long-lasting flavour, while maintaining energy efficiency, protecting your environment and your budget.

Our Zero Degree compartments make it possible to create different chilling conditions in each part of your refrigerator. Adjust each drawer's temperature at a touch.

IN THIS SECTION

Integrated Fridge Freezers	13–
Integrated Fridges and Freezers	20-3
Freestanding Fridge Freezers	30-
Freestanding Fridges and Freezers	34-
Wine Cooling	38-

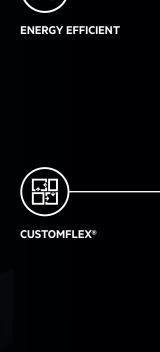

1	$\widehat{\boldsymbol{c}}$	
(-	$\overline{\mathbf{\hat{c}}}$	-)-
	Ĵ	

aeg.co.uk/kitchen/cooling/fridge-freezers



PRECISION CHILLING

(2)


TwinTech®

Unlike conventional fridge freezers that use cold, ultra-dry air from the freezer and recirculate it to cool the fridge, TwinTech[®] units have two separate cooling systems. This provides the ideal humidity in each compartment, preventing food from drying out in the fridge and delivering frost-free storage in the freezer.



Energy Efficient

Did you know that our appliances are leaders in energy performance, with the highest ratings of up to A+++ -20% energy saving?

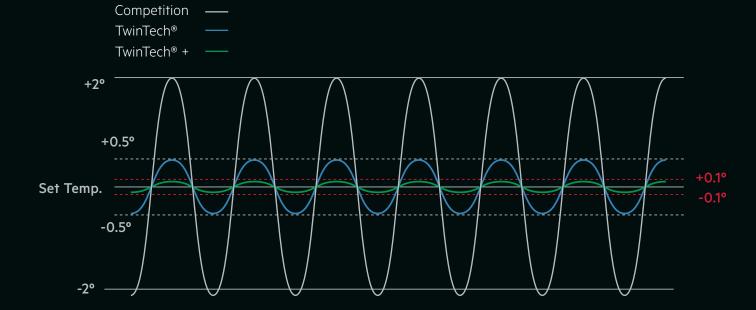





Without Zero Degree





DynamicAir

DynamicAir technology maintains the airflow inside the fridge, ensuring consistent temperature at every shelf so that your ingredients stay fresh.



LowFrost/NoFrost

Never defrost your freezer again. NoFrost freezers also offer efficient and effective freezing with quicker, more even freezing for better food preservation.



Zero Degree

Our Zero Degree compartments make it possible to create different chilling conditions in each part of your refrigerator. Adjust each drawer's temperature at a touch.

ADAPTABLE FOR EVERY TASTE

CustomFlex®

Create your own perfectly organised fridge with the CustomFlex® storage system. This unique and practical inner door allows you to arrange shelves, clips and compartments in all shapes and sizes in hundreds of different layouts, so there's always one that works best for you at any time.











LED Touch Display

Touch controls with new white LED digital display.



High Efficiency LED Lighting

High efficiency LED lighting ensures a good spread of light shines downwards in the fridge. An intelligent fan function prevents warm areas in the upper part of the fridge and creates an even temperature in all fridge levels.



Self-Closing Door

An elegant solution, with no risk of slamming. Automatically closes from an opening angle of 25–30 degrees.

A GUIDE TO REFRIGERATION ICONS

KEY FEATURES



With the pioneering TwinTech® technology for exceptional freshness. One cooling system chills the freezer, keeping it NoFrost. The other cools the fridge, ensuring that the fridge temperature is cold, stable and with the correct level of humidity, so as not to dry out your fruit and vegetables.



Ideal for freezing fresh food quickly, preserving the flavour, colour, texture and nutritional value.



The Multi Air Flow technology provides the precise temperature and humidity your ingredients need to stay fresh in your fridge, nutritious and full of flavour for even longer.



CustomFlex®

Keeping all your fresh ingredients to hand is key to creating fresh, delicious dishes. Now the CustomFlex® refrigerator from AEG lets you organise your fridge storage just the way you want.



Sleek touch controls that are intuitive and ready to use.



Dispenser through the door for water and ice cubes.







Never defrost your freezer again. NoFrost freezers offer efficient and effective freezing with quicker, more even freezing for better food preservation.



Faster, more efficient defrosting. Time is of the essence when defrosting your freezer. This fridge freezer comes with efficient LowFrost technology, which makes the defrosting faster and less frequent than ever before.



The LongFresh feature is a Zero Degree compartment with adjustable temperature settings and separate humidity. The two Zero Degree compartments in the AEG refrigerator allow you to choose and adjust the humidity and temperature settings in each drawer.



Intuitive touch controls provide instant feedback, are easy to use and look sleek in the kitchen

Soft Close Doors

Soft Close door hinges that automatically close from an angle of 23–30 degrees – providing an elegant solution to slamming doors.



Premium and modern lighting system in the fridge thanks to the bright LED light with rise-on effect.



Ideal for chilling fresh food quickly and regaining a stable temperature within the fridge once the door has been opened, maintaining food freshness.



DynamicAir technology maintains the airflow inside the fridge, ensuring a consistent temperature at every shelf so that your ingredients stay fresh.

UltraFresh+

Automatic humidity control and antioxident release filter inside the fridge compartment, keeping fruit and vegetables market fresh.



MultiSpace

No compromise between kitchen dimensions and your storage requirements. More storage capacity than a standard built-in model for an improved organization and flexibility.



SpinView the revolutionary solution fo easy access to those hard to reach items. SpinView rotates with one touch in both directions, allowing full accessibility to the back of the shelf with minimum effort.



Our simple to use electronic controls, with Frostmatic function, ensure that you can set the fridge freezer to your desired temperature.



Fully convertible middle draw ranging from -18 to +7 degrees. Provides optimal environment for any type of food.

REFRIGERATION

CUSTOMFLEX® FRIDGE FREEZERS



CustomFlex® Integrated NoFrost Fridge Freezer SCE8186VTC **KEY FEATURES**

$\left(\frac{2}{2}\right)$			(\mathbf{k})	
TwinTech®	NoFrost	CustomFlex®	Soft Close Doors	DynamicAir
(Junj)		COULMATE	FROSTMATE	TEMPERATURE
Touch Control	LED Lighting	Coolmatic	Frostmatic	High Temperatur Alarm

FREEZER FEATURES	
Auto defrost	
3 full width drawers	
DOOR FEATURES	
Door open alarm	
Reversible doors (right as default)	

Capacity			
Fridge:			
189 ltr (gross)			
186 ltr (net)			
Freezer:			
76 ltr (gross)			

61 ltr (net)

Combined:

265 ltr (gross)

247 ltr (net)

Additional Information Annual energy consumption: 120kw Noise: 39dB Power cut safe rising time: 23h Holiday mode: Yes Door fixing: BI DoD

Colour White

Energy Rating: A+++


Appliance Dimensions (HxWxD) in mm: Combined: 1769 x 556 x 549 Built-in: 1780 x 560 x 550





CustomFlex® Integrated NoFrost Fridge Freezer SCE8182VNC **KEY FEATURES**





FRIDGE FEATURES

Auto defrost

3 full width + flexi shelf

2 half width salad drawers

Dairy compartment with lid

Egg tray: 2 for 6 eggs

FREEZER FEATURES

Auto defrost

3 full width drawers

DOOR FEATURES

Door open alarm

Reversible doors (right as default)

Capacity

Fridge: 189 ltr (gross) 186 ltr (net)

Freezer. 76 ltr (gross) 61 ltr (net)

Combined: 265 ltr (gross) 247 ltr (net)

Energy Rating: A++

Additional Information Annual energy consumption: 226kw Noise: 39dB Power cut safe rising time: 23h Holiday mode: Yes Door fixing: BI DoD

Colour White

Appliance Dimensions (HxWxD) in mm: Combined: 1769 x 556 x 549 Built-in: 1780 x 560 x 550

CUSTOMFLEX® FRIDGE FREEZERS





CustomFlex[®] Integrated NoFrost Fridge Freezer SCE8182VTS **KEY FEATURES**

C C TwinTech®	NoFrost	Custor	nFlex®	DynamicAir	Touch Control
LED LED Lighting	Coolmatic	Frost	matic	High Temperature Alarm	
FRIDGE FEAT	URES		FREE	ZER FEATU	RES
Auto defrost			Auto	defrost	
Auto defrost 3 full width + f	flexi shelf			defrost width drawer	S
			3 full		-
3 full width + 1	alad drawers		3 full	width drawer	-
3 full width + 1 2 half width sa	alad drawers tment with lid		3 full DOOI Door	width drawer	-



CustomFlex[®] Integrated Fridge Freezer SCB6182VNS **KEY FEATURES**

Touch Control	TwinTech®	CustomFlex* Touch Control		
URES	FRIDGE FEATURES	FREEZER FEATURES		
	Auto defrost	Auto defrost		
ers	3 full width + flexi shelf	3 full width drawers		
S	2 half width salad drawers	DOOR FEATURES		
	Dairy compartment with lid	Door open alarm		
(right as default)	Egg tray: 2 for 6 eggs	Reversible doors (right as default)		

Capacity	Additional Information		
Fridge:	Annual energy consumption: 228kw Noise: 39dB Power cut safe rising time: 21h		
 197 Itr (gross) 192 Itr (net) Freezer: 76 Itr (gross) 61 Itr (net) 			
	Door fixing: BI slide door		
	Combined: 273 ltr (gross) 253 ltr (net)	Colour White	
Energy Rating: A++	Appliance Dimensions		
	(HxWxD) in mm: Combined: 1772 x 540 x 549		

Built-in: 1780 x 560 x 550

Capacity
Fridge:
197 ltr (gross)
192 ltr (net)
Freezer:
76 ltr (gross)
61 ltr (net)
Combined:
273 ltr (gross)
253 ltr (net)
Energy Rating: A++

Additional Information Annual energy consumption: 228kw Noise: 39dB Power cut safe rising time: 21h Holiday mode: Yes Door fixing: BI slide door


Colour White Appliance Dimensions (HxWxD) in mm:

Combined: 1772 x 540 x 549 Built-in: 1780 x 560 x 550

EXTRA TALL FRIDGE FREEZERS



Extra Tall MultiSpace Integrated Fridge Freezer SCE81925TS **KEY FEATURES**



FRIDGE FEATORES	
Auto defrost	Auto defrost
3 full width + flexi shelf	3 full width drawers
Fresh box	DOOR FEATURES
Dairy compartment with lid	Reversible doors (right as default)
Egg tray: 1 for 10 eggs	

Capacity	Additional Information	Capacity	Additional Information
Fridge:	Annual energy consumption: 233kw	Fridge:	Annual energy consumption: 233kw
211 ltr (gross)	Noise: 39dB	211 ltr (gross)	Noise: 39dB
207 ltr (net)	Power cut safe rising time: 21h	207 ltr (net)	Power cut safe rising time: 21h
Freezer:	Holiday mode: Yes	Freezer:	Holiday mode: Yes
76 ltr (gross) 60 ltr (net)	Door fixing: BI slide door	76 ltr (gross) 60 ltr (net)	Door fixing: BI slide door
Combined: 287 ltr (gross)	Colour	Combined: 287 ltr (gross)	Colour
267 ltr (net)	White	267 ltr (net)	White
Energy Rating: A++	Appliance Dimensions (HxWxD) in mm: Combined: 1884 x 540 x 549 Built-in: 1898 x 556 x 549	Energy Rating: A++	Appliance Dimensions (HxWxD) in mm: Combined: 1884 x 540 x 549 Built-in: 1898 x 556 x 549





Extra Tall MultiSpace Integrated Fridge Freezer with SpinView SCE81928TS **KEY FEATURES**

(360°) SpinView	MultiSpace	(2) TwinTech*	NoFrost	CustomFlex*
LCD Touch Displayl	Coolmatic	ROSTMATE Frostmatic	LED LED Lighting	
FRIDGE FEA	TURES	FREE	EZER FEATU	RES

Auto defrost

3 full width + flexi shelf

Fresh box

Dairy compartment with lid

Egg tray: 1 for 10 eggs

Auto defrost

3 full width drawers

DOOR FEATURES

Reversible doors (right as default)



Extra Tall Integrated NoFrost Fridge Freezer SCE8191VTS KEY FEATURES

		KET FEATOR
	vnamicAir Simple Touch Controls LED Lighting	TwinTech®
FRIDGE FEATURES	FREEZER FEATURES	FRIDGE FEAT
Auto defrost	Auto defrost	Auto defrost
3 full width + flexi shelf	3 full width drawers	3 full width +
Fresh box	DOOR FEATURES	2 half width sa
Dairy compartment with lid	Reversible doors (right as default)	Dairy compar
1 half width sliding door shelf		1 half width sl
Egg tray: 2 for 6 eggs		Egg tray: 2 for
Capacity Fridge: 223 ltr (gross) 219 ltr (net) Freezer: 73 ltr (gross) 64 ltr (net)	Additional Information Annual energy consumption: 307kw Noise: 39dB Power cut safe rising time: 21h Holiday mode: Yes Door fixing: Bl slide door	Capacity Fridge: 189 ltr (gross) 186 ltr (net) Freezer: 76 ltr (gross) 61 ltr (net)
Combined: 296 ltr (gross) 283 ltr (net)	Colour White	Combined: 265 Itr (gross) 247 Itr (net)
Energy Rating: A+	Appliance Dimensions (HxWxD) in mm: Combined: 1842 x 540 x 552 Built-in: 1850 x 560 x 560	Energy Rating

INTEGRATED FRIDGE FREEZERS



Integrated NoFrost Fridge Freezer with Soft Close Doors SCE8182XNC

KEY FEATURES

FEATURES	
€ NoFrost Soft C	lose Doors Touch Control LED Lighting
	iemperature Alarm
GE FEATURES	FREEZER FEATURES
defrost	Auto defrost
width + flexi shelf	3 full width drawers
f width salad drawers	DOOR FEATURES
compartment with lid	Door open alarm
width sliding door shelf	Reversible doors (right as default)
rray: 2 for 6 eggs	
city	Additional Information
e: r (gross) r (net) er: r (gross) r (net)	Annual energy consumption: 226kw Noise: 39dB Power cut safe rising time: 23h Holiday mode: Yes Door fixing: BI DoD
ined: r (gross) r (net)	Colour White
y Rating: A++	Appliance Dimensions (HxWxD) in mm: Combined: 1769 x 556 x 549 Built-in: 1780 x 560 x 550



Integrated NoFrost Fridge Freezer SCE8182XTS KEY FEATURES



Capacity	Additional Information
Fridge:	Annual energy consumption: 238kw
157 ltr (gross)	Noise: 39dB
152 ltr (net)	Power cut safe rising time: 24h
Freezer:	Holiday mode: Yes
107 ltr (gross) 87 ltr (net)	Door fixing: BI slide door
Combined:	Colour
264 ltr (gross)	
239 ltr (net)	White
Energy Rating: A++	Appliance Dimensions (HxWxD) in mm:
	Combined: 1772 x 540 x 549

Built-in: 1780 x 560 x 550

16





Integrated NoFrost Fridge Freezer SCE8181VNS KEY FEATURES

TwinTech® NoFrost Touch	n Control LED Lighting Coolmatic
FRIDGE FEATURES	FREEZER FEATURES
Auto defrost	Auto defrost
2 full width + flexi shelf	4 full width drawers
2 half width salad drawers	DOOR FEATURES
Dairy compartment with lid	Door open alarm
1 half width sliding door shelf	Reversible doors (right as default)
Egg tray: 2 for 6 eggs	
Capacity	Additional Information
Fridge:	Annual energy consumption: 303kw
157 ltr (gross)	Noise: 40dB
152 ltr (net)	Power cut safe rising time: 24h
Freezer: 107 ltr (gross)	Holiday mode: Yes
87 ltr (net)	Door fixing: Bl slide door
Combined:	
264 ltr (gross)	Colour
239 ltr (net)	White
Energy Rating: A+	Appliance Dimensions (HxWxD) in mm: Combined: 1772 x 540 x 549

Built-in: 1780 x 560 x 550



Integrated NoFrost Fridge Freezer SCE8181VTS KEY FEATURES

TwinTech® NoFrost Dyna	micAir Touch Control LED Lighting	LowFrost Simple Touch Controls
	mperature arm	
FRIDGE FEATURES	FREEZER FEATURES	FRIDGE FEATURES
Auto defrost	Auto defrost	Auto defrost
3 full width + flexi shelf	3 full width drawers	4 full width + flexi shelf
2 half width salad drawers	DOOR FEATURES	2 half width salad drawers
Dairy compartment with lid	Door open alarm	Dairy compartment with lid
1 half width sliding door shelf	Reversible doors (right as default)	Egg tray: 2 for 6 eggs
Egg tray: 2 for 6 eggs		
Capacity Fridge: 197 192 192 192 Freezer: 76 1tr (gross) 61 1tr (net) Combined: 273 273	Additional Information Annual energy consumption: 291kw Noise: 40dB Power cut safe rising time: 21h Holiday mode: Yes Door fixing: BI slide door Colour	Capacity Fridge: 199 ltr (gross) 196 ltr (net) Freezer: 73 ltr (gross) 72 ltr (net) Combined: 272 ltr (gross)
253 ltr (net) Energy Rating: A+	White Appliance Dimensions	268 ltr (net) Energy Rating: A+

(HxWxD) in mm:

Combined: 1772 x 540 x 549

Built-in: 1780 x 560 x 550

INTEGRATED FRIDGE FREEZERS



Integrated LowFrost Fridge Freezer SCB6181XLS KEY FEATURES

_	
	Manual defrost
	3 full width drawers
	DOOR FEATURES
	Reversible doors (right as default)
	Additional Information
	Additional Information Annual energy consumption: 291kw
	Annual energy consumption: 291kw
	Annual energy consumption: 291kw Noise: 36dB
	Annual energy consumption: 291kw Noise: 36dB Power cut safe rising time: 22h Holiday mode: Yes
	Annual energy consumption: 291kw Noise: 36dB Power cut safe rising time: 22h
	Annual energy consumption: 291kw Noise: 36dB Power cut safe rising time: 22h Holiday mode: Yes

FROSTMATE

Frostmatic

FREEZER FEATURES

LED Lighting

Appliance Dimensions (HxWxD) in mm: Combined: 1772 x 540 x 549 Built-in: 1780 x 560 x 550



Integrated LowFrost Fridge Freezer SCB6181VLS KEY FEATURES

Energy Rating: A+	Appliance Dimensions (HxWxD) in mm: Combined: 1772 x 540 x 549 Built-in: 1780 x 560 x 550
Combined: 269 ltr (gross) 266 ltr (net)	Colour White
Freezer: 106 ltr (gross) 106 ltr (net)	Door fixing: Bl slide door
Fridge: 163 ltr (gross) 160 ltr (net)	Annual energy consumption: 293kw Noise: 36dB Power cut safe rising time: 22h
Capacity	Additional Information
Egg tray: 2 for 6 eggs	
1 half width sliding door shelf	
Dairy compartment with lid	Reversible doors (right as default)
2 half width salad drawers	DOOR FEATURES
3 full width + flexi shelf	4 full width drawers
Auto defrost	Manual defrost
LowFrost Simple Touch LI Controls	ED Lighting Frostmatic





Integrated LowFrost Fridge Freezer SCB5142VLS KEY FEATURES





FRIDGE FEATURES

Auto defrost

3 full width + flexi shelf

2 half width salad drawers

Dairy compartment with lid

1 half width sliding door shelf

Egg tray: 2 for 6 eggs

Capacity

Fridge: 163 ltr (gross) 160 ltr (net)

Freezer: 57 ltr (gross) 57 ltr (net)

Combined: 220 ltr (gross) 217 ltr (net)

Energy Rating: A++

FREEZER FEATURES

Manual defrost

2 full width drawers

DOOR FEATURES

Reversible doors (right as default)

Additional Information

Annual energy consumption: 204kw Noise: 35dB Power cut safe rising time: 20h Door fixing: BI slide door Mechanical control


Colour White

Appliance Dimensions (HxWxD) in mm: Combined: 1441 x 540 x 549 Built-in: 1446 x 560 x 540

UNDER COUNTER FREEZERS



Integrated Under Counter NoFrost Freezer ABE6821VNF KEY FEATURES

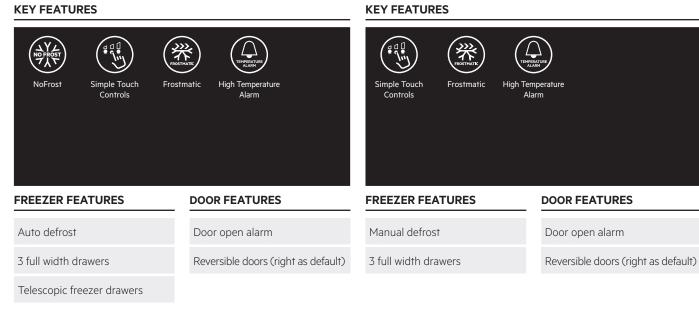

Integrated Under Counter Freezer

ABE6822VAF



Integrated Under Counter Freezer ABB6821VAF KEY FEATURES

Simple Touch Controls	n Temperature Alarm
FREEZER FEATURES	DOOR FEATURES
Manual defrost	Door open alarm
3 full width drawers	Reversible doors (right as default)

Comositu	Additional Information	Conceitu	Additional Information	Compositive	Additional Information
Capacity		Capacity		Capacity	
Fridge:	Annual energy consumption: 191kw	Fridge:	Annual energy consumption: 147kw	Fridge:	Annual energy consumption: 187kw
86 ltr (gross)	Noise: 42dB	105 ltr (gross)	Noise: 40dB	105 ltr (gross)	Noise: 38dB
85 ltr (net)	Power cut safe rising time: 13h	95 ltr (net)	Power cut safe rising time: 29h	95 ltr (net)	Power cut safe rising time: 21h
	Door fixing: BI UC DoD		Door fixing: BI UC DoD		Door fixing: BI UC DoD
	Colour		Colour		Colour
	White		White		White
Energy Rating: A+	Appliance Dimensions (HxWxD) in mm: Unit: 815 x 596 x 550 Built-in: 820 x 600 x 550	Energy Rating: A++	Appliance Dimensions (HxWxD) in mm: Unit: 815 x 596 x 550 Built-in: 820 x 600 x 550	Energy Rating: A+	Appliance Dimensions (HxWxD) in mm: Unit: 815 x 596 x 550 Built-in: 820 x 600 x 550

UNDER COUNTER FRIDGES



Integrated Under Counter Fridge with 4-Star Freezer Compartment SFB5821VAF **KEY FEATURES**



FRIDGE FEATURES

Auto defrost

2 full width glass shelves

1 full width salad drawer

Dairy compartment with lid

1 half width sliding door shelf

Egg tray: 1 for 6 eggs

Capacity

Fridge: 111 ltr (gross) 109 ltr (net)

DOOR FEATURES

Reversible doors (right as default)

Additional Information

Annual energy consumption: 172kw Noise: 38dB Power cut safe rising time: 11h Door fixing: BI UC DoD Mechanical control

Colour

White

Energy Rating: A+

Appliance Dimensions (HxWxD) in mm: Unit: 815 x 596 x 550 Built-in: 820 x 600 x 550

UNDER COUNTER FRIDGES



Integrated Under Counter Fridge with Ice Box SFE5822VAF **KEY FEATURES**



Integrated Under Counter Larder Fridge SKB5821VAF **KEY FEATURES**

LED Lighting		LED Lighting		
FRIDGE FEATURES	DOOR FEATURES	FRIDGE FEATURES	DOOR FEATURES	
Auto defrost	Reversible doors (right as default)	Auto defrost	Reversible doors (right as default)	
2 full width glass shelves		3 full width glass shelves		
1 full width salad drawer		1 full width salad drawer		
Dairy compartment with lid		Dairy compartment with lid		
1 half width sliding door shelf		1 half width sliding door shelf		
Egg tray: 1 for 6 eggs		Egg tray: 1 for 6 eggs		
Capacity Fridge: 111 Itr (gross) 109 Itr (net)	Additional Information Annual energy consumption: 139kw Noise: 37dB Door fixing: BI UC DoD Mechanical control	Capacity Fridge: 136 ltr (gross) 133 ltr (net)	Additional Information Annual energy consumption: 118kw Noise: 37dB Door fixing: BI UC DoD Mechanical control	
	Colour White		Colour White	
Energy Rating: A++	Appliance Dimensions (HxWxD) in mm: Unit: 815 x 596 x 550 Built-in: 820 x 600 x 550	Energy Rating: A+	Appliance Dimensions (HxWxD) in mm: Unit: 815 x 596 x 550 Built-in: 820 x 600 x 550	



Integrated Under Counter Larder Fridge SKE5822VAF **KEY FEATURES**

LED Lighting	
FRIDGE FEATURES	DOOR FEATURES
Auto defrost	Reversible doors (right as defaul
3 full width glass shelves	
1 full width salad drawer	
Dairy compartment with lid	
1 half width sliding door shelf	
Egg tray: 1 for 6 eggs	
Capacity	Additional Information
Fridge:	Annual energy consumption: 91kw
136 ltr (gross) 133 ltr (net)	Noise: 37dB
	Door fixing: BI UC DoD
	Mechanical control
	Colour
	White
Energy Rating: A++	Appliance Dimensions (HxWxD) in mm: Unit: 815 x 596 x 550


Built-in: 820 x 600 x 550

INTEGRATED FREEZERS





Integrated NoFrost Freezer ABK8182VNC **KEY FEATURES**



FREEZER FEATURES

Auto defrost

5 full width drawers

DOOR FEATURES

Door open alarm

Reversible doors (right as default)

Capacity

Freezer: 216 ltr (gross) 204 ltr (net)

Additional Information

Annual energy consumption: 238kw Noise: 39dB Power cut safe rising time: 24h Door fixing: BI DoD

Colour White

Energy Rating: A++

Appliance Dimensions (HxWxD) in mm: Unit: 1769 x 556 x 549

Built-in: 1780 x 560 x 550

INTEGRATED FREEZERS



Integrated NoFrost Freezer ABB8181VNC **KEY FEATURES**

	stmatic High Temperature Alarm		Controls Frostmatic High Temperature Alarm
FREEZER FEATURES	DOOR FEATURES	FREEZER FEATURES	DOOR FEATURES
Auto defrost	Door open alarm	Auto defrost	Door open alarm
5 full width drawers	Reversible doors (right as default)	4 full width drawers	Reversible doors (right as default)

DAD

ABE8122VNC

KEY FEATURES

Integrated NoFrost Freezer



Integrated NoFrost Freezer ABB8121VNF **KEY FEATURES**

NoFrost	Fouch Control	Frostmatic	High Temperature Alarm
		DOC	R FEATURES
FREEZER FEAT	URES		DR FEATORES
Auto defrost	URES		or open alarm

Capacity	Additional Information	Capacity	Additional Information	Capacity	Additional Information
Freezer:	Annual energy consumption: 303kw	Freezer:	Annual energy consumption: 183kw	Freezer:	Annual energy consumption: 232kw
216 ltr (gross)	Noise: 39dB	130 ltr (gross)	Noise: 39dB	130 ltr (gross)	Noise: 39dB
204 ltr (net)	Power cut safe rising time: 24h	120 ltr (net)	Power cut safe rising time: 22h	120 ltr (net)	Power cut safe rising time: 22h
	Door fixing: Bl DoD		Door fixing: BI DoD		Door fixing: BI DoD
	Colour		Colour		Colour
	White		White		White
Energy Rating: A+	Appliance Dimensions (HxWxD) in mm: Unit: 1769 x 556 x 549 Built-in: 1780 x 560 x 550	Energy Rating: A++	Appliance Dimensions (HxWxD) in mm: Unit: 1224 x 556 x 549 Built-in: 1225 x 556 x 550	Energy Rating: A+	Appliance Dimensions (HxWxD) in mm: Unit: 1224 x 556 x 549 Built-in: 1225 x 556 x 550





Integrated NoFrost Freezer ABE6882VLS

KEY FEATURES





Simple Touch Controls



Frostmatic



High Temperature Alarm

FREEZER FEATURES

Auto defrost

4 full width drawers

DOOR FEATURES

Reversible doors (right as default)

Capacity Freezer:

99 Itr (gross) 98 ltr (net)

Additional Information

Annual energy consumption: 200kw Noise: 35dB Power cut safe rising time: 20h Door fixing: BI DoD

Colour White

Energy Rating: A+

Appliance Dimensions (HxWxD) in mm: Unit: 873 x 540 x 549


Built-in: 880 x 560 x 550

INTEGRATED FRIDGES



Integrated LongFresh Fridge with Soft Close Doors SKK8182VZC

KEY FEATURES

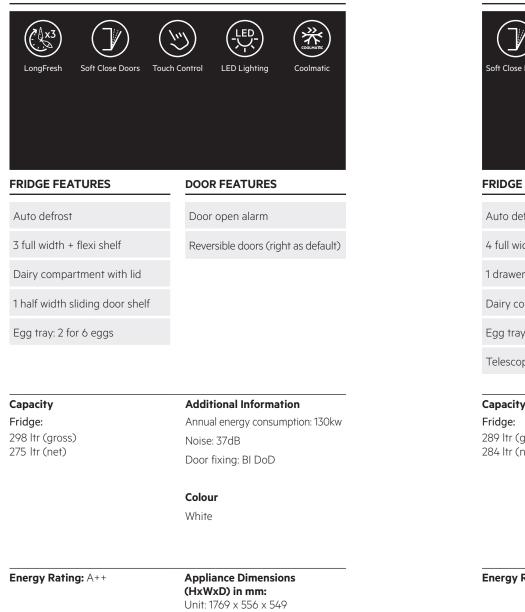

Built-in: 1780 x 560 x 550



Integrated Fridge with 4-Star Freezer Compartment SFE8182VDC **KEY FEATURES**

Soft Close Doors Simple Touch L	
Controls	
FRIDGE FEATURES	DOOR FEATURES
Auto defrost	Reversible doors (right as defaul
4 full width glass shelves	
1 drawer divider fresh box	
Dairy compartment with lid	
Egg tray: 2 for 6 eggs	
Telescopic freezer drawers	
Capacity Fridge: 289 ltr (gross) 284 ltr (net)	Additional Information Annual energy consumption: 215k Noise: 35dB Power cut safe rising time: 18h Door fixing: BI slide door
	Colour White
Energy Rating: A++	Appliance Dimensions (HxWxD) in mm: Unit: 1772 x 540 x 549 Built-in: 1780 x 560 x 550



LongFresh

The LongFresh feature is a Zero Degree compartment with adjustable temperature settings and separate humidity. To maintain the deep blushing crimson of a fillet of beef, to ensure the sweet freshness of a lobster tail, or to hold the ultimate flavour of fresh fruit they must be treated and chilled with precision. The two Zero Degree compartments in the AEG refrigerator allow you to choose and adjust the humidity and temperature settings in each drawer. Ensure that each element is at peak condition, by chilling them in unique conditions.





Integrated Fridge with Soft Close Doors SKK8182VDC **KEY FEATURES**











t Close Doors

DynamicAir







RIDGE FEATURES

Auto defrost

4 full width + flexi shelf

drawer divider fresh box

Dairy compartment with lid

half width sliding door shelf

Egg tray: 2 for 6 eggs

Capacity

ridge: 14 Itr (gross) 10 ltr (net)

DOOR FEATURES

Door open alarm

Reversible doors (right as default)

Additional Information

Annual energy consumption: 114kw Noise: 35dB Holiday mode: Yes Door fixing: BI DoD

Colour White

nergy Rating: A++

Appliance Dimensions (HxWxD) in mm: Unit: 1769 x 556 x 549 Built-in: 1780 x 560 x 550

27

INTEGRATED FRIDGES



Integrated Fridge with Soft Close Doors SKB8181VDC KEY FEATURES

Soft Close Doors DynamicAir Touc	ch Control LED Lighting Coolmatic	Soft Close Doors Touch Control LED	D Lighting Coolmatic
FRIDGE FEATURES	DOOR FEATURES	FRIDGE FEATURES	DOOR FEATURES
Auto defrost	Door open alarm	Auto defrost	Door open alarm
4 full width + flexi shelf	Reversible doors (right as default)	3 full width + flexi shelf	Reversible doors (right as default)
1 drawer divider fresh box		2 half width salad drawers	
Dairy compartment with lid		Dairy compartment with lid	
1 half width sliding door shelf		1 half width sliding door shelf	
Egg tray: 2 for 6 eggs		Egg tray: 2 for 6 eggs	
Capacity	Additional Information	Capacity	Additional Information
Fridge:	Annual energy consumption: 142kw	Fridge:	Annual energy consumption: 103kw
314 ltr (gross) 310 ltr (net)	Noise: 35dB	205 ltr (gross) 202 ltr (net)	Noise: 35dB
	Holiday mode: Yes		Holiday mode: Yes
	Door fixing: Bl DoD		Door fixing: BI DoD
	Colour		Colour
	White		White
Energy Rating: A+	Appliance Dimensions (HxWxD) in mm:	Energy Rating: A++	Appliance Dimensions (HxWxD) in mm:

SKE8122VAC

KEY FEATURES

Integrated Fridge with Soft Close Doors



Integrated Fridge SKB8121VAF KEY FEATURES

(hu)

Touch Control



Coolmatic

FRIDGE FEATURES	DOOR FEATURES
Auto defrost	Door open alarm
3 full width + flexi shelf	Reversible doors (right as default)
2 half width salad drawers	
Dairy compartment with lid	
1 half width sliding door shelf	
Egg tray: 2 for 6 eggs	
Capacity	Additional Information
Fridge:	Annual energy consumption: 131kw
205 ltr (gross)	Noise: 35dB
202 ltr (net)	Holiday mode: Yes
	Door fixing: BI DoD

	Colour White		Colour White		Colour White
Energy Rating: A+	Appliance Dimensions (HxWxD) in mm: Unit: 1769 x 556 x 549 Built-in: 1780 x 560 x 550	Energy Rating: A++	Appliance Dimensions (HxWxD) in mm: Unit: 1219 x 556 x 550 Built-in: 1225 x 560 x 550	Energy Rating: A+	Appliance Dimensions (HxWxD) in mm: Unit: 1219 x 556 x 550 Built-in: 1225 x 560 x 550





Integrated Fridge with 4-Star Freezer Compartment SFE6881VAS **KEY FEATURES**



FRIDGE FEATURES

Auto defrost

2 full width glass shelves

1 large salad drawer

Dairy compartment with lid

1 half width sliding door shelf

Egg tray: 2 for 6 eggs

Capacity

Fridge: 125 ltr (gross) 123 ltr (net)

DOOR FEATURES

Reversible doors (right as default)

Additional Information

Annual energy consumption: 151kw Noise: 38dB Power cut safe rising time: 12h Door fixing: BI slide door Mechanical control

Colour

White

Energy Rating: A++

Appliance Dimensions (HxWxD) in mm: Unit: 873 x 540 x 549 Built-in: 880 x 560 x 550

29

INTEGRATED FRIDGES



Integrated Fridge with Soft Close Doors SKE6881VAS **KEY FEATURES**

KEY FEATURES		KEY FEATURES	
LED Lighting		NoFrost Multi Air Flow Tv MultiSwitch	vinTech® CustomFlex®
FRIDGE FEATURES	DOOR FEATURES	FRIDGE FEATURES	FREEZER FEATURES
Auto defrost	Reversible doors (right as default)	Auto defrost	Auto defrost
3 full width glass shelves		1 full width + flexi shelf	2 full width drawers
1 large salad drawer		2 half width salad drawers	DOOR FEATURES
Dairy compartment with lid		Dairy compartment with lid	Door open alarm
1 half width sliding door shelf		1 half width sliding door shelf	Left & right door opening
Egg tray: 2 for 6 eggs		Egg tray: 1 for 12 eggs	MultiSwitch drawers
Capacity Fridge: 143 ltr (gross) 142 ltr (net)	Additional Information Annual energy consumption: 96kw Noise: 38dB Door fixing: BI slide door Mechanical control Colour White	Capacity Fridge: 413 ltr (gross) 363 ltr (net) Freezer: 267 ltr (gross) 178 ltr (net)	Additional Information Annual energy consumption: 448kw Noise: 42dB Colour Stainless Steel
Energy Rating: A++	Appliance Dimensions (HxWxD) in mm: Unit: 873 x 540 x 549 Built-in: 880 x 560 x 550	Energy Rating: A+	Appliance Dimensions (HxWxD) in mm: 1780 x 912 x 758

AMERICAN SIDE BY SIDES



French Door Fridge Freezer RMB96716CX KEY FEATURES

American Style F	ridge Fre	eezer	
RMB76111NX			
KEY FEATURES			

NoFrost Multi A		D Touch Display	LED Lighting	Coolmatic	
	nperature Ice a	nd Water			
	FRIDGE FEATURES			RES	
Auto defrost		Auto	Auto defrost		
4 full width glass shelves		2 full	2 full width drawers		
Fresh box		DOO	R FEATURES		
Large pull out salad drawer		Door	^r open alarm		
Dairy compartment with lid		Side	by side door o	pening	

Dairy compariment with lid	Side by side door opening		
Egg tray	2 shelves		
Capacity	Additional Information		
Fridge:	Annual energy consumption: 467kw		
380 ltr (gross)	Noise: 43dB		
370 ltr (net)	Power cut safe rising time: 10h		
Freezer:	Holiday mode: Yes		
228 ltr (gross) 179 ltr (net)			
	Colour		
Combined:	Stainless Steel		
608 ltr (gross) 549 ltr (net)	Statilless Steel		

Energy Rating: A+

Appliance Dimensions **(HxWxD) in mm:** 1780 x 912 x 738







NoFrost LCD Touch LED I Display High Temperature Ice and Water	ED Lighting Coolmatic Frostmatic		
FRIDGE FEATURES	FREEZER FEATURES		
Auto defrost	Auto defrost		
2 full width glass shelves	2 full width trays + 1 drawer		
2 half width salad drawers	2 half width trays + 1 drawer		
Large pull out salad drawer	Telescopic freezer drawers		
2 dairy compartments with lid	DOOR FEATURES		
Wine rack	Left & right door opening		
Capacity	Additional Information		
Fridge: 436 ltr (gross)	Annual energy consumption: 410kw		
417 ltr (net)	Noise: 43dB		
Freezer:	Power cut safe rising time: 12h Holiday mode: Yes		
194 ltr (gross) 119 ltr (net)			
Combined:	Colour		
630 ltr (gross) 536 ltr (net)	Stainless Steel		

Energy Rating: A+

Appliance Dimensions **(HxWxD) in mm:** 1776 x 912 x 765

FRIDGE FREEZERS






CustomFlex® Fridge Freezer RCB53724VX KEY FEATURES



FRIDGE FEATURES	FREEZER FEATURES
Auto defrost	Auto defrost
3 full width + flexi shelf	2 full width + 1 half depth drawers
1 bottle rack	2 half width + 1 half depth drawers
Dairy compartment with lid	DOOR FEATURES
Egg tray for 8 eggs	Reversible doors (right as default)



CustomFlex® Fridge Freezer RCB53324VX KEY FEATURES



Additional Information

Noise: 43dB

Stainless Steel

Appliance Dimensions

(HxWxD) in mm:

1845 x 595 x 647

Colour

Annual energy consumption: 237kw

Power cut safe rising time: 20h

Auto defrost	Auto defrost
3 full width + flexi shelf	2 full width + 1 half depth drawers
1 bottle rack	2 half width + 1 half depth drawers
Dairy compartment with lid	DOOR FEATURES
Egg tray for 8 eggs	Reversible doors (right as default)

Also available: RCB53324VW - White

Capacity	Additional Information	Capacity	
Fridge:	Annual energy consumption: 248kw	Fridge:	
261 ltr (gross) 250 ltr (net)	Noise: 43dB	223 ltr (gross) 214 ltr (net)	
	Power cut safe rising time: 18h		
Freezer: 109 ltr (gross) 91 ltr (net)	Holiday mode: Yes	Freezer: 109 ltr (gross) 91 ltr (net)	
Combined: 370 ltr (gross) 341 ltr (net)	Colour Stainless Steel	Combined: 332 ltr (gross) 305 ltr (net)	
Energy Rating: A++	Appliance Dimensions (HxWxD) in mm: 2005 x 595 x 647	Energy Rating: A++	
	2003 x 393 x 047		

Also available: RCB53724VW – White



V. 1.1 10 1.00 mich. CustomFlex® Fridge Freezer RCB53725VX **KEY FEATURES** E 111 NoFrost TwinTech® CustomFlex® Multi Air Flow Touch Contro FROSTMATEC LED Lighting Coolmatio Frostmatic FRIDGE FEATURES FREEZER FEATURES Auto defrost Auto defrost 3 full width + flexi shelf 2 full width + 1 half depth drawers 2 half width + 1 half depth drawers 1 bottle rack DOOR FEATURES Dairy compartment with lid Egg tray for 8 eggs Reversible doors (right as default) CustomFlex® rack system Capacity **Additional Information** Fridge: Annual energy consumption: 248kw 261 ltr (gross) Noise: 43dB 250 ltr (net) Power cut safe rising time: 20h Freezer: 109 ltr (gross) Colour 91 ltr (net) Stainless Steel Combined:


Energy Rating: A++

341 ltr (net)

370 ltr (gross)

Appliance Dimensions (HxWxD) in mm: 2005 x 595 x 647

Also available: RCB53725VW - White

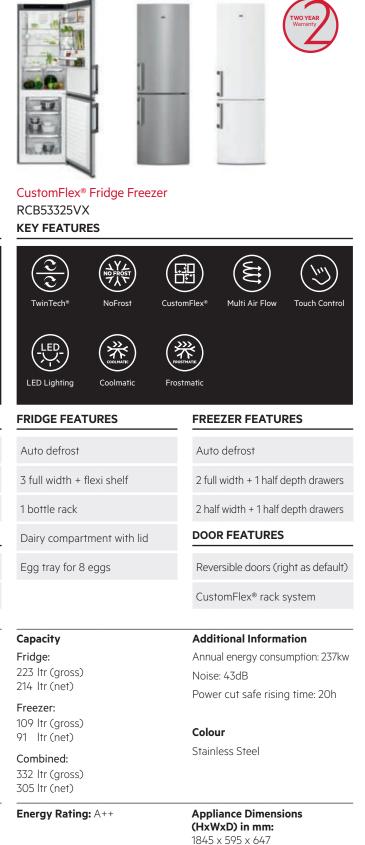

FRIDGE FREEZERS





CustomFlex[®] Fridge Freezer RCB83724VX **KEY FEATURES**

TwinTech® NoFrost CL	IstomFlex® Multi Air Flow LCD Control	NoFrost Touch Control	Frostmatic High Temperature Alarm
LED Lighting Coolmatic F	rostmatic High Temperature Alarm		
FRIDGE FEATURES	FREEZER FEATURES	FREEZER FEATURES	DOOR FEATURES
Auto defrost	Auto defrost	Auto defrost	Reversible doors (right as default)
2 full width + flexi shelf	2 full width + 1 half depth drawers	4 full width drawers	
1 bottle rack	2 half width + 1 half depth drawers		
Dairy compartment with lid	DOOR FEATURES		
Egg tray for 8 eggs	Reversible doors (right as default)		
	CustomFlex® rack system		
Capacity Fridge: 266 ltr (gross) 258 ltr (net)	Additional Information Annual energy consumption: 251kw Noise: 46dB	Capacity Freezer: 100 ltr (gross) 80 ltr (net)	Additional Information Annual energy consumption: 188kw Noise: 45dB
Freezer: 111 ltr (gross) 92 ltr (net)	Power cut safe rising time: 19h Colour		Power cut safe rising time: 13h Colour
Combined: 377 ltr (gross) 350 ltr (net)	Stainless Steel		Stainless Steel
Energy Rating: A++	Appliance Dimensions	Energy Rating: A+	Appliance Dimensions

(HxWxD) in mm: 2000 x 595 x 647

UNDER COUNTER FREEZERS




(HxWxD) in mm:

850 x 595 x 635

Also available: ATB8101VNW - White

NoFrost Under Counter Freezer ATB8101VNX **KEY FEATURES**



Touch Control Frostmatic	High Temperature Alarm
FREEZER FEATURES	DOOR FEATURES
Manual defrost	Reversible doors (right as default)
1 full width drawer	
1 Maxi drawer	

acity	Additional Information	Capacity	Additional Information
zer:	Annual energy consumption: 188kw	Freezer:	Annual energy consumption: 145kw
ltr (gross) Noise: 45dB ltr (net) Power cut safe rising time: 13h	Noise: 45dB	110 ltr (gross)	Noise: 39dB
	92 ltr (net)	Power cut safe rising time: 24h	
	Colour		Colour
	Stainless Steel		Stainless Steel

Energy Rating: A++ **Appliance Dimensions** (HxWxD) in mm: 850 x 595 x 635

Also available: RCB83724VW – White

UNDER COUNTER FRIDGES



Under Counter Larder Fridge RTB8152VAX **KEY FEATURES**



FRIDGE FEATURES

Auto defrost

2 full width glass shelves

1 full width salad drawer

Dairy compartment with lid

Egg tray: 2 for 6 eggs

DOOR FEATURES

Reversible doors (right as default)

Capacity

Fridge: 155 ltr (gross) 152 ltr (net)

Additional Information

Annual energy consumption: 94kw Noise: 38dB Mechanical control

Colour

Stainless Steel

Energy Rating: A++

Appliance Dimensions (HxWxD) in mm:

850 x 595 x 635

CABINET FREEZERS



AGE62526NX KEY FEATURES

NoFrost Touch Control	Frostmatic High Temperature Alarm	NoFrost Touch Control	Frostmatic High Temperature Alarm
FREEZER FEATURES	DOOR FEATURES	FREEZER FEATURES	DOOR FEATURES
Auto defrost	Door open alarm	Auto defrost	Door open alarm
2 full width drawers	Reversible doors (right as default)	4 full width drawers	Reversible doors (right as default)
3 Maxi drawers			

1850 x 595 x 668

Capacity	Additional Information	Capacity	Additional Information
Freezer:	Annual energy consumption: 229kw	Freezer:	Annual energy consumption: 201kw
250 ltr (gross) 229 ltr (net)	Noise: 42dB	225 ltr (gross)	Noise: 43dB
	Power cut safe rising time: 20h	177 ltr (net)	Power cut safe rising time: 28h
	Colour		Colour
	Stainless Steel		Stainless Steel
Energy Rating: A++	Appliance Dimensions (HxWxD) in mm:	Energy Rating: A++	Appliance Dimensions (HxWxD) in mm:

Also available: AGB62226NW - White

1550 x 595 x 668

L. State

STATISTICS.

-

SUC.

AGB62226NX

KEY FEATURES

NoFrost Cabinet Freezer

CABINET FRIDGES



Cabinet Larder Fridge RKE64021DX KEY FEATURES

DynamicAir Touch Control LE	ED Lighting Coolmatic
FRIDGE FEATURES	DOOR FEATURES
Auto defrost	Door open alarm
4 full width glass shelves	Reversible doors (right as default)
1 bottle rack + bottle slider	

2 full width salad drawers

Dairy compartment with lid

Egg tray for 6 eggs

Capacity Fridge: 400ltr (gross) 395 ltr (net) Additional Information

Annual energy consumption: 117kw Noise: 39dB Holiday mode: Yes

Colour Stainless Steel

Energy Rating: A++ Appliance Dimensions (HxWxD) in mm: 1850 x 595 x 668

Also available: RKE64021DW - White

Also available: AGE62526NW - White





FRIDGE FEATURES

Auto defrost

4 full width glass shelves

2 full width salad drawers

Dairy compartment with lid

Egg tray for 6 eggs

DOOR FEATURES

Reversible doors (right as default)

Capacity

Fridge: 317 ltr (gross) 314 ltr (net)

Additional Information

Annual energy consumption: 109kw Noise: 39dB

Colour

Stainless Steel

Energy Rating: A^{++}

Appliance Dimensions (HxWxD) in mm:

1850 x 595 x 668

WINE COOLING

Our Wine Cellar Range has dedicated technology for optimal wine storage, to store your wine bottles at the perfect temperature throughout the cooler.

Our wine cellars have a single temperature zone with a range of 5–20, providing the perfect environment for your wine. The UV protected glass door helps to protect your wine from light damage and our internal fan ensures a stable, consistent temperature.




WINE COOLING

WINE COOLERS



Undercounter 46 Bottle Wine Cooler SWE66001DG **KEY FEATURES**

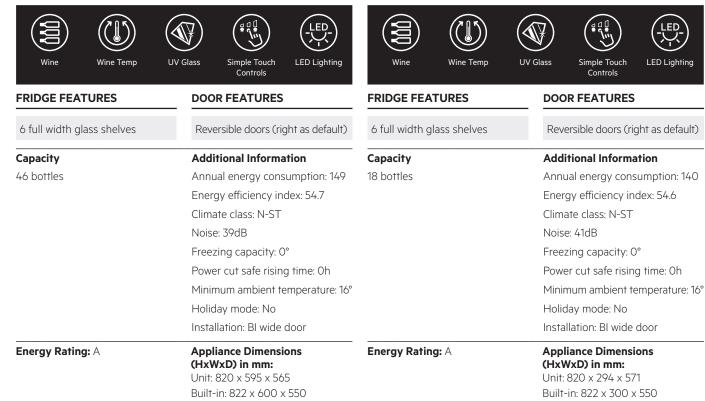



Undercounter 18 Bottle Wine Cooler SWE63001DG

KEY FEATURES



Undercounter 7 Bottle Wine Cooler SWE61501DG **KEY FEATURES**

Wine Wine Temp	UV Glass Simple Touch Controls	LED Lighting	
FRIDGE FEATURES	DOOR FEATURES	FEATURES	DOOR FEATURES
6 full width glass shelves	Right opening	2 full width shelves	Drop down opening
Capacity	Additional Information	Capacity	Additional Information
7 bottles	Annual energy consumption: 137	24 bottles	Annual energy consumption: 83kw
	Energy efficiency index: 0		Energy efficiency index: 32.5
	Climate class: N-ST		Climate class: NT
	Noise: 41dB		Noise: 39dB
	Freezing capacity: 0°		Electronic control
	Power cut safe rising time: Oh		Minimum ambient temperature: 1
	Minimum ambient temperature: 16°		Door fixing: BI Drop down
	Holiday mode: No		
	Installation: BI wide door		
Energy Rating: A	Appliance Dimensions (HxWxD) in mm: Unit: 870 x 148 x 526 Built-in: 872 x 150 x 550	Energy Rating: A++	Appliance Dimensions (HxWxD) in mm: Unit: 455 x 595 x 566 Built-in: 450 x 560 x 550

COMPACT WINE COOLER





Compact Wine Cooler KWK884520M **KEY FEATURES**



OVENS

However you like to cook and whatever your favourite dishes, there's an AEG oven that's just right for you.

Featuring our intelligent technology, every oven makes it effortless and enjoyable to create great tasting food, exactly the way you like it.

IN THIS SECTION

Single Ovens	50-58
Built-in Double Ovens	59–61
Built Under Double Ovens	62–63
Compacts	64–74
Microwave Ovens	75–77
Blackline Range	78–83





RARE, MEDIUM, WELL DONE. AT YOUR COMMAND.



Command Wheel

An innovative Command Wheel removes the need for a busy dashboard and makes the cooking experience simple and streamlined for perfection on a plate, every time. The latest furniture trends are becoming more linear and we have designed our products in line with that. We've also included more glass and less stainless steel for a seamless finish.









(Vp)

SenseCook

By precisely measuring the core temperature of your food, the Food Sensor lets you know when your rare, medium or well done meat is ready. It also allows you to cook fish, casseroles and vegetables just the way you like them.



SurroundCook®

Expect even, every time with SurroundCook[®]. Every part of your dish receives the exact consistent heat that it needs.



Pyrolytic Self Cleaning

A total self-cleaning function that automatically locks the oven door and heats up to 500°C, turning food residue to ash.

STEAM. YOUR NEW STANDARD FOR FLAVOUR.

For maximum flavour, add steam.


By adding steam to traditional heat, our range of ovens ensure your dishes are cooked to your exact preference.





Why steam?

- Food stays moist Prevents food from drying out.
- **Preservation** Preserves nutrients, vitamins and minerals.
- Evenly cooked Cooks food more evenly from surface to core.
- More efficient Delivers heat more efficiently to the food than dry, hot air, so the temperature can be lower.









 (\Box)

SteamPro

SteamPro with SousVide means you can create tastier and healthier dishes. Cook with absolute purity, sealing in all the aromas, taste and nutrients under vacuum, then applying gentle steam heat to cook delicious dishes.



SteamBoost

Turn flavour up to full, whether you are baking, roasting, poaching or steaming with SteamBoost. The right amount of steam locks in the natural moisture to deliver juicy and succulent dishes.



SteamCrisp

By combining steam and traditional heat, food is cooked gently from the outside to the centre, enhancing food taste and achieving better results. Perfect for all your favourite roasting and baking recipes.

A GUIDE TO COOKING ICONS

KEY FEATURES



Our SteamPro multifunctional ovens provide you with the SousVide function. a powerful tool that has been used by professional chefs for many years. They also include all of the benefits of our SteamBoost and SteamCrisp models.



The introduction of steam makes all the difference, locking in the natural moisture to deliver a whole range of juicy and succulent dishes including meat, fish, casseroles and vegetables even desserts. Our SteamBoost models have 3 levels of steam (humidity), low,



medium and high.

By combining steam (to produce low humidity) and traditional heat in the Quarter steam programme, food is cooked gently from the outside to the centre, enhancing food taste and achieving better results. Perfect for cooking the Sunday roast.



Adds a bit of steam for the right colour and crust, improving all of your baking results.



Hot air fan that circulates the air more effectively than a conventional oven so that your food gets evenly cooked anywhere in the oven.



Food sensor that adapts to what you are cooking and helps you get the results your are aiming for. Just tell the oven how you want your dish cooked and the oven will let you know once your food has reached the right temperature.



Multifunction ovens have all of the familiar cooking functions, including our extra large hot air fan.

Dual Multifunction

Both oven cavities are multifunctional. which means they have all of the traditional cooking functions including True Fan.

Command Wheel

The Command Wheel gives you an intuitive way to operate all the cooking settings. It swiftly responds to your actions so that you always have control of every step of the cooking process.

ProSight Touch Controls

Full-touch electronic control panel – simple to operate and beautifully designed.



High quality finish stainless steel retractable knobs.

Pyrolytic

With our Pyrolysis function, this self cleaning oven heats up to 500°C and turns food residue to ash.



The Fan Cover has a special cleaning coating, activated at high temperature to remove grease from this hard to access area.



Ensures a smooth and soundless door closing, delivering a good feeling time after time.

Catalytic Liners

The catalytic lining absorbs the grease from cooking and is activated by regular heating to 220°C. The grease residue is oxidised leaving the catalytic surface clean.



Enamel Liners

Ultra smooth enamel interior that results in easy cleaning.



All of our single ovens have an extra large capacity, allowing you to cook on all 5 levels simultaneously.



Allows you to pull the shelves smoothly out of the oven. This enables you to efficiently and safely access the contents of your oven.



Precise timer that switches off the oven when you want. Ideal for dishes with a long cooking process.



Seal your food under a range of air extraction levels, from 50% – 99% efficiency, ensuring that marinades don't leak from the bag and that no unnecessary air enters it.



Self ventilating microwaves allow for more flexibility when installing.



Flexible cooking thanks to microwave functions and integrated quartz grill.

FUNCTIONS



SousVide Cooking

SousVide cooking is a cooking technology used by professional chefs to cook vacuum packed food slowly at a low, accurately controlled temperature.










The SteamBoost oven with Full Steam function makes more of the flavours within your food. Combining all traditional oven functions with the added benefit of steam.



pastries, as it keeps the pastry crisp.



Heat from the top element is circulated by the fan, sealing and crisping the food.



Fully controllable powerful grill, ideal for family-sized portions of food.



An improved version of the traditional True Fan cooking, combining steam with an extra large hot air fan.



Designed to ensure pastry bases, quiches and pizzas are cooked to your taste.



Suitable for meat, poultry, oven dishes and casseroles. Thanks to the combination of 25% steam and 75% heat, meat gets a tender and juicy texture along with a crusty surface.



True Fan Cooking

Our True Fan Cooking system gently circulates hot air through the oven cavity. As the oven heats up faster, lower temperatures and shorter cooking times are used to achieve



Top and bottom elements heat the oven.

For dishes such as lasagne or potato gratin.



Combining grill, fan and bottom heat to efficiently produce delicious dishes. Excellent on semi-processed food such as chips and spring rolls.







Humidity High



This function is suitable for cooking stewed and braised meat as well as bread and sweet yeast dough. Due to the combination of steam and heat the meat gets a juicy and tender texture and yeast dough bakes get a crispy and shiny surface.


Humidity Low

the oven in an energy efficient way.



Two slow cook options, dependent on the quantity of food being cooked. Low temperature combined with patience will guarantee a good result.







Conventional Cooking





providing traditional cooking on one shelf position, which is ideal for baking breads or fruitcakes.





Ovens

Oven is heated by the bottom element only. Food is gently reheated, ideal for pies and

Steam Assisted Fan Cooking

Retains moisture within the oven, thus achieving light fluffy results whilst using

Defrost your frozen food gently in half the usual time. Hot air is quickly circulated inside



Optimum temperature and environment for baking yeast mixtures. Using radiant heat and steam to bake a variety of loaves to your taste.



Creates the perfect environment to assist bread baking by proving your yeast mixture correctly.



Economical setting for roasting large joints or poultry. Simply select the appropriate cooking time depending on the weight of the food, and the oven automatically switches off once the cooking is complete.




A total self-cleaning function that heats up to 500°C and turns food residue to ash.



25% steam and 75% heat locks in moisture and browns the outside for irresistible flavours.





Combines traditional microwave and grill functions.



Provides ease of use with defrosting, just select the food type and weight and the oven does the rest.



The Auto favourite function has 3 pre-set functions: Soften Butter, Melt Chocolate and Mug Cake. You can overwrite these with your favourite recipes.



Setting the child lock function will prevent your little ones from switching on the oven.

SteamPro, with SousVide allows you to create tastier and healthier dishes. Cook with absolute purity, sealing in all the aromas, taste and nutrients under vacuum, then applying gentle steam heat to cook delicious dishes.

Vac Sealer

The AEG vacuum sealer drawer helps you to be a SousVide pro chef at home, by sealing in the flavour, moisture and nutrients of ingredients allowing you to cook them to perfection.



STEAM OVENS



SousVide Multifunction Oven with Command Wheel Control BSK892330M

KEY FEATURES



Model Features Steam cleaning Quadruple door glazing Enamel liners Fully programmable timer TFT display Steam set 70 ltr oven capacity Fast heat up Double halogen lighting Two shelves Energy Rating: A++ Appliance/Built-in Dimensions



(HxWxD) in mm: 594 x 595 x 567 / 590 x 560 x 550



SousVide Multifunction Oven BSK792320M **KEY FEATURES**

SteamPro ProSight Touch Controls	SurroundCook® Soft Motion Multifunction
OVEN FUNCTIONS	
SousVide Cooking	Bottom Heat
💮 Full Steam	Dizza Setting
Humidity High	(a) Moist Fan Baking
Humidity Medium	(I°C) Slow Cooking
Humidity Low	Defrost
🛞 True Fan Cooking	(RATIN) Au Gratin
Conventional Cooking	🛞 Bread Baking
🛞 Turbo Grilling	Dough Proving
Grilling	
Model Features	

Energy Rating: A+	Appliance/Built-in Dimensions (HxWxD) in mm: 594 x 595 x 567 / 590 x 560 x 550
Two shelves	
Double halogen lighting	
Fast heat up	30°C – 230°C
70 ltr oven capacity	Steam set
White Touch Control Display	XXL meat/grill pan
Fully programmable timer	XXL baking tray
Enamel liners	Telescopic runners
Steam cleaning	Quadruple door glazing
Model Features	



Full Steam Oven with Command Wheel Control BSK882320M

KEY FEATURES



Model Features	
Steam cleaning	
Enamel liners	

Dizza Setting

Steam cleaning	Quadruple door glazing
Enamel liners	Telescopic runners
Fully programmable timer	XXL baking tray
TFT display	Steam set
70 ltr oven capacity	Patisserie tray
Fast heat up	30°C – 230°C
Double halogen lighting	
Two shelves	

Energy Rating: A+

Appliance/Built-in Dimensions (HxWxD) in mm: 594 x 595 x 567 / 590 x 560 x 550

STEAM OVENS



Multifunction Steam Oven BSK782320M

KEY FEATURES		KEY FEATURES	
SteamBoost ProSight Touch Controls SenseCoo	k SurroundCook® Soft Motion Multifunction	Pyrolytic SteamCrisp SenseCook	SurroundCook® Soft Motion Multifunction
💮 Full Steam	😩 Moist Fan Baking	(😙 True Fan Cooking	Dough Proving
Humidity High	(rc) Slow Cooking	Conventional Cooking	(antin) Au Gratin
(Humidity Low	C Defrost	(🐨) Turbo Grilling	() Humidity Low
(P) True Fan Cooking	Bread Baking	(The second seco	(rc) Slow Cooking
Conventional Cooking	Dough Proving	Bottom Heat	(LYSE) Pyrolysis
Turbo Grilling		Pizza Setting	
Grilling		Moist Fan Baking	
Bottom Heat		🗱 Defrost	
Dizza Setting		🛞 Bread Baking	
Model Features		Model Features	
Steam cleaning	Quadruple door glazing	Fully programmable timer	30°C – 300°C
Enamel liners	2 pairs of telescopic runners	White LED display	Telescopic runners
Fully programmable timer	XXL baking tray	71 ltr oven capacity	Touch Control
White Touch Control Display	XXL meat/grill pan	Fast heat up	Two shelves
70 ltr oven capacity	Steam set	Double halogen lighting	1 quick, 1 normal and 1 intense self
Fast heat up	30°C – 230°C	Quadruple door glazing	cleaning function
Double halogen lighting		XXL baking tray	
Two shelves		XXL meat/grill pan	
Energy Rating: A+	Appliance/Built-in Dimensions (HxWxD) in mm: 594 x 595 x 567 / 590 x 560 x 550	Energy Rating: A+	Appliance/Built-in Dimensions (HxWxD) in mm: 594 x 595 x 567 / 590 x 560 x 550

QUARTER STEAM OVENS



Quarter Steam Oven with Pyrolytic Self Cleaning BSK774320M



Quarter Steam Oven with Pyrolytic Self Cleaning BSK574221M

KEY FEATURES

Pyrolytic SteamCrisp SenseCook	SurroundCook® Soft Motion Multifunction
OVEN FUNCTIONS	
🛞 True Fan Cooking	(TYRO) Pyrolysis
Conventional Cooking	
🗑 Turbo Grilling	
(^m) Grilling	
Bottom Heat	
D Pizza Setting	
Moist Fan Baking	
Defrost	
(Steam Assisted Fan Cooking	
Model Features	
Fully programmable timer	30°C − 300°C
White LED display	Two shelves
71 ltr oven capacity	1 normal and 1 intense self
Fast heat up	cleaning function
Lighting	
Quadruple door glazing	
XXL baking tray	
XXL meat/grill pan	
Energy Rating: A+	Appliance/Built-in Dimensions (HxWxD) in mm: 594 x 596 x 568 / 600 x 560 x 550




AEG pyrolytic ovens have up to 3 Pyrolysis self cleaning functions: quick, normal or intense. Perfect for the weekly, monthly or quarterly

PYROLYTIC SELF CLEANING OVENS



Pyrolytic Self Cleaning Multifunction Oven BPK842720M

KEY FEATURES

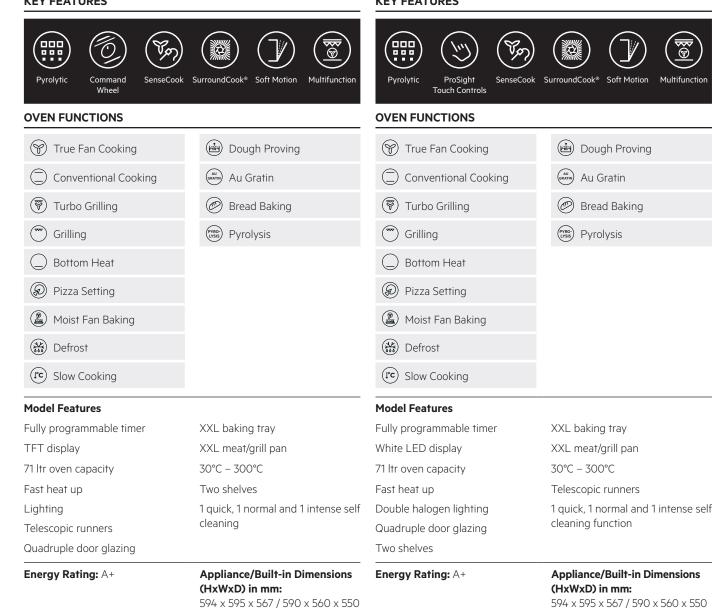



Pyrolytic Self Cleaning Multifunction Oven BPK742320M

<u></u>

KEY FEATURES



Side Hinged Multifunction Oven with Pyrolytic Self Cleaning BPK744L21M


KEY FEATURES

Energy Rating: A+	Appliance/Built-in Dimensions (HxWxD) in mm: 594 x 594 x 568 / 600 x 560 x 550	
XXL baking tray		
Quadruple door glazing		
Double halogen lighting	cleaning function	
Fast heat up	1 quick, 1 normal and 1 intense self	
White LED display 71 ltr oven capacity	Telescopic runners Two shelves	
Fully programmable timer	30°C – 300°C	
Model Features		
(rc) Slow Cooking		
Defrost		
Moist Fan Baking		
Dizza Setting		
Bottom Heat	Pyrolysis Pyrolysis	
Grilling	🛞 Eco Roasting	
🐨 Turbo Grilling	Bread Baking	
Conventional Cooking	GRATIN) Au Gratin	
🛞 True Fan Cooking	Dough Proving	
OVEN FUNCTIONS		
Pyrolytic ProSight Side Hinged Touch Controls	SenseCook SurroundCook* Multifunction	
	(V) () (V) ()	



Pyrolytic Self Cleaning Multifunction Oven BPK642020M

KEY FEATURES

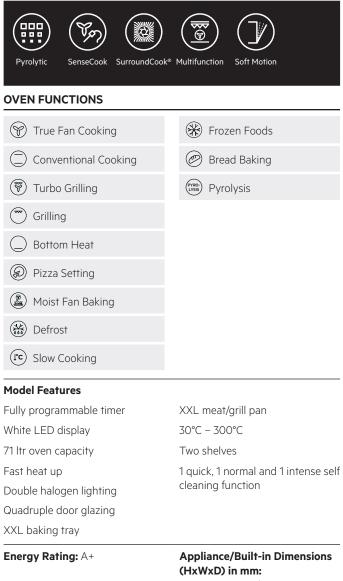

594 x 595 x 567 / 590 x 560 x 550

Ovens

SINGLE OVENS

PYROLYTIC STEAMBAKE[™] OVENS





SteamBake[™] Oven with Pyrolytic Self Cleaning BPK552220M

KEY FEATURES



OVEN FUNCTIONS





594 x 595 x 567 / 590 x 560 x 550

Also available: BPK552220W – White / BPE552220B – Black



SteamBake[™] Oven with Pyrolytic Self Cleaning BPK351020M

KEY FEATURES

Pyrolytic SteamBake [™] SurroundCool	(* Multifunction
OVEN FUNCTIONS	
(😙 True Fan Cooking	
Conventional Cooking	
(🖗) Turbo Grilling	
Grilling	
Bottom Heat	
Dizza Setting	
Moist Fan Baking	
Defrost	
(YRO) VYSS Pyrolysis	
Model Features	
Fully programmable timer	30°C – 300°C
White LED display	1 normal and 1 intense self
71 ltr oven capacity	cleaning function
Single halogen lighting	
Quadruple door glazing	
XXL baking tray	
XXL meat/grill pan	
Energy Rating: A+	Appliance/Built-in Dimensions (HxWxD) in mm: 594 x 595 x 567 / 590 x 560 x 550



SteamBake™

The SteamBake[™] function adds the right amount of humidity at the start of the cooking process, allowing for better dough texture, greater rise and the perfect crust – resulting in great tasting baking results every time.



STEAMBAKE™ OVENS



SteamBake[™] Oven with CataFan BCK452210M

KEY FEATURES



OVEN FUNCTIONS



Model Features

Energy Rating: A	Appliance/Built-in Dimensions	
XXL meat/grill pan		
XXL baking tray		
Triple door glazing		
Single halogen lighting	Touch buttons on timer	
71 ltr oven capacity	Telescopic runners	
White LED display	50°C – 275°C	
Touch control fully programmable timer		

(HxWxD) in mm: 594 x 595 x 567 / 590 x 560 x 550

STEAMBAKE™ OVENS



SteamBake[™] Multifunction Oven BEK351010M

KEY FEATURES

SteamBake™	SurroundCook®	Multifunction	
OVEN FUNCTIONS			

🛞 True Fan Cooking

Conventional Cooking

🐨 Turbo Grilling

🐨 Grilling

Bottom Heat

Dizza Setting

🙆 Moist Fan Baking

Defrost

Model Features

Energy Rating: A		
Triple door glazing		
Single halogen lighting		
71 ltr oven capacity		
White LED display		
Fully programmable timer		
Enamel liners		

Appliance/Built-in Dimensions (HxWxD) in mm: 594 x 595 x 567 / 590 x 560 x 550

XXL baking tray XXL meat/grill pan 50°C – 275°C

Also available: BEB351010W – White / BEB351010B – Black

BUILT-IN DOUBLE OVENS

SURROUNDCOOK® MULTIFUNCTION OVENS



SurroundCook[®] Multifunction with ProSight Touch Controls DCK731110M

KEY FEATURES

	CATA- LYTIC IV	
SurroundCook® ProSight Touch Controls	Catalytic Liners Dual Multifunction	
TOP OVEN FUNCTIONS		
(🕎 True Fan Cooking	Dizza Setting	
🐨 Turbo Grilling	(I°C) Slow Cooking	
Grilling	Defrost	
Bottom Heat		
MAIN OVEN FUNCTIONS		
Bottom Heat	Dizza Setting	
Conventional Cooking	(PC) Slow Cooking	
Defrost	🛞 True Fan Cooking	
Grilling	() Turbo Grilling	
Model Features		
Fully programmable timer	4/4 shelf positions	
White LED display	XXL baking tray	
39 ltr top oven capacity	XXL meat/grill pan	
61 ltr bottom oven capacity	Telescopic runners	
Single oven lights	30°C – 300°C	
Triple door glazing		
Energy Rating: A/A	Appliance/Built-in Dimensions (HxWxD) in mm: 888 x 594 x 568 / 875 x 560 x 550	





SurroundCook[®] Multifunction with Retractable Controls DCK431110M

KEY FEATURES

Energy Rating: A/A	Appliance/Built-in Dimensions (HxWxD) in mm: 888 x 594 x 568 / 875 x 560 x 550	
Double door glazing		
Single oven lights		
68 ltr bottom oven capacity	50°C – 275°C	
43 ltr top oven capacity	XXL meat/grill pan	
White LED display	XXL baking tray	
Fully programmable timer	4/5 shelf positions	
Model Features		
🗑 Turbo Grilling	Bottom Heat	
Moist Fan Cooking	Dizza Setting	
🛞 True Fan Cooking	🛞 Defrost	
Conventional Cooking	Grilling	
MAIN OVEN FUNCTIONS		
Top Heat		
Grilling		
💭 Fast Grilling		
Conventional Cooking	Bottom Heat	
TOP OVEN FUNCTIONS		
SurroundCook® Retractable Controls	CATA- LYTIC Solution	

BUILT-IN DOUBLE OVENS

SURROUNDCOOK® MULTIFUNCTION OVENS




DEK431010M

SurroundCook® Multifunction with Retractable Controls

SurroundCook® Multifunction with Catalytic Cleaning DCB331010M

KEY FEATURES

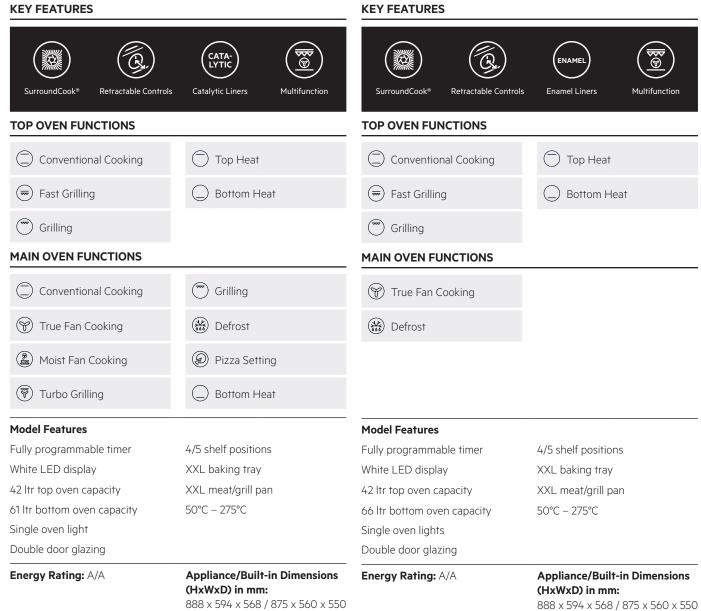



SurroundCook® Multifunction with Retractable Controls DEB331010M

KEY FEATURES

SurroundCook® Retractable Controls	Enamel Liners Multifunction
TOP OVEN FUNCTIONS	
Conventional Cooking	Top Heat
📼 Fast Grilling	Bottom Heat
C Grilling	
MAIN OVEN FUNCTIONS	
🛞 True Fan Cooking	
Defrost	

Model Features	
Fully programmable timer	4/5 shelf positions
White LED display	XXL baking tray
43 ltr top oven capacity	XXL meat/grill pan
68 ltr bottom oven capacity	50°C – 275°C
Single oven light	
Double door glazing	
Energy Rating: A/A	Appliance/Built-in Dimensions (HxWxD) in mm:
	888 x 594 x 568 / 875 x 560 x 550

Ovens

BUILT UNDER DOUBLE OVENS

SURROUNDCOOK® MULTIFUNCTION OVENS





DUK431110M

SurroundCook[®] Multifunction with Retractable Controls

SurroundCook[®] Multifunction with ProSight Touch Controls DUK731110M

KEY FEATURES		KEY FEATURES	
SurroundCook® ProSight Touch Controls	Catalytic Liners Dual Multifunction	SurroundCook® Retractable Contro	CATA- LYTIC Einers Multifunction
TOP OVEN FUNCTIONS		TOP OVEN FUNCTIONS	
🛞 True Fan Cooking	Dizza Setting	Conventional Cooking	Bottom Heat
🗑 Turbo Grilling	(Fc) Slow Cooking	💭 Fast Grilling	
Grilling	😸 Defrost	Grilling	
Bottom Heat		Top Heat	
MAIN OVEN FUNCTIONS		MAIN OVEN FUNCTIONS	
Bottom Heat	Dizza Setting	🛞 True Fan Cooking	Defrost
C Conventional Cooking	(rc) Slow Cooking	Moist Fan Cooking	
Defrost	🛞 True Fan Cooking	🗑 Turbo Grilling	
Crilling	🗑 Turbo Grilling	Grilling	
Model Features		Model Features	
Fully programmable timer	4/4 shelf positions	Fully programmable timer	4/4 shelf positions
ProSight Touch Controls	XXL baking tray	White LED display	XXL baking tray
42 ltr top oven capacity	XXL meat/grill pan	40 ltr top oven capacity	XXL meat/grill pan
45 ltr bottom oven capacity	50°C – 275°C	46 ltr bottom oven capacity	50°C – 275°C
Single oven lights		Single oven lights	
Triple door glazing		Double door glazing	
Energy Rating: A/A	Appliance/Built-in Dimensions (HxWxD) in mm: 715 x 594 x 568 / 720 x 600 x 550	Energy Rating: A/A	Appliance/Built-in Dimensions (HxWxD) in mm: 715 x 594 x 568 / 720 x 600 x 550
62			

SurroundCook[®] Multifunction with Catalytic Cleaning DUB331110M

KEY FEATURES

SurroundCook® Retractable Controls	Catalytic Liners Multifunction
TOP OVEN FUNCTIONS	
Conventional Cooking	Bottom Heat
📼 Fast Grilling	
(T) Grilling	
Top Heat	
MAIN OVEN FUNCTIONS	
🛞 True Fan Cooking	Defrost
Moist Fan Cooking	
🐨 Turbo Grilling	
Grilling	
Model Features	
Fully programmable timer	4/4 shelf positions
White LED display	XXL baking tray
40 ltr top oven capacity	XXL meat/grill pan
46 ltr bottom oven capacity	50°C – 275°C
Single oven lights	
Double door glazing	
Energy Rating: A/A	Appliance/Built-in Dimensions (HxWxD) in mm: 715 x 594 x 568 / 720 x 600 x 550

Ovens

COMPACT RANGE

With our widest range of high performance appliances, you can mix and match everything you want – the way you want – and it all aligns beautifully with a single, stylish design.

The Compact range also fits perfectly with our full size appliances.









Square Alignment Compacts

Create your ideal kitchen in a combination to suit your needs. By grouping your compact appliances in a cluster, a column or a sleek horizontal run you create your own, individual look.

Horizontal Alignment Oven and Compacts

Compact Appliance, Warming Draw or Vac sealer and an AEG Single Oven.

Horizontal Alignment Compacts

Two compact appliances with two warming drawers or vacuum sealers.

Vertical Alignment Oven and Compact Compact above an AEG single oven. However you like to create in the kitchen, we have a Compact appliance to suit your needs.

Whether you want to roast, bake, grill, microwave or cook with steam, our high performance ovens and vacuum sealer drawers ensure you can serve great tasting dishes every time.

The combination of drawers with our Compact range match those of our full-size ovens, so you don't need to compromise.

COMPACT OVENS WITH MICROWAVE



Compact Multifunction Oven with Microwave KMK861000M

KEY FEATURES

Wheel	n SurroundCook®
OVEN FUNCTIONS	
🛞 True Fan Cooking	🗭 Bread Baking
Conventional Cooking	(RATTN) Au Gratin
🐨 Turbo Grilling	Dough Proving
C Grilling	🛞 Eco Roasting
Bottom Heat	(I°C) Slow Cooking
Dizza Setting	
🛞 Defrost	
📼 Fast Grilling	
Microwave Function	
Model Features	
Fully programmable timer	30°C – 230°C
White LED display	1000W microwave
43 ltr oven capacity	
Single halogen lighting	
Quadruple door glazing	
XXL baking tray	
XXL meat/grill pan	
Energy Rating: –	Appliance/Built-in Dimensions (HxWxD) in mm: 455 x 595 x 567 / 450 x 560 x 550



Compact Multifunction Oven with Microwave KMK761000M

KEY FEATURES

OVEN FUNCTIONS Image: Solution of Cooking Image: Solution of Cooking Image: So	Energy Rating: –	Appliance/Built-in Dimensions (HxWxD) in mm: 455 x 595 x 567 / 450 x 560 x 550
Image: Second State	30°C – 230°C	
Image: State of Conventional Cooking Image: Con		
Image: Second State Image: State of Conventional Cooking Image: Conventional Cooking Image: State of Convention Image: State o		
Image: State of Conventional Cooking Image: Con		
 True Fan Cooking Conventional Cooking Conventional Cooking Au Gratin Au Gratin Dough Proving Bottom Heat Eco Roasting Eco Roasting Slow Cooking Pizza Setting Defrost Fast Grilling Microwave Function 		
True Fan CookingImage: Bread BakingConventional CookingImage: Au GratinTurbo GrillingImage: Dough ProvingGrillingImage: Betrom HeatPizza SettingImage: Slow CookingPizza SettingImage: Slow CookingFast GrillingImage: Betrom HeatImage: Bast GrillingImage: Betrom HeatImage: Bast GrillingImage: Ba		1000W microwave
 True Fan Cooking Conventional Cooking Conventional Cooking Au Gratin Au Gratin Dough Proving Conventional Bottom Heat Slow Cooking Pizza Setting Defrost Fast Grilling 	Model Features	
 True Fan Cooking Conventional Cooking Conventional Cooking Au Gratin Turbo Grilling Dough Proving Eco Roasting Eco Roasting Slow Cooking Pizza Setting Defrost 	Microwave Function	
True Fan Cooking Conventional Cooking Au Gratin Turbo Grilling Grilling Bottom Heat Pizza Setting	📼 Fast Grilling	
 True Fan Cooking Conventional Cooking Conventional Cooking Au Gratin Turbo Grilling Dough Proving Grilling Bottom Heat 	🗱 Defrost	
 True Fan Cooking Conventional Cooking Turbo Grilling Grilling Eco Roasting 	D Pizza Setting	
 True Fan Cooking Conventional Cooking Turbo Grilling Dough Proving 	Bottom Heat	(I'C) Slow Cooking
 True Fan Cooking Conventional Cooking Au Gratin 	Grilling	Eco Roasting
True Fan Cooking Bread Baking	🐨 Turbo Grilling	Dough Proving
	Conventional Cooking	(aath) Au Gratin
OVEN FUNCTIONS	True Fan Cooking	Bread Baking
	OVEN FUNCTIONS	
ProSight Microwave Multifunction SurroundCook®		



Compact Multifunction Oven with Microwave

KMK561000M

KEY FEATURES



OVEN FUNCTIONS

Energy Rating: –	Appliance/Built-in Dimensions (HxWxD) in mm:
30°C – 230°C	
XXL baking tray	
Quadruple door glazing	
Single halogen lighting	
43 ltr oven capacity	
White LED display	
Model Features Fully programmable timer	1000W microwave
Microwave Function	
💭 Fast Grilling	
Defrost	
Dizza Setting	
Bottom Heat	
Grilling	
🗑 Turbo Grilling	
Conventional Cooking	
(🖌 True Fan Cooking	


455 x 595 x 567 / 450 x 560 x 550

COMPACT MICROWAVE OVEN



Compact Microwave Oven with Grill KMK721000M

KEY FEATURES

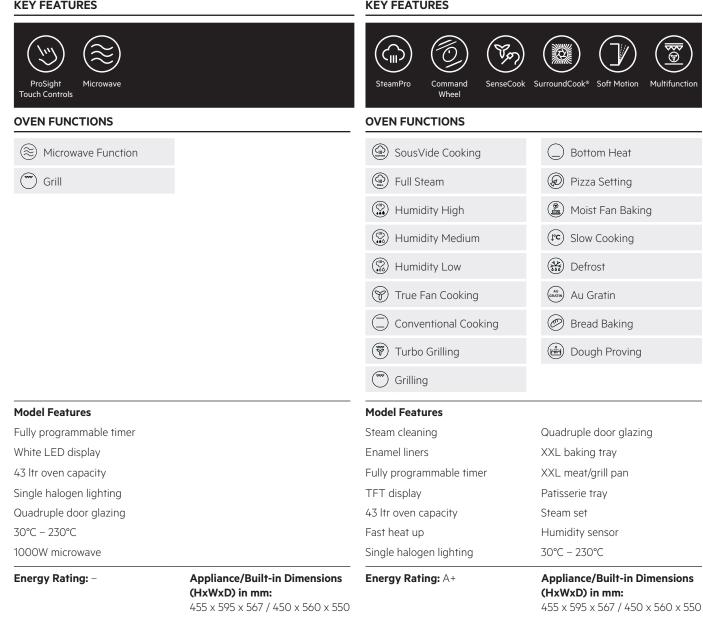

COMPACT MULTIFUNCTION OVENS



Compact SousVide Oven with Command Wheel Control KSK892220M

8

KEY FEATURES



Compact Full Steam Oven with Command Wheel Control KSK882220M


KEY FEATURES

(R) (O) (R)		
SteamBoost Command SenseCook Wheel	SurroundCook® Soft Motion Multifunction	
OVEN FUNCTIONS		
💮 Full Steam	(****) Defrost	
🛞 True Fan Cooking	(RATIN) Au Gratin	
Conventional Cooking	Bread Baking	
🐨 Turbo Grilling	Dough Proving	
Grilling	📼 Fast Grilling	
Bottom Heat	(1/4) Quarter Steam & Heat	
D Pizza Setting		
Moist Fan Baking		
(Ic Slow Cooking		
Model Features		
Steam cleaning	XXL baking tray	
Fully programmable timer	XXL meat/grill pan	
TFT display	30°C – 230°C	
43 ltr oven capacity	Steam set	
Fast heat up	Enamel liners	
Single halogen lighting		
Quadruple door glazing		
Energy Rating: A+	Appliance/Built-in Dimensions (HxWxD) in mm: 455 x 595 x 567 / 450 x 560 x 550	



Compact Full Steam and Multifunction Oven KSK782220M

KEY FEATURES

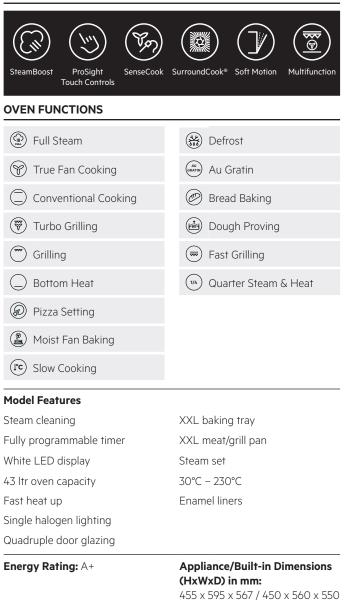

COMPACTS

COMPACT PYROLYTIC OVENS





Compact Multifunction Oven with Pyrolytic Self Cleaning KPK842220M

KEY FEATURES

Fully programmable timer XXL meat/grill pan Fully programmable timer XXL meat/grill pan TFT display 30°C – 300°C White LED display 30°C – 300°C 43 ltr oven capacity 1 quick, 1 normal and 1 intense self 43 ltr oven capacity 1 quick, 1 normal and 1 intense self Fast heat up cleaning function Fast heat up cleaning function Single halogen lighting Single halogen lighting Quadruple door glazing XXL baking tray XXL baking tray XXL baking tray	 Bottom Heat Pizza Setting Moist Fan Baking Au Gratin Model Features Fully programmable timer TFT display 30°C - 43 ltr oven capacity 1 quick cleaning Single halogen lighting Quadruple door glazing XXL baking tray	leat/grill pan 300°C x, 1 normal and 1 intense self ng function	 Moist Fan Baking Defrost Au Gratin Model Features Fully programmable timer White LED display 43 ltr oven capacity Fast heat up Single halogen lighting Quadruple door glazing XXL baking tray	30°C – 300°C 1 quick, 1 normal and 1 intense sel
Conventional Cooking Fast Grilling Turbo Grilling Slow Cooking Grilling Slow Cooking Grilling Bettom Heat Bottom Heat Pyrolysis Pizza Setting Moist Fan Baking Moist Fan Baking Moist Fan Baking Motel Features Suc C - 300°C Fully programmable timer XXL meat/grill pan TFT display 30°C - 300°C 43 ltr oven capacity 1 quick, 1 normal and 1 intense set Fast heat up Single halogen lighting Quadruple door glazing Quadruple door glazing	 Bottom Heat Bottom Heat Pizza Setting Moist Fan Baking Au Gratin Model Features Fully programmable timer TFT display A0°C - 43 ltr oven capacity Fast heat up Single halogen lighting Quadruple door glazing	heat/grill pan • 300°C «, 1 normal and 1 intense self	 Moist Fan Baking Defrost Au Gratin Model Features Fully programmable timer White LED display 43 ltr oven capacity Fast heat up Single halogen lighting Quadruple door glazing	30°C – 300°C 1 quick, 1 normal and 1 intense sel
Image: Conventional Cooking Image: Fast Grilling Image: Turbo Grilling Image: Fast Grilling	 Bottom Heat Pizza Setting Moist Fan Baking Au Gratin Model Features Fully programmable timer TFT display 30°C - 43 Itr oven capacity Fast heat up	heat/grill pan • 300°C «, 1 normal and 1 intense self	 Moist Fan Baking Defrost Au Gratin Model Features Fully programmable timer White LED display 43 Itr oven capacity Fast heat up	30°C – 300°C 1 quick, 1 normal and 1 intense sel
Image: Conventional Cooking Image: Fast Grilling Image: Fast Grilling	 Bottom Heat Pizza Setting Moist Fan Baking Au Gratin Model Features Fully programmable timer TFT display 30°C - 43 ltr oven capacity 1 quick close	heat/grill pan • 300°C «, 1 normal and 1 intense self	 Moist Fan Baking Defrost Au Gratin Model Features Fully programmable timer White LED display 43 ltr oven capacity	30°C – 300°C 1 quick, 1 normal and 1 intense sel
Image: Conventional CookingImage: Fast GrillingImage: Fast GrillingImage: Fast GrillingImage: Turbo GrillingImage: Fast GrillingImage: Fast GrillingImage: Fast GrillingImage: T	Bottom Heat Device A constraints Moist Fan Baking Au Gratin Model Features Fully programmable timer XXL m TFT display 30°C -	neat/grill pan - 300°C	 Moist Fan Baking Defrost Au Gratin Model Features Fully programmable timer White LED display	30°C – 300°C
Image: Conventional CookingImage: Fast GrillingImage: Fast GrillingImage: Turbo GrillingImage: Fast GrillingImage: Fast GrillingImage: GrillingIm	Bottom Heat Pizza Setting Moist Fan Baking Au Gratin Model Features Fully programmable timer XXL m	neat/grill pan	 Moist Fan Baking Defrost Au Gratin Model Features Fully programmable timer	
Image: Conventional CookingImage: Fast GrillingImage: Fast GrillingImage: Turbo GrillingImage: Slow CookingImage: GrillingImage: PyrolysisImage: Turbo GrillingImage: Slow CookingImage: GrillingImage: PyrolysisImage: GrillingImage: PyrolysisImage: Slow CookingImage: PyrolysisImage: GrillingImage: PyrolysisImage: PyrolysisImage: PyrolysisImage: Slow CookingImage: PyrolysisImage: PyrolysisImage: PyrolysisImage: Slow Cooking<	Bottom Heat Determined Determined		 Moist Fan Baking Defrost Au Gratin 	XXI meat/grill pan
Image: Conventional CookingImage: Fast GrillingImage: Fast GrillingImage: Turbo GrillingImage: Slow CookingImage: GrillingImage: GrillingImage: Slow CookingImage: Slow CookingImage: GrillingImage: Slow CookingImage: Slow Cooking <td>Bottom Heat Pizza Setting Moist Fan Baking Au Gratin</td> <td>Pyrolysis</td> <td> Moist Fan Baking Defrost Au Gratin </td> <td></td>	Bottom Heat Pizza Setting Moist Fan Baking Au Gratin	Pyrolysis	 Moist Fan Baking Defrost Au Gratin 	
Conventional Cooking Fast Grilling Turbo Grilling Slow Cooking Slow Cooking Grilling Grilling Betad Baking Bottom Heat Pyrolysis Pizza Setting Prolysis Moist Fan Baking Defrost	Bottom Heat Pizza Setting Moist Fan Baking	Pyrolysis	 Moist Fan Baking Defrost 	
Image: Conventional CookingImage: Fast GrillingImage: Fast GrillingImage: Turbo GrillingImage: Slow CookingImage: GrillingImage: Fast GrillingImage: GrillingImage: Slow CookingImage: Slow CookingImage: Slow CookingImage: GrillingImage: Slow CookingImage: Slow Coo	Bottom Heat	Pyrolysis	Moist Fan Baking	
Image: Conventional Cooking Image: Fast Grilling Image: Fast Grilling Image: Fast Grilling Image: Conventional Cooking Image: Fast Grilling Image: Fast Grilling Image: Fast Grilling Image: Conventional Cooking Image: Slow Cooking Image: Grilling Image: Fast Grilling Image: Conventional Cooking Image: Slow Cooking Image: Grilling Image: Fast Grilling Image: Conventional Cooking Image: Slow Cooking Image: Grilling Image: Fast Grilling Image: Conventional Cooking Image: Slow Cooking Image: Grilling Image: Fast Grilling Image: Conventional Cooking Image: Slow Cooking Image: Grilling Image: Fast Grilling Image: Conventional Cooking Image: Slow Cooking Image: Grilling Image: Fast Grilling Image: Conventional Cooking Image: Slow Cooking Image: Grilling Image: Fast Grilling Image: Conventional Cooking Image: Slow Cooking Image: Slow Cooking Image: Slow Cooking Image: Slow Cooking Image: Conventional Cooking Image: Slow Cooking Image: Slow Cooking Image: Slow Cooking Image: Slow Cooking Image: Conventional Cooking Image: Slow Cooking Image: Slow Cooking Image: Slo	Bottom Heat	Pyrolysis		
Image: Conventional Cooking Image: Fast Grilling Image: Fast Grilling Image: Fast Grilling Image: Conventional Cooking Image: Fast Grilling Image: Fast Grilling Image: Fast Grilling Image: Conventional Cooking Image: Slow Cooking Image: Grilling Image: Fast Grilling Image: Conventional Cooking Image: Slow Cooking Image: Grilling Image: Fast Grilling Image: Conventional Cooking Image: Slow Cooking Image: Grilling Image: Fast Grilling Image: Conventional Cooking Image: Slow Cooking Image: Grilling Image: Fast Grilling Image: Conventional Cooking Image: Slow Cooking Image: Grilling Image: Fast Grilling Image: Conventional Cooking Image: Slow Cooking Image: Grilling Image: Fast Grilling Image: Conventional Cooking Image: Slow Cooking Image: Grilling Image: Fast Grilling Image: Conventional Cooking Image: Slow Cooking Image: Grilling Image: Fast Grilling Image: Conventional Cooking Image: Slow Cooking Image: Grilling Image: Fast Grilling Image: Conventional Cooking Image: Slow Cooking Image: Grilling Image: Fast Grilling Image: Conventional Cooking				
Image: Conventional Cooking Image: Fast Grilling Image: Fast Grilling Image: Fast Grilling Image: Turbo Grilling Image: Slow Cooking Image: Grilling Image: Fast Grilling Image: Turbo Grilling Image: Slow Cooking Image: Grilling Image: Fast Grilling	(^m) Grilling (<i>D</i>)	Bread Baking	Bottom Heat	
○ Conventional Cooking ○ Fast Grilling ○ Turbo Grilling ○ Fast Grilling				(PYRO-) Pyrolysis
		-		
Full Steam Dough Proving Dough Proving Dough Proving	• • •			

Compact Multifunction Oven with Pyrolytic Self Cleaning KPK742220M

KEY FEATURES

COFFEE MACHINES





Coffee Machine with Command Wheel Control KKK994500M

KEY FEATURES

FUNCTIONS

\bigcirc		AUTO		
Command	Authentic	Fully	Uses Fresh	
Wheel	Italian Coffee	Automatic	Coffee Beans	

Latte Macchiato Espresso Long Coffee Cappuccino Cappuccino Plus Warm Milk Caffè Latte Ristretto Caffè Macchiato Steamer Jug Function Espresso Lungo Espresso Macchiato Two Cups Flat White Tea Water **Model Features** Coffee jug 2.4 ltr water tank Thermal milk container 400 gr grinder capacity Descaler Quadruple LED lighting Cleaning brush Coffee powder spoon Telescopic runners + soft closing Water softener Appliance/Built-in Dimensions Energy Rating: -

(HxWxD) in mm: 455 x 595 x 361 / 450 x 560 x 550



Coffee Machine with Touch Control KKK884500M

KEY FEATURES



FUNCTIONS

Fc	pres	50
ES	pies	50

Cappuccino

Tea Water

Two Cups

Jug Function

Steamer

Model Features Coffee jug Milk container Descaler 1.8 ltr water tank 200 gr grinder capacity Dual LED lighting

Energy Rating: -

Appliance/Built-in Dimensions (HxWxD) in mm: 455 x 595 x 567 / 450 x 560 x 550

COMPACTS

WARMING DRAWERS



TWO YEA


29cm Warming Drawer KDK912924M

KEY FEATURES

_	

€ 29 CM	12 PLACE	30- 80°C
29cm	12 Place Settings	30–80°C Temp Range

FUNCTIONS	
Cups and Glass Warming (45°C)	Dough Proving (30°C)
Plate Warming (60°C)	Keep warm (70°C)
Food Reheating (60°C – 80°C Max)	Defrosting (30°C Max)
Model Features	
Variable temperature control	Rotary control knob
On/off LED	Heating element
Anti-slip mat	Fan air circulation



29cm Warming Drawer

KDE912924M

FUNCTIONS

Cups and Glass Warming (45°C)
Plate Warming (60°C)

Food Reheating (60°C – 80°C Max) Defrosting (30°C Max)

Model Features

Variable temperature control On/off LED Anti-slip mat Rotary control knob Heating element Fan air circulation

Dough Proving (30°C)

Keep warm (70°C)



14cm Warming Drawer KDK911424M

KEY FEATURES

* 14 CM *	6 PLACE	30- 80°C	
14cm	6 Place Settings	30–80°C Temp Range	

FUNCTIONS

Anti-slip mat

Cups and Glass Warming (45°C)	Dough Proving (30°C)
Plate Warming (60°C)	Keep warm (70°C)
Food Reheating (60°C – 80°C Max)	Defrosting (30°C Max)
Model Features	
Variable temperature control	Rotary control knob
On/off LED	Heating element

Fan air circulation

Appliance Dimensions	Built-in Dimensions	Applia
(HxWxD) in mm:	(HxWxD) in mm:	(HxWx
295 x 595 x 535	295 x 560 x 550	295 x 5

ppliance Dimensions (xWxD) in mm: 5 × 595 × 535

Built-in Dimensions (HxWxD) in mm: 295 × 560 × 550
 Appliance Dimensions
 Built-in Dimensions


 (HxWxD) in mm:
 (HxWxD) in mm:

 140 x 595 x 535
 141 x 560 x 550



14cm Warming Drawer KDE911424M

KEY FEATURES



FUNCTIONS

Cups and Glass Warming (45°C)

Plate Warming (60°C)

Food Reheating (60°C – 80°C Max)

Model Features

Variable temperature control On/off LED Anti-slip mat Dough Proving (30°C)

Keep warm (70°C)

Defrosting (30°C Max)

Rotary control knob Heating element Fan air circulation

Appliance Dimensions (HxWxD) in mm: 140 × 595 × 535 **Built-in Dimensions** (HxWxD) in mm: 141 × 560 × 550

COMPACTS

SOUSVIDE VACUUM SEALERS





14cm Vacuum Sealer

KDE911423M

KEY FEATURES

14cm Vacuum Sealer

KDK911423M


KEY FEATURES

Touch Control White LEDs 3 Vacuum Settings		Touch Control White LEDs 3 Vacuum Settings	
FUNCTIONS		FUNCTIONS	
Marinating/Infusion	Min. Vacuum Setting	Marinating/Infusion	Min. Vacuum Setting
Max. Vacuum Setting	Sealing Time Displayed	Max. Vacuum Setting	Sealing Time Displayed
Med. Vacuum Setting		Med. Vacuum Setting	
Appliance Dimensions (HxWxD) in mm: 131 x 595 x 510	Built-in Dimensions (HxWxD) in mm: 139 x 560 x 550	Appliance Dimensions (HxWxD) in mm: 131 x 595 x 510	Built-in Dimensions (HxWxD) in mm: 139 x 560 x 550

MICROWAVE OVENS

AEG microwave ovens are fully built-in with a design alignment with our ovens. They have an intuitive touchscreen control panel that features a simple wipeclean surface. The touch sensitive panel lets you change functions and timings in seconds too.

All AEG microwave ovens can be installed in all cabinetry, whether non-ventilated or ventilated kitchen cabinets, making them perfect for kitchen upgrades or replacements.

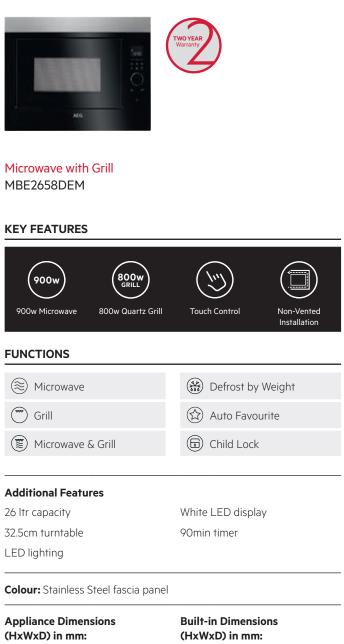

459 x 596 x 404

450 x 562 x 500

MICROWAVE OVENS



Solo Microwave MBE2658SEM

KEY FEATURES

_	
(900w)	



FUNCTIONS

🛞 Microwave

Defrost by Weight

岔 Auto Favourite

Additional	Features

26 ltr capacity

32.5cm turntable

LED lighting

Colour: Stainless Steel fascia panel


Appliance Dimensions (HxWxD) in mm: 459 × 596 × 404 **Built-in Dimensio (HxWxD) in mm:** 450 x 562 x 500



Microwave with Grill MBB1756DEM

KEY FEATURES

371 x 594 x 316

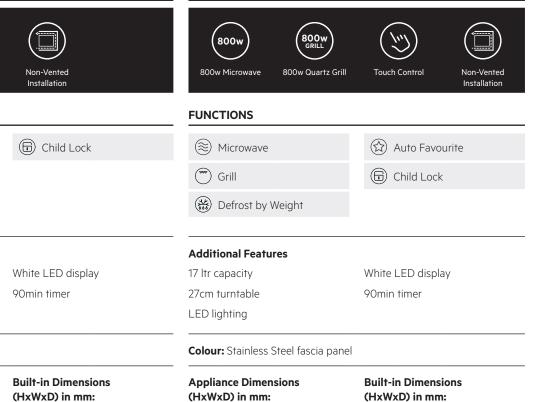

360 x 562 x 300

Are the second sec

Solo Microwave MBB1756SEM

KEY FEATURES

371 x 594 x 316

800w			
800w Microwave	Touch Control	Non-Vented Installation	
FUNCTIONS			
🛞 Microwave		Child Lock	
Defrost by We	ight		
🛱 Auto Favourite	5		
Additional Features	5		
17 ltr Capacity		White LED display	
27cm turntable		90min timer	
LED lighting			
Colour: Stainless Ste	el fascia pane		
Appliance Dimensio (HxWxD) in mm:	ons	Built-in Dimensions (HxWxD) in mm:	

(HxWxD) in mm 360 x 562 x 300

76



Solo Microwave MBB1755SEM

KEY FEATURES

800w Kicrowave Touch Control	Non-Vented
	Installation
FUNCTIONS	
🛞 Microwave	Child Lock
😸 Defrost by Weight	
🛱 Auto Favourite	
Additional Features	
17 ltr capacity	White LED display
27cm turntable	90min timer
LED lighting	
Colour: Stainless Steel fascia pane	4
Appliance Dimensions	Built-in Dimensions

(HxWxD) in mm: 371 x494 x 316

Built-in Dimensions (HxWxD) in mm: 360 x 462 x 300

77

INTRODUCING THE AEG BLACKLINE RANGE






BLACKLINE RANGE



SousVide BlackLine Multifunction Oven BSE792320B

KEY FEATURES

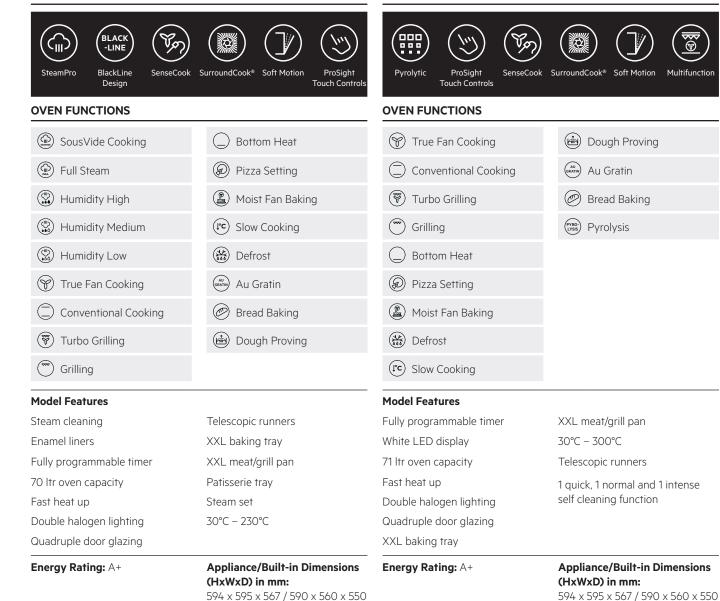




Pyrolytic Self Cleaning Multifunction Oven BPK742320B

<u></u>

Multifunctio

KEY FEATURES

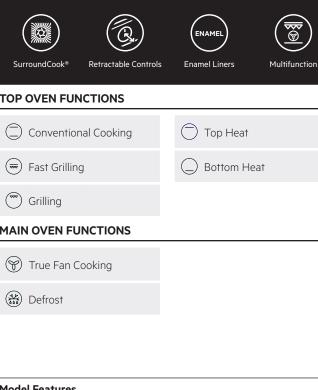

SurroundCook® Multifunction with Retractable Controls

DEE431010B

KEY FEATURES

		(1) (2) (2) (3)	
SurroundCook® Retractable Controls	Enamel Liners Multifunction	ProSight Microwave BlackLine Touch Controls Design	Multifunction SurroundCook®
TOP OVEN FUNCTIONS		OVEN FUNCTIONS	
Conventional Cooking	Top Heat	True Fan Cooking	Bread Baking
💭 Fast Grilling	Bottom Heat	Conventional Cooking	(GEATIN) Au Gratin
	-	🐨 Turbo Grilling	Dough Proving
(T) Grilling		Grilling	🛞 Eco Roasting
MAIN OVEN FUNCTIONS		Bottom Heat	(rc) Slow Cooking
🏈 True Fan Cooking		Dizza Setting	
🗱 Defrost		😸 Defrost	
		📼 Fast Grilling	
		Microwave Function	
Model Features		Model Features	
Fully programmable timer	XXL baking tray	Fully programmable timer	
White LED display	XXL meat/grill pan	White LED display	
43 ltr top oven capacity	50°C – 275°C	43 ltr oven capacity	
68 ltr bottom oven capacity		Single halogen lighting	
Single oven lights		Quadruple door glazing	
Double door glazing		XXL baking tray	
4/5 shelves		30°C – 230°C	
Energy Rating: A/A	Appliance/Built-in Dimensions (HxWxD) in mm: 888 x 594 x 568 / 875 x 560 x 550	Energy Rating: –	Appliance/Built-in Dimensions (HxWxD) in mm: 455 x 595 x 567 / 450 x 560 x 550





Compact BlackLine Multifunction Oven with Microwave KME761000B

KEY FEATURES

BLACKLINE RANGE







KEY FEATURES

Milk container

1.8 ltr water tank200 gr grinder capacity

Dual LED lighting

Descaler

ProSight Authentic Fully Touch Controls Italian Coffee	Uses Fresh BlackLine
FUNCTIONS	
Espresso	Two Cups
Cappuccino	Jug Function
Tea Water	Steamer
Model Features	
Coffee jug	

▲ 14 CM ↓ 14cm	6 PLACE 6 Place Settings	30- 80°C 30-80°C Temp Range	
	IS		
Cups and G	lass Warmi	ng (40°C)	Food Warming (80°C Max)
Plate Warm	ning (60°C)		Defrosting (30°C Max)

Model	Features	

Variable temperature control On/off LED Anti-slip mat

14cm Warming Drawer

KDE911424B

KEY FEATURES

Rotary control knob Heating element Fan air circulation



14cm Vacuum Sealer KDE911423B KEY FEATURES

ProSight White LEDs 3 V	acuum ttings
FUNCTIONS	
Marinating/Infusion	Min. Vacuum Setting
Max. Vacuum Setting	Sealing Time Displayed
Med. Vacuum Setting	

Energy Rating: –	Appliance/Built-in Dimensions	Appliance Dimensions	Built-in Dimensions	Appliance Dimensions	Built-in Dimensions
	(HxWxD) in mm:	(HxWxD) in mm:	(HxWxD) in mm:	(HxWxD) in mm:	(HxWxD) in mm:
	455 x 595 x 361 / 450 x 560 x 550	131 x 595 x 500	139 x 560 x 550	131 x 595 x 510	139 x 560 x 550





Solo Microwave MBE2658SEB

KEY FEATURES

900w Microwave	
FUNCTIONS	
🛞 Microwave	Child Lock
😸 Defrost by Weight	
😥 Auto Favourite	
Model Features	
26 ltr capacity	White LED display
32.5cm turntable	90min timer
LED lighting	

Colour: Stainless Steel fascia panel

Appliance Dimensions	Built-in Dimensions
(HxWxD) in mm:	(HxWxD) in mm:
459 x 596 x 404	450 x 562 x 500

At AEG we believe that a hob should look as good as it performs. Which is why all our induction hobs are designed not just to bring out the best in your cooking, but also to give you the flexibility you need while cooking and to look fantastic in your kitchen.

IN THIS SECTION

Induction Hobs	92–104
Combo Hobs	105
Ceramic Hobs	106–108
Gas Hobs	110–123
Mixed Fuel Hobs	124
CrystalLine	125–127




TAKE THE GUESSWORK OUT OF COOKING.



SensePro®

The most advanced induction hob with sensor technology, equipped with the world's first wireless Food Sensor enables you to cook with accuracy on your hob. That same accuracy also allows you to SousVide cook on your hob.













Pure Black Design

Aligns perfectly with every kitchen style to match the clean design of your kitchen. This hob has a unique, pure black surface – with absolutely no markings apart from a subtle on/off button.



Hob²Hood

The AEG Hob²Hood adapts to your cooking to keep your kitchen free of steam and vapours automatically.



Slim Installation

The slim, space-saving design embeds into a work surface of any depth, even with a drawer below.

PLACE IT WHEREVER YOU WANT.

The ComboHob combines an induction hob and an integrated hood into one single product. So you can place the hob wherever you want without having to install a hood above it, giving you many creative options for individual kitchen design.









Easy Installation

Our Optifix[™] spring system is self-installing and self centering. Simply place the hob into your cut out for it to secure into place.



Easy Cleaning and Maintenance

The circular grid in the centre of the hob can be rotated and removed. Meaning ease of access for cleaning the aluminium grease filter and the effortless maintenance of the high-efficiency odour filter inside. Ensuring ongoing, pristine performance.



DirekTouch Slider

This hob's direct-access heat controls enable you to switch directly to exactly the right temperature with one touch. Simply touch the correct level on the slide control.

A GUIDE TO HOB ICONS

KEY FEATURES



The user interface is not visible until a pan is placed on the hob. The user interface contains DirekTouch for instant heat control with one touch, minute minder and auto bridge.



Use the intelligent touchscreen on the SenseFry® induction hob to select the food and desired result. Rare, medium or well-done.



Touch Control

Efficient touch controls enable you to set the hob's heat level precisely, while its flat surface is easy to clean.



the settings accordingly.

A single, full colour touchscreen provides complete control over the hob. Monitor live feedback for each zone and adjust

5.8 14 い **DirekTouch Slider**

This hob's direct-access heat controls enable you to switch directly to exactly the right temperature with one touch. Simply touch the correct level on the slide control.



A special sensor under the glass monitors the cooking activity in the pot and automatically reduces to a simmer level when it starts boiling.



The most advanced induction hob with sensor technology, equipped with a wireless food probe that enables precision cooking.



Classic rotary control knobs.

MaxiSense®

The MaxiSense® induction hob has self-sizing cooking zones. Each zone detects the size and shape of the pan you're using, however large or small.

FlexiBridge

A multi-purpose zone that allows you to customize your own cooking area, combining up to 4 segments with a consistent and even heat distribution.



Two zones can be paired at the touch of a button, providing a single bridge for cooking. It's optimised for using large pots and pans by automatically aligning to share both temperature and time settings.



From boiling to simmering to keeping warm. When you need repeated quick heat changes to create a dish, simply slide your pan from heat to heat.



Hob²Hood automatically turns on your cooker hood and lights when you start using the hob. The cooker hood will adjust according to the cooking levels on the induction zones.



Unique hob with pure black design. The hob controls and cooking zones are visible only when needed. When not in use, the surface is clean black, nothing to disturb the kitchen design.




Cast iron pan supports provide a robust and durable cooking support with professional design. Safe, long lasting and easy to clean.

Extendable Zone

Extendable zone, optimised for cooking with a wide range of pot sizes.



Slim Installation





Our Optifix[™] spring system is self-installing and self-centering. Simply place the hob into your cut out.

KEY FEATURES



Because the surface around the pans stays cool as you cook, you can get rid of spills as you go along. Nothing gets burnt on and there's nowhere for dirt to hide.



Perfect cooking results guaranteed by setting the cooking time length and the acoustic signal lets you know it has finished.

Auto Ignition

Total control of the ignition through a single-handed operation of turning the knob to automatically light the hob.



Flush Burner

Flush Burners are easy to remove and dishwasher safe, ensuring that cleaning the hob is as simple as possible.



Vertical Flame Vertical Flame ensures the heat is

evenly distributed on the bottom of the pan, making it 20% more efficient than standard burners.



Two zones can be paired at the touch of a button, providing a single bridge for cooking. By automatically aligning to share both temperature and time settings, it's optimised for using large pots and pans at once.

FUNCTIONS



An innovative assisted cooking function. Select the dish and the desired result – rare, medium, well-done - to ensure consistent frying.



Set a reminder or use the count-up timer to keep in control of your cooking.



Each induction cooking zone has an independent 99 minute timer. The timer will switch the zone off after the time has elapsed.



Energy saving timer that switches off the zone and uses residual heat to complete the last few minutes of cooking.



Power booster function to reach high temperatures extra fast.



The hob will apply full output of heat at the beginning, before automatically dropping to the required setting.



Cook to perfection with SousVide, a professional approach to cooking. Applies low temperature and stable temperature to vacuum packed food.



The user interface is not visible until a pan is placed on the hob.



Safety mechanism that turns off the hob after a given time, depending on the selected heat setting.



A gentle melting function, perfect for chocolate or butter.



Number of burners.



Wok Burner

Extra large burner designed for a large wok.



A function that reduces all zones in operation to a 'keep warm' setting.



Triple extendable zone, optimized for cooking with a wide range of pot sizes.

The SensePro[®] Induction Hob delivers accurate and consistent cooking results every time.

It uses an integrated intelligent touchscreen, allowing you to select the food and desired level of cooking.

The wireless food probe accurately measures temperatures at a 1° interval, allowing you to SousVide cook on the hob.

SousVide Cooking

An old cooking technology which is used by professional chefs to cook vacuum packed food slowly at a low, very accurately controlled temperature.

SousVide allows you to create tastier and healthier dishes. Cook with absolute purity, sealing in all aromas, taste and nutrients under vacuum.



INDUCTION HOBS



80cm SensePro® Hob IAE84881FB

KEY FEATURES



FUNCTIONS

Cook Assist	Stop & Go
🕐 Count Up Timer	(b) Auto Off
D Minute Minder	(MELT-) Melting
D Eco Timer	SenseFry® assistance
ZONE Zone Booster	SousVide

Additional Features

Residual heat indicators Child lock Red LEDs Bevelled 4 sides Electricity loading 7350W Food probe

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 44 × 810 × 520 **Built-in Dimensions** (HxW) in mm: 780 × 490



80cm SenseFry[®] Hob IAE84851FB

KEY FEATURES



FUNCTIONS

Cook Assist	Stop & Go
O Count Up Timer	(b) Auto Off
Minute Minder	(MELT) Melting
Eco Timer	(a) Hob ² Hood
Zone Booster	

Additional Features Residual heat indicators

Child lock Red LEDs Bevelled 4 sides Electricity loading 7350W


Energy Rating: N/A	
Appliance Dimensions	Built-in Dimensions
(HxWxD) in mm:	(HxW) in mm:



80cm ActiveTouch Hob

IKE85651FB

KEY FEATURES



FUNCTIONS



Additional Features

Residual heat indicators Child lock Red and White LEDs Bevelled 4 sides Electricity loading 7350W

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 44 x 810 x 520

INDUCTION HOBS







80cm PURE1 Induction Hob

IPE84531FB

KEY FEATURES

80cm PURE2 Induction Hob IPE84571FB

KEY FEATURES



FUNCTIONS

(R) AutoMax	Zone Booster
() Count Up Timer	Stop & Go
D Minute Minder	(d) Auto Off
🛞 Eco Timer	

Additional Features

Residual heat indicators Child lock Red LEDs

Energy Rating: N/A

(HxWxD) in mm:

44 x 780 x 520

Appliance Dimensions

Bevelled 4 sides Electricity loading 7400W

Built-in Dimensions

(HxW) in mm:

750 x 490

$(\bigcirc$ + + Rotary DirekTouch Pure Black Design Single Bridge MaxiSense® Hob²Hood FUNCTIONS

(A) AutoMax	CONE Zone Booster
Detection	(TOP) Stop & Go
() Count Up Timer	(b) Auto Off
D Minute Minder	
🛞 Eco Timer	

Additional Features Residual heat indicators

Child lock

Red LEDs

Bevelled 4 sides Electricity loading 7400W

Energy Rating: N/A **Appliance Dimensions**

(HxWxD) in mm: 44 x 780 x 520

Built-in Dimensions (HxW) in mm: 750 x 490



80cm MaxiSense® Induction Hob IKE84471FB

KEY FEATURES



FUNCTIONS (R) AutoMax Zone Booster (D) Count Up Timer Stop & Go Minute Minder 💩 Auto Off 🕀 Eco Timer

Additional Features	
Residual heat indicators	Bevelled 4 sides
Child lock	Electricity loading 7350W
Red LEDs	

Energy Rating: N/A	
Appliance Dimensions	Built-in Dimensions
(HxWxD) in mm:	(HxW) in mm:
	(11/1/1/11/11/11

94	



80cm MaxiSense® Induction Hob

IKE85431FB

KEY FEATURES



FUNCTIONS

(R) AutoMax	(2004) Zone Booster
() Count Up Timer	Stop & Go
Minute Minder	(d) Auto Off
🗐 Eco Timer	

Additional Features

Residual heat indicators Child lock Red LEDs

Bevelled 4 sides Electricity loading 7350W

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 44 x 780 x 520

INDUCTION HOBS







80cm MaxiSense® Induction Hob

 $(\frac{\mathbf{v}}{\mathbf{v}})$

Installatio

â

Hob²Hood

MaxiSense®

(TOP) Stop & Go

🕲 Auto Off

IKE84441FB

DirekTouch Slider

FUNCTIONS

🕀 Eco Timer

KEY FEATURES



 \bigcirc

Single Bridge



80cm MaxiSense® Induction Hob IKB84401FB

KEY FEATURES



FUNCTIONS

(A) AutoMax	EXAMPLE TO A CONTRACT TO A CON
() Count Up Timer	Stop & Go
Minute Minder	(b) Auto Off
🕘 Eco Timer	

Additional Features	
Residual heat indicators	Bevelled 4 sides
Child lock	Electricity loading 7350W
Red LEDs	

Energy Rating: N/A	
Appliance Dimensions	Built-in Dimensions
(HxWxD) in mm:	(HxW) in mm:

80cm SensePro[®] Induction Hob IAE84411FB

KEY FEATURES



FUNCTIONS

(A) AutoMax	ZONE Zone Booster
() Count Up Timer	Stop & Go
Minute Minder	(b) Auto Off
🗐 Eco Timer	

(R) AutoMax ZONE BOOSTER Zone Booster (D) Count Up Timer Minute Minder

Additional Features

Residual heat indicators Child lock Red LEDs

Energy Rating: N/A

(HxWxD) in mm:

44 x 780 x 520

Appliance Dimensions

Bevelled 4 sides Electricity loading 7350W

Built-in Dimensions

(HxW) in mm:

750 x 490

Additional Features Residual heat indicators Child lock Red and White LEDs

Bevelled 4 sides Electricity loading 7350W

Energy Rating: N/A **Appliance Dimensions**

(HxWxD) in mm: 44 x 780 x 520

Built-in Dimensions (HxW) in mm: 750 x 490

96	



70cm MaxiSense® Induction Hob

IKE74451FB

KEY FEATURES



FUNCTIONS



Additional Features

Residual heat indicators Child lock Red LEDs

Bevelled 4 sides Electricity loading 7350W

Energy Rating: N/A


Appliance Dimensions (HxWxD) in mm: 44 x 710 x 520

Built-in Dimensions (HxW) in mm: 680 x 490

Also available: IKE74451XB – Steel frame **Dimensions (HxWxD) in mm:** 46 x 696 x 516 Built-in Dimensions (HxW) in mm: 680 x 490

INDUCTION HOBS





60cm SenseFry® Hob

IAE64850FB

KEY FEATURES

60cm SensePro[®] Hob IAE64881FB

KEY FEATURES



FUNCTIONS

🙆 Cook Assist	Stop & Go
() Count Up Timer	💩 Auto Off
Minute Minder	(MELT) Melting
Eco Timer	SenseFry® assistance
Zone Booster	

Additional Features

- Residual heat indicators Child lock Red LEDs
- Bevelled 4 sides Electricity loading 7350W Food probe

$(\frac{\mathbf{v}}{\mathbf{v}})$



FUNCTIONS

🙆 Cook Assist	Stop & Go
(D) Count Up Timer	(b) Auto Off
D Minute Minder	(MELT-) Melting
🛞 Eco Timer	
Zone Booster	

Additional Features

Child lock

Red LEDs

Residual heat indicators

Bevelled 4 sides Electricity loading 7350W


 (\mathbf{T})

PowerSlide

Energy Rating: N/A **Appliance Dimensions**

(HxWxD) in mm: 44 x 590 x 520

Built-in Dimensions (HxW) in mm: 560 x 490



60cm ActiveTouch Hob IKE64651FB

KEY FEATURES



FUNCTIONS

Pan Detection	(THE STOP & GO	
Count Up Timer	(b) Auto Off	
Minute Minder		
Eco Timer		
Zone Booster		

Additional Features

Residual heat indicators Child lock Red and White LEDs


Bevelled 4 sides Electricity loading 7350W

Energy Rating: N/A	
Appliance Dimensions	Built-in Dimensions
(HxWxD) in mm:	(HxW) in mm:
44 x 590 x 520	560 x 490

Appliance Dimensions (HxWxD) in mm: 44 x 810 x 520

Energy Rating: N/A

Built-in Dimensions (HxW) in mm: 780 x 490



60cm PURE2 Induction Hob

IPE64571FB

KEY FEATURES



FUNCTIONS



Additional Features

Residual heat indicators Child lock

Red LEDs Electricity loading 7350W

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 44 x 620 x 520

INDUCTION HOBS







60cm MaxiSense® Induction Hob

*

Installatio

Hob²Hood

(+ +)

MaxiSense®

IKE64471FB

DirekToucł Slider

KEY FEATURES

60cm PURE1 Induction Hob IPE64551FB

KEY FEATURES



FUNCTIONS

(R) AutoMax	CONE Zone Booster
O Count Up Timer	(****) Stop & Go
D Minute Minder	(b) Auto Off
🐑 Eco Timer	

FUNCTIONS	
(A) AutoMax	ZONE BOOSTER
() Count Up Timer	(STOP + GO

Minute Minder
 Eco Timer

Additional Features

Residual heat indicators Child lock Red LEDs

Bevelled 4 sides
Electricity loading 7400W

Additional Features Residual heat indicators Child lock

Red LEDs

Bevelled 4 sides Electricity loading 7350W

FlexiBridge

Zone Booster

Stop & Go

🕲 Auto Off

 (\mathbf{H})

PowerSlide



(HxWxD) in mm: 44 x 590 x 520 **Built-in Dimensions** (HxW) in mm: 560 x 490



60cm MaxiSense® Induction Hob IKE64450XB

KEY FEATURES

		\bigcirc	$\begin{pmatrix} * & * \\ * & * \end{pmatrix}$
DirekTouch Slider	Slim Installation	Double Bridge	MaxiSense [®]

FUNCTIONS

(A) AutoMax	CONTENT Zone Booster
💮 Count Up Timer	(TOP) Stop & Go
Minute Minder	(b) Auto Off
Eco Timer	

Additional Features	
Residual heat indicators	Steel frame
Child lock	Electricity loading 7350W
Red LEDs	

Energy Rating: N/A	
Appliance Dimensions	Built-in Dimensions
(HxWxD) in mm:	(HxW) in mm:
46 x 576 x 516	560 x 490

Also available: IKE64450FB – Bevelled Dimensions (HxWxD) in mm: 46 x 590 x 520 Built-in Dimensions (HxW) in mm: 560 x 490

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: $44 \times 590 \times 520$ **Built-in Dimensions** (HxW) in mm: 560 x 490

imensions mm: **Built-in D** (HxW) in 560 x 490





60cm SenseBoil® Induction Hob

IAE64411FB

KEY FEATURES



FUNCTIONS



Additional Features

Residual heat indicators Child lock Red LEDs Bevelled 4 sides Electricity loading 7350W

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 44 × 590 × 520

INDUCTION HOBS






60cm MaxiSense® Induction Hob IKE64441FB

KEY FEATURES



FUNCTIONS

(A) AutoMax	CONFER Zone Booster
💮 Count Up Timer	Stop & Go
D Minute Minder	(b) Auto Off
Eco Timer	



60cm Induction Hob

IKB64401FB

FUNCTIONS

R) AutoMax	CONTER Zone Booster
D Count Up Timer	(stop & Go
D Minute Minder	(b) Auto Off
D Eco Timer	

Additional Features

Energy Rating: N/A

(HxWxD) in mm:

44 x 590 x 520

Appliance Dimensions

Residual heat indicators Child lock Red LEDs

Bevelled 4 sides Electricity loading 7350W

Built-in Dimensions

(HxW) in mm:

560 x 490

Additional Features Residual heat indicators Child lock Red LEDs

Bevelled 4 sides Electricity loading 7350W

Energy Rating: N/A	
Appliance Dimensions	Built-in Dimensions
(HxWxD) in mm:	(HxW) in mm:
44 x 590 x 520	560 x 490

Also available: IKB64401XB – Steel frame Dimensions (HxWxD) in mm: 46 x 576 x 516 Built-in Dimensions (HxW) in mm: 560 x 490



60cm Plug and Play Induction Hob HK604200IB

KEY FEATURES



FUNCTIONS

Zone Booster

💩 Auto Off

Additional Features	
Residual heat indicators	Frameless
Child lock	13 amp plug
Red LEDs	

Energy Rating: N/A	
Appliance Dimensions	Built-in Dimensions
(HxWxD) in mm:	(HxW) in mm:
60 x 590 x 520	560 x 490



90cm MaxiSense® Induction Hob

IKE95471FB

KEY FEATURES



FUNCTIONS



Additional Features

Residual heat indicators Child lock Red LEDs Bevelled 4 sides Electricity loading 7350W

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 44 × 910 × 520


INDUCTION HOBS





90cm MaxiSense® Slim Depth Hob IKK93431FB

KEY FEATURES



FUNCTIONS

(A) AutoMax	CONE Zone Booster
() Count Up Timer	(****) Stop & Go
D Minute Minder	(b) Auto Off
🗩 Eco Timer	

Additional Features

Residual heat indicators	
Child lock	
Red LEDs	

Bevelled 4 sides Electricity loading 6900W

Energy Rating: N/A

Appliance Dimensions			
(HxWxD) in mm:			
44 x 910 x 410			

Built-in Dimensions (HxW) in mm: 880 × 380

COMBO HOBS



80cm Hob Hood Integrated Hob

IDK84451IB - Recirculation model IDK84452IB - External ducted model **KEY FEATURES**

	$(\stackrel{\uparrow}{} \stackrel{\downarrow}{})$	Edean		\bigcirc	$\begin{pmatrix} * & * \\ * & * \end{pmatrix}$
DirekTouch Slider	Easy Installation	Easy Clean	Hob ² Hood	Dual Bridge	MaxiSense®

FUNCTIONS

AutoMax	(b) Auto Off
🕑 Count Up Timer	Recordence Zone Booster
D Minute Minder	
Eco Timer	
Stop & Go	

Additional Features

Residual heat indicators Child lock Red LEDs Electricity loading 7400W Recirculation max 400 m3/h Recirculation intensive 420 m3/h Max noise 71dB(A)

Energy Rating: A+


Appliance Dimensions (HxWxD) in mm:			
210 x 830 x 510			

Built-in Dimensions (HxW) in mm: 805 x 490






80cm Hob Hood Integrated Hob IDE84241IB - Recirculation model IDE84242IB - External ducted model KEY FEATURES



FUNCTIONS



Additional Features

Residual heat indicators Child lock Red LEDs Electricity loading 7400W Recirculation max 400 m3/h Recirculation intensive 420 m3/h Max noise 71dB(A)

Energy Rating: $\ensuremath{\mathbb{A}^+}$

Appliance Dimensions (HxWxD) in mm: 210 × 830 × 510

CERAMIC HOBS







TWO YEAR Warranty

70cm Ceramic Hob HK764070FB

KEY FEATURES



FUNCTIONS (R) AutoMax (stop & Go 💩 Auto Off (D) Count Up Timer ① Minute Minder 🕀 Eco Timer

Additional Features	
Residual heat indicators	Bevelled 4 sides
Child lock	Electricity loading 7500W
Red LEDs	

Energy Rating: N/A	
Appliance Dimensions	Built-in Dimensions
(HxWxD) in mm:	(HxW) in mm:

90cm Ceramic Hob HK955070FB

KEY FEATURES



FUNCTI

(A) Au Stop & Go 🕐 Co Auto Off 🕛 Minu

🕀 Eco

IONS	
	_
utoMax	(STOP + GO
ount Up Timer	6
in the NAIn day	

nt Up Timer	6
ute Minder	
Timer	

(A) AutoMax
() Count Up Timer
Minute Minder
Eco Timer

 \bigcirc

TripleZone

EXTEND-ABLE

Extendable Zone

80cm Ceramic Hob

HK854080FB

KEY FEATURES

DirekTouch Slider

FUNCTIONS

Additional	Features
Additional	i curares

Residual heat indicators Child lock Red LEDs

Energy Rating: N/A

(HxWxD) in mm:

50 x 910 x 520

Appliance Dimensions

Bevelled 4 sides Electricity loading 7900W

Built-in Dimensions

(HxW) in mm:

880 x 490

Additional Features Residual heat indicators Child lock Red LEDs

Bevelled 4 sides Electricity loading 7800W

(STOP) Stop & Go

💩 Auto Off

Energy Rating: N/A	
Appliance Dimensions	Bui
(HxWxD) in mm:	(Hx

50 x 780 x 520

ilt-in Dimensions IxW) in mm: 750 x 490





60cm Ceramic Hob HK634060XB

KEY FEATURES



FUNCTIONS

(R) AutoMax	(TOP) Stop & Go
💮 Count Up Timer	(b) Auto Off
Minute Minder	
Eco Timer	

Additional Features

Residual heat indicators Child lock Red LEDs

Steel frame Electricity loading 7000W

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 38 x 576 x 516

CERAMIC HOBS








60cm Ceramic Hob HK624010FB

KEY FEATURES



FUNCTIONS

💩 Auto Off



FUNCTIONS

4 Four Cooking Zones

60cm Ceramic Hob

HK614000CB

Additional Features

Residual heat indicators Child lock Red LEDs Bevelled 4 sides Electricity loading 6400W

Additional Features

Frameless Electricity loading 6000W

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 38 × 590 × 520

Built-in Dimensions (HxW) in mm: 560 × 490 Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 38 × 590 × 520



GAS COOKING WITH ABSOLUTE ASSURANCE.



TouchSure Hob

The advanced TouchSure hob from AEG comes with a range of reassuring safety features that provide absolute confidence in – and absolute command over – gas cooking. It's a traditional method harnessed with our responsive technology, instilling confidence to turn up the heat.

0.









FlameLight

FlameLight LED indicators tell you if a burner is turned on or off. And residual heat indicators show whether pan supports are still hot after use.



Vertical Flame

The unique design of the Flush Vertical flame burners makes it possible to integrate them into the glass hob top, so you have a smooth hob surface that is stylish, as well as very easy to clean.



Hob²Hood

The AEG Hob²Hood adapts to your cooking to keep your kitchen free of steam and vapours without you even having to touch it.

GAS HOBS





90cm TouchSure Gas on Glass Hob HVB95450IB

KEY FEATURES

🛞 Wok Burner

3 Semi-rapid Burners



💧 1 Aux. Burner

HKB95540NB KEY FEATURES

90cm FlameLight Gas on Glass Hob

Red LED Red LED Hob³hood Minute Cast Iron Pan Auto Ignition FUNCTIONS Image: Supports Wok Burner Image: Supports 1 Aux. Burner

Wok Burner	
🔕 3 Semi-rapid Burners	



90cm Gas Hob with 6 Burners HGB95520YM

KEY FEATURES

Additional Features

Thermocouple

		AUTOMATK		
Rotary Controls	Cast Iron Pan Supports	Auto Ignition		

Wok Burner	🔇 2 Aux. Burners
🔕 2 Semi-rapid Burners	🚯 1 Rapid Burner

Additional	Features

Thermocouple Residual heat indicators Child lock

Additional Features

Residual heat indicators

Energy Rating: N/A		Energy Rating: N/A		Energy Rating: N/A	
Appliance Dimensions	Built-in Dimensions	Appliance Dimensions	Built-in Dimensions	Appliance Dimensions	Built-in Dimensions
(HxWxD) in mm:	(HxW) in mm:	(HxWxD) in mm:	(HxW) in mm:	(HxWxD) in mm:	(HxW) in mm:
52 x 880 x 510	850 x 490	40 x 880 x 510	830 x 480	60 x 858 x 821	830 x 480

112



75cm TouchSure Gas on Glass Hob HVB75450IB

KEY FEATURES



FUNCTIONS



Additional Features

Thermocouple Residual heat indicators Child lock

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 52 x 750 x 510

GAS HOBS





75cm Flush Vertical Flame Hob

HG755820UM

KEY FEATURES

75cm Flush Vertical Flame Gas on Glass Hob HG795840NB


KEY FEATURES



(2 Aux. Burners




(2 Semi-rapid Burners

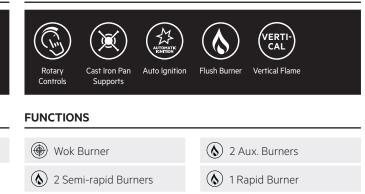



75cm FlameLight Gas on Glass Hob HKB75540NB

KEY FEATURES



🔕 3 Semi-rapid Burners

Additional Features

Thermocouple

Additional Features

Thermocouple

Additional Features	
Thermocouple	

Residual heat indicators

Energy Rating: N/A		Energy Rating: N/A		Energy Rating: N/A	
Appliance Dimensions (HxWxD) in mm:	Built-in Dimensions (HxW) in mm:	Appliance Dimensions (HxWxD) in mm:	Built-in Dimensions (HxW) in mm:	Appliance Dimensions (HxWxD) in mm:	Built-in Dimensions (HxW) in mm:
45 x 740 x 510	560 x 490	45 x 745 x 515	560 x 490	40 x 740 x 510	560 x 480



75cm Slim Ceramic Gas on Glass Hob HG775450VB

KEY FEATURES



FUNCTIONS



Additional Features

Thermocouple

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 46 x 740 x 510

GAS HOBS







KEY FEATURES





70cm Semi-Flush Gas on Glass Hob

EFFI-CIENT X Rotary Controls Cast Iron Pan Auto Ignition Supports Efficient Burners

FUNCTIONS

Wok Burner	(1 Aux. Burner
🔕 3 Semi-rapid Burners	

0	 Worranty
99999	

75cm Ultraflat Hob HGB75301UM

KEY FEATURES

Rotary Controls	Cast Iron Pan	Auto Ignition	EFFI- CIENT Efficient Burners	
FUNCTION	Supports		Burners	
Wok	Burner		(🔕 1 Aux. Burner	

🚯 1 Aux. Burner

Semi-rapid Burners

Additional Features

🛞 Side Wok Burner

Semi-rapid Burners

Thermocouple

Additional Features

Thermocouple

Additional Features Thermocouple

S

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 53 x 766 x 516

Built-in Dimensions (HxW) in mm: 750 x 490

🚯 1 Aux. Burner

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 53 x 696 x 516

Built-in Dimensions (HxW) in mm: 680 x 490

Energy Rating: N/A	
Appliance Dimensions	Built-in Dimensions
(HxWxD) in mm:	(HxW) in mm:
45 x 745 x 515	560 x 480

Hobs

GAS HOBS






75cm Gas Hob with Central Wok Burner

HG755450SY

KEY FEATURES

75cm Gas Hob with Side Wok Burner HG755551SY

KEY FEATURES





			EFFI- CIENT	
Rotary Controls	Cast Iron Pan Supports	Auto Ignition	Efficient Burners	
FUNCTION	IS			



75cm Hob with Enamel Pan Supports HG745451SM

KEY FEATURES

Rotary Controls	Enamel Pan Supports	Auto Ignition	EFFI- CIENT Efficient Burners	
FUNCTION	NS			
Wok	Burner		(b) 1 Aux. E	Burner
🔕 2 Sen	ni-rapid Burı	ners	💧 1 Rapid	Burner

Thermocouple

Additional Features

(2 Semi-rapid Burners

Thermocouple

Additional Features Thermocouple

Energy Rating: N/A

(HxWxD) in mm:

40 x 744 x 510

Appliance Dimensions

Built-in Dimensions (HxW) in mm: 560 x 480

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 745 x 510

Built-in Dimensions (HxW) in mm: 560 x 480

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 40 x 744 x 510

Built-in Dimensions (HxW) in mm: 560 x 480

(1 Rapid Burner

Wok Burner

(2 Semi-rapid Burners







60cm Flush Vertical Flame Gas on Glass Hob HG694840NB

KEY FEATURES





Additional Features

Thermocouple

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 45 x 590 x 520

GAS HOBS





60cm Stainless Vertical Flame Hob HG654820UM

KEY FEATURES



(1 Aux. Burner

60cm FlameLight Gas on Glass Hob HKB64540NB

KEY FEATURES

X Rotary Controls Cast Iron Pan Auto Ignition Supports Minute Minder Hob²Hood FUNCTIONS

Wok Burner (1 Aux. Burner (2 Semi-rapid Burners



60cm Slim Ceramic Gas on Glass Hob HG674550VB

KEY FEATURES

Rotary Controls	Cast Iron Pan Supports	Auto Ignition	EFFI- CLENT Efficient Burners	
FUNCTION	NS			
Wok	Burner		() 1 Aux. Burner	

Additional Features

Thermocouple

(2 Semi-rapid Burners

Additional Features

💧 1 Rapid Burner

(2 Semi-rapid Burners

Thermocouple

Additional Features Thermocouple

Residual heat indicators

Energy Rating: N/A		Energy Rating: N/A		Energy Rating: N/A	
Appliance Dimensions	Built-in Dimensions	Appliance Dimensions	Built-in Dimensions	Appliance Dimensions	Built-in Dimensions
(HxWxD) in mm:	(HxW) in mm:	(HxWxD) in mm:	(HxW) in mm:	(HxWxD) in mm:	(HxW) in mm:
45 x 590 x 520	560 x 490	40 x 590 x 520	560 x 480	46 x 590 x 520	560 x 480



60cm Semi-Flush Gas on Glass Hob HG694550XB

KEY FEATURES



FUNCTIONS



Additional Features

Thermocouple

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 53 x 576 x 516

GAS HOBS






60cm Gas Hob with Wok Burner

60cm Ultraflat Hob

HGB64301UM **KEY FEATURES**




💧 1 Aux. Burner

Built-in Dimensions

(HxW) in mm:

560 x 480



(2 Semi-rapid Burners

Rotary Controls	Cast Iron Pan Supports	Auto Ignition	Efficient Burners		
FUNCTION	FUNCTIONS				

Built-in Dimensions

(HxW) in mm:

560 x 495

HG654550SY

KEY FEATURES

Wok Burner	(1 Aux. Burner
(2 Semi-rapid Burners	



60cm Gas Hob with Cast Iron Supports HG654351SM

KEY FEATURES

Rotary Controls	Cast Iron Pan Supports	Auto Ignition	Efficient Burners
FUNCTION	٩S		
🔕 1 Rap	id Burner		() 1 Aux. Burner

(2 Semi-rapid Burners

Additional Features

Thermocouple

Energy Rating: N/A

(HxWxD) in mm:

41 x 595 x 525

Appliance Dimensions

Additional Features

Thermocouple

Energy Rating: N/A

Appliance Dimensions

(HxWxD) in mm:

40 x 595 x 510

Additional Features Thermocouple

Energy Rating: N/A				
Appliance Dimensions (HxWxD) in mm:	Built-in Dimensions (HxW) in mm:			
40 x 595 x 510	560 x 497			



60cm Gas Hob with Wok Burner HG644351SM

KEY FEATURES



FUNCTIONS



Additional Features

Thermocouple

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 40 x 595 x 510

MIXED FUEL HOBS





60cm Mixed Fuel Hob

HD634170NB

KEY FEATURES

90cm Mixed Fuel Hob
HD955100NB

KEY FEATURES



FUNCTIONS

🛞 Wok Burner

Stop & Go

Rotary and Touch Controls	Cast Iron Pan Supports	Auto Ignition

FUNCTIONS

(++) 4 Induction Zones

(1 Rapid Burner	(*)
(1 Semi-rapid Burner	(STOP + GO

÷)	2 Induction Zones
TOP GO	Stop & Go

Additional Features


Thermocouple

Additional Features

Thermocouple


Energy Rating: N/A		Energy Rating: N/A		Energy Rating: N/A	
Appliance Dimensions (HxWxD) in mm:	Built-in Dimensions (HxW) in mm:	Appliance Dimensions (HxWxD) in mm:	Built-in Dimensions (HxW) in mm:	Appliance Dimensions (HxWxD) in mm:	Built-in Dimensions (HxW) in mm:
47 x 880 x 520	830 x 490	50 x 590 x 520	560 x 490	55 x 360 x 520	340 x 490

CRYSTALLINE HOBS



MaxiSense® 2 Zone Induction Hob HC452401EB

KEY FEATURES



FUNCTIONS Image: Book of the stress of the stres


Residual heat indicators	Red LEDs
Child lock	Electricity loading 3700V

124





Teppanyaki with DirekTouch HC452601EB KEY FEATURES

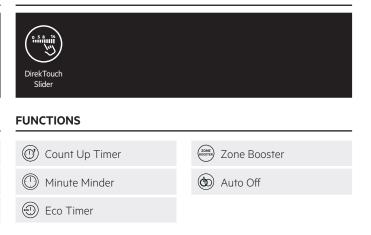

Additional Features

Residual heat indicators Child lock Red LEDs Electricity loading 3200W

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 125 x 360 x 520

CRYSTALLINE HOBS



Induction Hob with Compatible Wok HC451501EB

KEY FEATURES



 \sim

\bigcirc	Count	Up	Timer

	Minute	Minder
--	--------	--------

🕑 Eco Timer

Zone Booster

Double Gas Hob HC412001GB KEY FEATURES



FUNCTIONS

🚯 1 Aux. Burner



Built-in Dimensions

(HxW) in mm:

340 x 490

FUNCTIONS

Auto Ignition

Gas Wok Burner

KEY FEATURES

HC411521GB

Cast Iron Support

🛞 Wok Burner

Additional Features

Energy Rating: N/A

(HxWxD) in mm:

55 x 360 x 520

Appliance Dimensions

Residual heat indicators Child lock

Red LEDs Electricity loading 3200W

Built-in Dimensions

(HxW) in mm:

340 x 490

(STOP) Stop & Go

💩 Auto Off

Additional Features

Energy Rating: N/A

Appliance Dimensions

(HxWxD) in mm:

60 x 360 x 520

Thermocouple

Additional Features

Thermocouple

Energy Rating: N/AAppliance Dimensions
(HxWxD) in mm:
60 × 360 × 520Built-in Dimensions
(HxW) in mm:
340 × 490





Ceramic Hob with DirekTouch HC452021EB

KEY FEATURES



FUNCTIONS

\bigcirc	Count Up Timer	Stop & Go
	Minute Minder	(d) Auto Off
	Eco Timer	

Additional Features

Residual heat indicators Child lock Red LEDs Electricity loading 3500W

Energy Rating: N/A

Appliance Dimensions (HxWxD) in mm: 38 × 360 × 520

FREESTANDING COOKING

However you like to cook and whatever your favourite dishes are, there's an AEG oven that's right for you.

Featuring our intelligent technology, every oven makes it effortless and enjoyable to create great tasting food, exactly the way you like it.



aeg.co.uk/kitchen/cooking/cookers


PERFECT COMBINATION IN YOUR KITCHEN

SurroundCook®

Unlike standard cookers, the AEG SurroundCook[®] oven's advanced fan technology ensures that every part of your dish gets exactly the heat it needs. Evenly. Consistently. Wherever it's placed. Whether it's one dish or several. No more turning dishes halfway through cooking. Just the results that meet your expectations. Every time.



Standard oven SteamBake™ oven

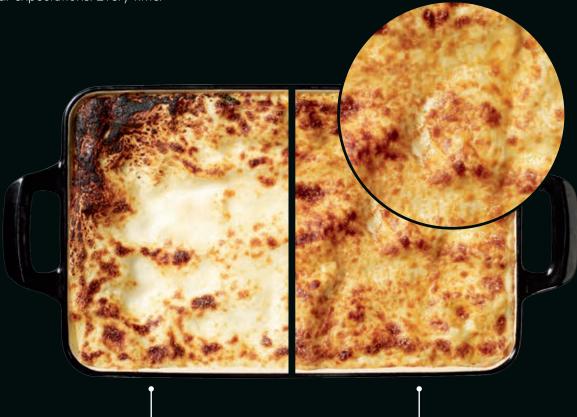



SurroundCook® oven





SteamBake™

The SteamBake[™] function adds the right amount of humidity at the start of the cooking process, allowing for better dough texture, greater rise and the perfect crust – resulting in great tasting baking results every time.



Food Sensor

By precisely measuring the core temperature of your food, the food sensor lets you know when the desired temperature has been achieved. Once it hits the required temperature, an alarm will sound and the oven will switch off automatically.



Catalytic Self Cleaning

Our cookers with catalytic cleaning features include a special catalytic enamel cooker lining. This helps to burn off food residue and grease when the cooker is hot – keeping the cooker clean even while you are cooking.

A GUIDE TO COOKING ICONS

KEY FEATURES



Hot air fan that circulates the air more effectively than a conventional oven so that your food gets evenly cooked anywhere in the oven.



The catalytic lining absorbs the grease from cooking and is activated by regular heating to 220°C. The grease residue is oxidised leaving the catalytic surface clean.



Both oven cavities are multifunctional, meaning that they have all of the traditional cooking functions including True Fan.



Allows you to pull the shelves smoothly out of the oven. This enables safe and

easy access to the contents of your oven.



Precise timer that switches off the oven at the time you require. Ideal for dishes with a long cooking process.



All of our single ovens have an extra large capacity, allowing you to cook on all 5 levels simultaneously.



Adds a bit of steam for the right colour and crust, improving all of your baking results.



Food sensor that adapts to what you are cooking and helps you get the results your are aiming for. Just tell the oven how you want your dish cooked and the oven will let you know once your food has reached the right temperature.



Perfect cooking results guaranteed by setting the cooking time length, with an acoustic signal to let you know it has finished.



Cast iron pan supports provide a robust and durable cooking support with professional design. Safe, long lasting and easy to clean.



The MaxiSense[®] induction hob has self-sizing cooking zones. Each zone detects the size and shape of the pan you're using, however large or small.

FUNCTIONS



A function that reduces all zones in operation to a 'keep warm' setting.



AutoMax

spring rolls.

Ÿ

l°C

good result.

AU

GRATIN

the required setting. $\overline{\mathbf{w}}$





Oven is heated by the bottom element only. Food is gently reheated, ideal for pies and pastries as it keeps the pastry crisp.



Defrost

Defrost your frozen food gently in half the usual time. Hot air is quickly circulated inside the oven cavity.



Adds a bit of steam for the right colour and crust, improving all of your baking results.





Residual heat indicators

Once a hob zone is turned off a light will illuminate on the control knob to indicate the zone is still hot. The light will switch off after a period of time.



00



The hob zone will reach the required temperature in 10 seconds.



Au Gratin



The hob will apply full output of heat at the beginning, before automatically dropping to

Fast Grilling

Combining grill, fan and bottom heat to efficiently produce delicious dishes. Excellent on semi-processed food such as chips and

Turbo Grilling

Heat from the top element is circulated by the fan, sealing and crisping the food.

Slow Cooking

Two slow cook options, depending on the quantity of food being cooked. Low temperature combined with patience will guarantee a

For dishes such as lasagne or potato gratin.

1 Rapid and 3 Semi-rapid Burners

Differing power levels offer the flexibility to bring liquid to the boil rapidly or simply to simmer.

4 Zones With 3 Power Levels

The four zone hob comes in a variety of power range setting for flexible cooking.

True Fan Cooking

Our true fan cooking system gently circulates hot air through the oven cavity. As the oven heats up faster, lower temperatures and shorter cooking times are used to achieve those delicious results.



Designed to ensure pastry bases, quiches and pizzas are cooked to your taste.

Minute Minder

Each induction cooking zone has an independent 99 minute timer. The timer will switch the zone off after the time has elapsed.



Retains moisture within the oven, thus achieving light fluffy results whilst using the oven in an energy efficient way.



The gas hob has a variety of burners to adapt to different saucepan sizes and contents.

FREESTANDING COOKING

Our MaxiSense® induction hob has flexible sections ensuring pots and pans have maximum space and choice of position. The four zones can be switched to two large cooking areas, ideal for large pans or fish kettles.

Stop & Go

Stop & Go allows you to reduce all the hob zones to a 'keep warm' setting and back again – all at the touch of a button. Ideal for unexpected interruptions.



ELECTRIC



60cm Black Fully Programmable Multifunction Cooker with Induction Hob CIB6740ACB **KEY FEATURES**

	Dual ifunction Telescopic Runners MaxiSense®	
Programmable HOB FUNCTIONS	MAIN OVEN FUNCTIONS	
(TRB) Stop & Go	(🗑 True Fan Cooking	
(R) Auto Heat Up	🐨 Turbo Grilling	
Individual Zone Timers and Minute Minder	Grilling	
🛞 Residual Heat Indicator	Conventional/ Traditional Cooking	
(+3) 4 Zones with 3 Power Levels	(RATIN) Browning/Au Gratin	
TOP OVEN FUNCTIONS	(2) Moist Fan Baking	
Conventional/ Traditional Cooking	🐨 Steam Baking	
📼 Fast Grilling	(PC) Slow Cooking	
Model Features	Triple door glazing	
Fully programmable timer	3 shelves	
39 ltr top oven capacity	Removable glass door panes	
73 ltr bottom oven capacity	Clock and Minute Minder	
Lighting	XXL meat/grill pan	
Energy Rating: A/A	Appliance Dimensions (HxWxD) in mm: 894–912 x 600 x 609	
Also available: CIB6740ACM – Stainless steel		



60cm Stainless Steel Multifunction Cooker with Induction Hob CIB6731ACM KEY FEATURES

	ual MaxiSense®
XXL XXL SteamBake [™] Minute	Minder
HOB FUNCTIONS	MAIN OVEN FUNCTIONS
Stop & Go	💮 True Fan Cooking
(A) Auto Heat Up	(🕅 Turbo Grilling
D Individual Zone Timers	Grilling
🛞 Residual Heat Indicator	Conventional/ Traditional Cooking
(4+3) 4 Zones with 3 Power Levels	(au) Browning/Au Gratin
TOP OVEN FUNCTIONS	Moist Fan Baking
Conventional/ Traditional Cooking	🛞 Steam Baking
💭 Fast Grilling	(Pc) Slow Cooking
Model Features	· · · · · · · · · · · · · · · · · · ·
39 ltr top oven capacity	3 shelves
73 ltr bottom oven capacity	Removable glass door panes
Lighting	Clock and Minute Minder
Triple door glazing	XXL meat/grill pan
Energy Rating: A	Appliance Dimensions (HxWxD) in mm: 894–912 x 600 x 609





60cm Stainless Steel Cooker with Induction Hob CIB6730ACM

KEY FEATURES

SurroundCook* Catalytic Liners Minut SteamBake [™] MaxiSense*	te Minder XXL
HOB FUNCTIONS	MAIN OVEN FUNCTIONS
🐨 Stop & Go	(🗑 True Fan Cooking
(A) Auto Heat Up	🛞 Steam Baking
D Individual Zone Timers	Moist Fan Baking
🛞 Residual Heat Indicator	
(+3) 4 Zones with 3 Power Levels	
TOP OVEN FUNCTIONS	
Conventional/ Traditional Cooking	
🖶 Fast Grilling	
Model Features	
39 ltr top oven capacity	3 shelves
73 ltr bottom oven capacity	Clock and Minute Minder
Lighting Triple door glazing	XXL meat/grill pan

Energy Rating: A/A

Appliance Dimensions (HxWxD) in mm:

(HXWXD) in mm: 894–912 x 600 x 609

FREESTANDING COOKING

ELECTRIC



60cm Black Multifunction Cooker with SteamBake™ CCB6761ACB **KEY FEATURES**

	ATA- YTIC tric Liners Multifunction Telescopic Runners
Fully XXL Stea Programmable	mBake™
HOB FUNCTIONS	MAIN OVEN FUNCTIONS
(4+3) 4 Zones with 3 Power Levels	🛞 True Fan Cooking
🛞 Residual Heat Indicator	(👻 Turbo Grilling
(10) Fast Heat Up Zones	Grilling
TOP OVEN FUNCTIONS	Conventional/ Traditional Cooking
Conventional/ Traditional Cooking	(2) Moist Fan Baking
📼 Fast Grilling	🛞 Steam Baking
	(rc) Slow Cooking
Model Features	
Fully programmable timer	Triple door glazing
39 ltr top oven capacity	3 shelves
73 ltr bottom oven capacity	Clock and Minute Minder



60cm Stainless Steel Cooker with Food Sensor and Telescopic Runners CCB6760ACM **KEY FEATURES**

KET FEATURES	
SurroundCook® Food Sensor Cataly	rtic Liners Telescopic Runners
HOB FUNCTIONS	MAIN OVEN FUNCTIONS
(4+3) 4 Zones with 3 Power Levels	Y True Fan Cooking
🛞 Residual Heat Indicator	🐨 Steam Baking
(10) Fast Heat Up Zones	(2) Moist Fan Baking
TOP OVEN FUNCTIONS	
Conventional/ Traditional Cooking	
💮 Fast Grilling	

Model Features	
Fully programmable timer	Triple door glazing
39 ltr top oven capacity	3 shelves
73 ltr bottom oven capacity	Clock and Minute Minder
Lighting	XXL meat/grill pan
Energy Rating: A/A	Appliance Dimensions (HxWxD) in mm: 894–912 × 600 × 609

Also available: CCB6761ACM – Stainless Steel

	(HxWx 894–91
Energy Rating: A/A	Applia
Lighting	XXL me
73 ltr bottom oven capacity	Clock a
39 ltr top oven capacity	Rotary
Fully programmable timer	3 shelve

Model Features

ves controls and Minute Minder neat/grill pan ance Dimensions xD) in mm: 912 x 600 x 609

Triple door glazing



60cm Black Cooker with SteamBake™ CCB6740ACB **KEY FEATURES**

SurroundCook [®] Catalytic Liners F	poram HABLE Fully rammable
HOB FUNCTIONS	MAIN OVEN FUNCTIONS
4×3 4 Zones with 3 Power Levels	🛞 True Fan Cooking
Residual Heat Indicators	🛞 Steam Baking
(19) Fast Heat Up Zones	Moist Fan Baking
TOP OVEN FUNCTIONS	
Conventional/ Traditional Cooking	
📼 Fast Grilling	

Energy Rating: A/A	Appliance Dimensions (HxWxD) in mm: 894–912 x 600 x 609
Lighting	XXL meat/grill pan
73 ltr bottom oven capacity	Clock and Minute Minder
39 ltr top oven capacity	Rotary controls
Fully programmable timer	3 shelves
Model Features	Triple door glazing

Also available: CCB6740ACM – Stainless Steel

DUAL FUEL



60cm Stainless Steel Dual Fuel Cooker with Electric Oven and Gas Hob

CKB6540ACM

KEY FEATURES

,	escopic inners
HOB FUNCTIONS	MAIN OVEN FUNCTIONS
(1N3) 4 Hob Burners in 3 Sizes	True Fan Cooking
(1+3) 1 Rapid and 3 Semi-rapid Burners	Defrost
TOP OVEN FUNCTIONS Conventional/ Traditional Cooking Fast Grilling	
C Grilling	
Model Features	Triple door glazing
Balanced glass lid	3 shelves
39 ltr top oven capacity	Rotary controls
77 ltr bottom oven capacity	Clock and Minute Minder
Lighting	XXL meat/grill pan
Energy Rating: A/A	Appliance Dimensions (HxWxD) in mm: 894–912 x 600 x 609

FREESTANDING COOKING

GAS



60cm Stainless Steel Gas Cooker with Cast Iron Pan Supports CGB6133CCM **KEY FEATURES**

Cast Iron Pan Supports Cast Iron Pan Supports Catalytic Liners Catalytic Minute Minder	
XXL	
HOB FUNCTIONS	MAIN OVEN FUNCTIONS
(IN) 4 hob burners in 3 sizes	(Traditional Gas Cooking
1 Rapid and 3 Semi-rapid Burners	
TOP OVEN FUNCTIONS	
(Traditional Gas Cooking	
Grilling	
Model Features	Door glazing
Balanced glass lid	3 shelves
36 ltr top oven capacity	Rotary controls
83 ltr bottom oven capacity	Clock and Minute Minder
Main oven lighting	XXL meat/grill pan
Energy Rating: A/A	Appliance Dimensions (HxWxD) in mm: 894–912 x 600 x 609



HOODS

Our cooking environments need to be fresh, bright and peaceful, enriching the time that we spend there. We use advanced technology to ensure that the design and build of our cooker hoods give you the optimum combination of high-end design and powerful functionality.





4.4

BREEZE FUNCTION

aeg.co.uk/kitchen/cooking/cooker-hoods



A FRESHER KITCHEN, HANDS FREE.




Hob²Hood

The AEG Hob²Hood adapts to your cooking to keep your kitchen free of steam and vapours without you even having to touch it.

As you cook, the hood activates automatically, monitoring the fluctuating heat and steam of every simmer and boil, effortlessly maintaining the freshness of your kitchen. Your attention stays, as it should, on preparing, finessing and enjoying your dish.











SilenceTech

Our advanced hood technology allows Cooker Hoods to extract at a low 54dB, allowing you to enjoy the full cooking experience without loud sounds from your appliance.



Breeze Function

The breeze function quietly refreshes the air in your kitchen to create a more enjoyable atmosphere to relax or entertain. This function will automatically switch off for your convenience.



LED Lighting

Provides the possibility to adjust the intensity of the light according to your needs, creating the perfect ambient illumination in your kitchen.

Hoods

Aligned across our range, your choice of hood will integrate seamlessly with any of our hob models. Our top line models feature our signature flow line for design harmony, together with a sophisticated white LED display on layered glass and metal.

A GUIDE TO HOOD ICONS

KEY FEATURES

\frown	
\cong)	
ر ب	
	Hob ² Hood

A wireless function that, when paired with suitable hobs, automatically activates and regulates the cooker hood according to your cooking needs. It provides a fresher kitchen environment so you can focus on achieving great taste.



Smooth and precise control of all your hood's functions with a simple touch on glass - easy to use and easy to clean.



144

Push Button Controls

Precise control of the setting levels is achieved via the squared push buttons.



High filter efficiency combined with perfect stainless steel designed filter covers – the perfect look and easy to clean in the dishwasher.



LED lighting enables excellent visibility during the entire cooking process by providing ambient lighting in the kitchen.



Crisp bright illumination, or a gentle glow? Dimmer-controlled LED lighting means you can adjust the effect at the touch of a fingertip.



Beautiful design with unique black glass.



The anti fingerprint stainless steel finishing protects the surface of your cooker hood from fingerprints.

Stainless Steel with Glass

Perfect combination of stainless steel and glass to create a unique and professional style in your kitchen.

FUNCTIONS



Fan Speeds

Number of fan speeds, allowing you to adjust the power, noise and energy consumption.



Reduces the noise level down to the lowest number of decibels allowing you to cook peacefully and enjoy all your favourite food without annoying sounds from the appliance.



Refreshes the air in your kitchen after cooking at a very low noise level so that you have a more enjoyable and quiet atmosphere to relax or entertain.

Î **Remote Control Included**

Easy and fast control of all the hood's functions thanks to the remote control.



Extendable to 80cm

An innovative addition that allows you to expand your hood from 60cm to 80cm.



90cm Designer Island Hood **DLE0970M**

KEY FEATURES



Push Button Controls

FUNCTIONS

(Y) 3+ Intensive Fan Speeds

(a) Remote Control

Additional Features

Recirculation Model Only Motor speed: 660 m3/h

Noise: 42dB - 72dB

Energy Rating: N/A

Dimensions (HxWxD) in mm: (850-1250) x 900 x 440







65cm Designer Island Hood DLE0630B

KEY FEATURES



FUNCTIONS

(a) Remote Control

Additional Features

Recirculation Model Only Motor speed: 330 m3/h

Noise: 44dB - 70dB

Energy Rating: N/A Dimensions (HxWxD) in mm: (850-1250) x 655 x 655

Also available: DLE0630W - White



50cm Designer Island Hood DLE0431W

KEY FEATURES



100cm Island Hood DIK7190HG

KEY FEATURES

LED Lighting Push Button Controls		Stainless Steel Touch on Glass Controls	Hob ² Hoc
FUNCTIONS		FUNCTIONS	
(Y) 3+ Intensive Fan Speeds		🕎 5 Fan Speeds	
(a) Remote Control		(n) Breeze Function	
Additional Features		Additional Features	
Recirculation Model Only	Noise: 44dB - 70dB	Charcoal filter included	Ν
Motor speed: 330 m3/h		Motor speed: 801 m3/h	
Energy Rating: N/A		Energy Rating: A++	
Dimensions (HxWxD) in mm:	(850-1250) x 500 x 500	Dimensions (HxWxD) in mm	(967–74
Also available: DLE0431B - Bla	ack / DLE0431M - Stainless Steel		

Stainless Steel	Touch on Glass Controls	Hob ²	Hood	Dimmable LED Lighting	Designer Filter Cover
FUNCTIONS					
🐑 5 Fan Sp	eeds		dB)))	SilenceTech	
(n) Breeze F	unction				
Additional Fea	atures				
Charcoal filter included Noise: 71dB – 36dB					
Motor speed: 8	801 m3/h				
Energy Rating Dimensions (H		1: (967-	-747) 7	75 x 1000 x 700)



100cm Island Hood DIE6180HM

KEY FEATURES

Stainless Steel Touch on Glass Controls	Hob ² Hood Dimmable LED Lighting
FUNCTIONS	
(Y) 5 Fan Speeds	(IIII) SilenceTech
(***) Breeze Function	
Additional Features	
Charcoal filter included	Noise: 71dB – 52dB
Motor speed: 710 m3/h	
Energy Rating: A+	



90cm Downdraft Hood DDE5980G

KEY FEATURES

Stainless Steel Touch on With Black Glass Glass Controls	LED Strip Lighting		
FUNCTIONS			
🕎 5 Fan Speeds	(a) SilenceTech		
(***) Breeze Function			
Charcoal filter included	Noise: 70dB – 40dB		
Motor speed: 700 m3/h			
Energy Rating: A			

Dimensions (HxWxD) in mm: 407 x 880 x 95



120cm Ceiling Hood DCK6290HG

KEY FEATURES



FUNCTIONS

🐑 4 Fan Speeds

(a) Remote Control Included

Additional Features

Charcoal filter EFF62 (accessory) Noise: 70dB – 45dB Motor speed: 870 m3/h


Energy Rating: A+

Dimensions (HxWxD) in mm: $311 \times 1199 \times 499$



90cm Ceiling Hood DCE5980HM

KEY FEATURES



(a) Remote Control Included

Additional Features

Charcoal filter EFF62 (accessory) Noise: 73dB – 54dB Motor speed: 710 m3/h

Energy Rating: A

Dimensions (HxWxD) in mm: $311 \times 900 \times 500$



90cm / 60cm Designer Screen Hood DVK6980HB / DVK6680HB

KEY FEATURES

Stainless Steel Touch on Glass Controls	Hob ³ Hood Dimmable LED Lighting
FUNCTIONS	
🕅 5 Fan Speeds	(n))) SilenceTech
(***) Breeze Function	
Additional Features	
Charcoal filter included	Noise: 68dB – 52dB
Motor speed: 720 m3/h	

Energy Rating: A+

Dimensions (HxWxD) in mm: DVK6980HB 90cm - (1445-1095) 465 x 898 x 396 DVK6680HB 60cm - (1445-1095) 465 x 598 x 396



80cm / 55cm Designer Screen Hood DVB4850B / DVB4550B

KEY FEATURES





Controls



LED Spotlights

FUNCTIONS

🕅 3 Fan Speeds

Additional Features


Charcoal filter included Motor speed: 647 m3/h Noise: 67dB

Energy Rating: B **Dimensions (HxWxD) in mm: DVB4850B 80cm** – 477 x 800 x 335 **DVB4550B 55cm** – 477 x 550 x 335



80cm / 55cm Designer Screen Hood DVB4850M / DVB4550M

KEY FEATURES



Noise: 67dB



💓 3 Fan Speeds

Additional Fe	eatures
---------------	---------

Charcoal filter included Motor speed: 647 m3/h


Energy Rating: B

Dimensions (HxWxD) in mm: DVB4850M 80cm - 477 x 800 x 335 DVB4550M 55cm - 477 x 550 x 335



90cm T Shape Chimney Hood DBK7990HG

KEY FEATURES

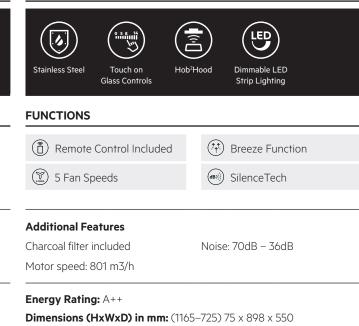



90cm / 70cm / 60cm T Shape Chimney Hood DBE6980HM / DBE6780HM / DBE6680HM

KEY FEATURES

Stainless Steel Touch on Glass Controls	Hob ² Hood Dimmable LED Strip Lighting
FUNCTIONS	
🐑 5 Fan Speeds	(m))) SilenceTech
(***) Breeze Function	
Additional Features	
Charcoal filter included	Noise: 71dB – 52dB
Motor speed: 710 m3/h	
Energy Rating: A+	
Dimensions (HxWxD) in m DBE6980HM 90cm - (890- DBE6780HM 70cm - (890-	–740) 60 x 898 x 470

DBE6680HM 60cm – (890–740) 60 x 598 x 470



90cm / 70cm / 60cm T Shape Chimney Hood DBB5960HM / DBB5760HM / DBB5660HM

DBB5660HM 60cm – (1155–635) 60 x 598 x 500

KEY FEATURES			
Stainless Steel Touch on Glass Controls			
FUNCTIONS			
(Y) 4 Fan Speeds SilenceTech			
Breeze Function			
Additional Features			
Charcoal filter included Noise: 73dB – 38dB			
Motor speed: 779 m3/h			
Energy Rating: A			
Dimensions (HxWxD) in mm: DBB5960HM 90cm – (1155–635) 60 x 898 x 500 DBB5760HM 70cm – (1155–635) 60 x 698 x 500			



90cm / 60cm Chimney Hood DKB5960HM / DKB5660HM

KEY FEATURES

FUNCTIONS



(B)) SilenceTech

Noise: 73dB – 38dB



```
tainless Steel Push Button LED Lighting
```

90cm / 60cm Chimney Hood

DKB4950M / DKB4650M

FUNCTIONS

🐑 3 Fan Speeds

Additional Features

🕅 4 Fan Speeds

(
 Breeze Function

Charcoal filter included Motor speed: 779 m3/h

Energy Rating: A

152

Dimensions (HxWxD) in mm: DKB5960HM 90cm - (1175-665) 140 x 898 x 500 DKB5660HM 60cm - (1175-665) 140 x 598 x 500

Additional Features

Charcoal filter included Motor speed: 603 m3/h

Energy Rating: B

Dimensions (HxWxD) in mm:

DKB4950M 90cm – (1090–665) 40 x 898 x 500 **DKB4650M 60cm** – (1090–665) 40 x 598 x 500

Noise: 69dB – 46dB



60cm Chimney Hood DTB3652M

KEY FEATURES



FUNCTIONS

📡 3 Fan Speeds

Extendable to 80cm

Additional Features

Charcoal filter included Motor speed: 600 m3/h Noise: 69dB – 52dB

Energy Rating: C

Dimensions (HxWxD) in mm: (1020-605) 53 x 600 x 500





90cm / 60cm Pull Out Hood DPB3931S / DPB3631S

KEY FEATURES



FUNCTIONS

🕅 3 Fan Speeds

Additional Features

Charcoal filter included Motor speed: 370 m3/h Noise: 68dB – 48dB

Energy Rating: C Dimensions (HxWxD) in mm: DPB3931S 90cm - (170) 40 × 900 × 280 DPB3631S 60cm - (179) 40 × 598 × 284



70cm Canopy Hood DGB3850M

KEY FEATURES



FUNCTIONS

📡 4 Fan Speeds

Addi	tional	Feat	tur	es	
~					

Charcoal filter included Motor speed: 600 m3/h

Energy Rating: C Dimensions (HxWxD) in mm: 245 x 700 x 285

Noise: 63dB – 49dB



60cm Integrated Hood DEB2631S

KEY FEATURES



FUNCTIONS

🐑 2 Fan Speeds

Additional Features

Charcoal filter included Motor speed: 352 m3/h

Noise: 62dB – 47dB

Energy Rating: D

Dimensions (HxWxD) in mm: 400 x 598 x 270



It's not just about the food – the style of cutlery and plates affect our perceptions of what we eat. A dark chocolate dish looks best when served on an angular plate, while a round plate is better for cheesecake. So you need a range of tableware that complements your food presentation and can be cared for in the most efficient way.

IN THIS SECTION

Fully Integrated Dishwashers	163–16
Semi-Integrated Dishwashers	16
Slimline Built-In Dishwashers	16
Freestanding Dishwashers	169–17
Freestanding Slimline Dishwashers	17







aeg.co.uk/kitchen/dishwashing/dishwashers

LIFTS GENTLE TO A NEW LEVEL.


INTORT LIFT




ComfortLift®

The ComfortLift® dishwasher is the first of its kind to gently slide the lower basket up for easy, ergonomic loading and unloading. That means less bending down, to make your life more comfortable.













158



QuickSelect

An intuitive slider lets you control your dishwasher on your own terms. Simple, premium control that adapts the wash according to your lifestyle, allowing you to select when you want your dishes clean. The machine does the rest.



AirDry Technology

Uses natural airflow to finish the drying. By automatically opening the door by 10cm in the last part of the cycle, you will get maximum drying performance while effectively reducing your energy costs – leaving your dishes spotless.



Sliding Hinges

Allows you to install the dishwasher with any door length without the need to cut the kitchen plinth. This is also suitable for plinthless kitchens. The best solution on the market – patented by AEG.


SUPERIOR CLEANING AND FULL COVERAGE.

With our ProClean range of dishwashers we deliver superior cleaning and drying, ensuring that you can clean more at the same time and get a great cleaning result with superb drying.



Satellite Spray Arms

The multiple double rotation of the Satellite Spray Arm sprays from continuously varying angles, leaving your dishes and cookware gleaming.



5 Spray Levels

Multi level spray reaches

every item anywhere,









	Standard Models	ProClean	Benefits
Internal Space	Suitable for plate sizes up to 31cm diameter	Suitable for plate sizes up to 33cm diameter	Fit more in!
Spray Levels	2 – 3	5	More spray levels for better cleaning.
Satellite Spray Arm	Selected models	Included as standard	Sprays from continuously varying angles and covers a lot more area compared to a standard spray arm.
Ceiling Spray Arm	Selected models	Included as standard	More spray levels for better cleaning
GlassCare Package	Selected models (SoftSpikes only)	Full package included as standard	Protects delicate glasses with soft grips, soft spikes and a dedicated glass programme. No more hand washing old and fragile glass.



Glass Care Programme

Special 45°C glass programme ensures perfect washing results while protecting your most precious glass, crystal and china.



XXL Interiors

The XXL interior of this dishwasher gives you an additional 10 litres of space – more capacity for those irregular shaped items.



Removable Cutlery Tray

Take your tray with you to the kitchen cutlery drawer for easy unloading. Best in class solutions for easy loading and unloading.

A GUIDE TO DISHWASHER ICONS

KEY FEATURES



The ComfortLift® basket rises on special hinges, ensuring less bending when loading and unloading dishes.



Simple, premium control that adapts the wash according to your needs, allowing you to select when you want your dishes clean.



Keeps you informed on the progress of the programme by projecting the remaining time on the floor.



The XXL interior of this dishwasher gives you an additional 10 litres of space, more capacity for those irregular shaped items and plates up to 33cm in diameter.



This dishwasher is so quiet it projects a tiny red or green beam on to the floor to tell you when it's running and when it's finished.



For ease of installation, the hinge on this model rises over the plinth level when the door is opened, so no need to cut the plinth.



Heavily soiled items, such as lasagne or crumble dishes, can be washed with a normal load by selecting the SprayZone option.



Delicate wine glasses are protected with our soft spikes, soft grips and dedicated GlassCare 45°C programme.

InteriorLight

Locate items at a glance thanks to the bright internal light.



50% less time thanks to increased power speed and water pressure.



Uses natural airflow to finish the drying. By automatically opening the door by 10cm in the last part of the cycle, you will get maximum drying performance leaving your dishes spotless.



Selected models have a higher level of internal finish, including stainless steel drawer handles and knife supports in the cutlery drawer.



Take your tray with you to the kitchen cutlery drawer for easy unloading. Best in class solutions for easy loading and unloading.



Our ProClean models have a larger usable internal space, combined with five spray levels, satellite and ceiling spray arm plus GlassCare package.



Run your dishwasher when it suits you, thanks to the up to 24 hour delay start function.



With this dishwasher you can choose to install it normally above a plinth. Alternatively, the sliding hinge is perfect for plinthless kitchens or for installation above a small cupboard.



The combination of four spray levels and lower satellite spray arm ensures superior cleaning levels.

DISHWASHERS

The AEG range of dishwashers is designed to meet the frustrations and needs of dishwasher users. The models are designed to give a better quality wash and superb drying results, combined with a larger capacity and useful features such as our glasscare package which looks after your best wine glasses.

ComfortLift®

The AEG ComfortLift® dishwasher is equipped with a special lower rack lifting mechanism, ensuring less bending when unloading the dishes to make your life more comfortable.




BUILT-IN DISHWASHERS





Fully Integrated ComfortLift® Dishwasher with ComfortRails and Internal Light FSK93807P

KEY FEATURES



PROGRAMMES - 7

160mins	Machine Care	
90mins	30min 60°	
60mins		
Auto 45° – 70°		
Eco		
Additional Features		
Auto load adjust: Sensor logic	Xtra power option	
24 hour delay	XtraDry	

Glass care option Extra silent option

Place Settings: 13

Noise Level: 39dB

Energy Rating: A+++

Water Usage: 11 ltr Appliance Dimensions (HxWxD) in mm: 818 x 596 x 550

Soft spikes and soft grips

Anti-flood protection


BUILT-IN DISHWASHERS





Fully Integrated 15 Place Setting Proclean Dishwasher with Deluxe Interior FSK84707P

KEY FEATURES

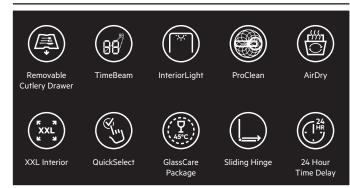

PROGRAMMES - 7

160mins	Machine Care
90mins	30min 60°
60mins	
Auto 45° – 70°	
Eco	

Additional Features

Auto load adjust: Sensor logic	Flexible basket
Xtra power option	XtraDry
Glass care option	Soft spikes and soft grips
Extra silent option	Anti-flood protection
Place Settings: 15	Water Usage: 11 ltr
Place Settings: 15 Noise Level: 42dB	Water Usage: 11 ltr Appliance Dimensions






Fully Integrated ComfortLift® Dishwasher

FSK63807P

KEY FEATURES

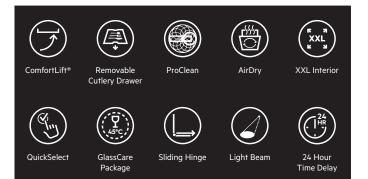

PROGRAMMES - 7

160mins	Machine Care
90mins	30min 60°
60mins	
Auto 45° – 70°	
Eco	

Additional Features Auto load adjust: Sensor logic Xtra power option

Energy Rating: A+++		
Noise Level: 44dB		
Place Settings: 13		
Extra silent option		
Glass care option		
Xila power opriori		

Anti-flood protection Water Usage: 11 ltr Appliance Dimensions (HxWxD) in mm: 818 x 596 x 550

Soft spikes and soft grips

Flexible basket

XtraDry







Fully Integrated ProClean 15 Place Setting Dishwasher with Superior Cleaning and Drying FSK63737P

KEY FEATURES

Removable Cutlery Drawer	ProClean	AirDry	XXL XXL XXL Interior	QuickSelect
24 HR 24 Hour Time Delay	GlassCare Package	Sliding Hinge	Light Beam	
PROGRAMM	ES – 7			

160mins	Machine Care
90mins	30min 60°
60mins	
Auto 45° – 70°	
Eco	

Additional Features	
Auto load adjust: Sensor logic	Lower basket glass holder
Xtra power option	XtraDry
Glass care option	Soft spikes and soft grips
Extra silent option	Anti-flood protection
Place Settings: 15 Noise Level: 44dB Energy Rating: A+++	Water Usage: 11 ltr Appliance Dimensions (HxWxD) in mm: 818 x 596 x 550







Fully Integrated ProClean Dishwasher with Sprayzone FSK62607P

KEY FEATURES



GlassCare Package

Sliding Hinge	





PROGRAMMES - 7

	Annelian an Dimensional
Place Settings: 13	Water Usage: 10.5 ltr
Xtra power option	
Glass care option	Anti-flood protection
SprayZone option	Soft spikes and soft grips
Auto load adjust: Sensor logic	XtraDry
Additional Features	Flexible basket
Eco	
Auto 45° – 70°	
60mins	
90mins	30min 60°
160mins	Machine Care


Noise Level: 44dB Energy Rating: A++ **Appliance Dimensions** (HxWxD) in mm: 818 x 596 x 550

BUILT-IN DISHWASHERS



Fully integrated 14 Place Setting Dishwasher with Cutlery Drawer FSK52917Z

KEY FEATURES



PROGRAMMES - 7

160mins	Machine Care
90mins	30min 60°
60mins	
Auto 45° – 70°	
Eco	

Additional Features


Auto load adjust: Sensor logic Auto off Glass care option	Flexible basket XtraDry Lower basket glass holder
Xtra power option	Anti-flood protection
Place Settings: 14 Noise Level: 44dB Energy Rating: A++	Water Usage: 10.5 ltr Appliance Dimensions (HxWxD) in mm: 818 x 596 x 550





Fully Integrated Dishwasher with Lower Basket Glass Holder FSK52617Z

KEY FEATURES

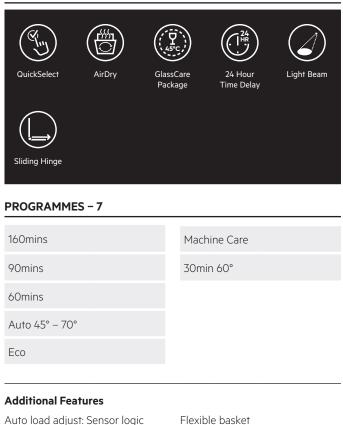

Energy Rating: A++	(HxWxD) in mm: 818 x 596 x 550
Noise Level: 44dB	Appliance Dimensions
Place Settings: 13	Water Usage: 9.9 ltr
Soft spikes	Lower basket glass holder
Glass care option	Anti-flood protection
Xtra power option	XtraDry
Auto load adjust: Sensor logic	Flexible basket





Fully Integrated Dishwasher with AirDry Technology FSB42607Z

KEY FEATURES

		(1) (1) (1) (1) (1) (1) (1) (1) (1) (1)		
QuickSelect	AirDry	24 Hour Time Delay	Light Beam	Sliding Hinge

PROGRAMMES - 5 90mins Auto 45° - 70° Eco Machine Care

30min 60°

Additional Features

Auto load adjust: Sensor logic Anti-flood protection Xtra power option Flexible basket XtraDry Place Settings: 13 Water Usage: 9.9 ltr Noise Level: 46dB

Energy Rating: A++

Appliance Dimensions (HxWxD) in mm: 818 x 596 x 550

SEMI-INTEGRATED BUILT-IN DISHWASHERS







Semi-Integrated ProClean Dishwasher with Superior Cleaning and Drying FEE62600PM

KEY FEATURES









AirDry

Function

GlassCare Package



-!-Double Fulcrum Hinge

PROGRAMMES - 6

Auto 45° - 70° Extra silent 50° Glass 45° Eco Intensive 70° 30min 60° **Additional Features**

Soft spikes	Anti-flood protection
Glass care	Soft grips
Auto off	XtraDry
Auto load adjust: Sensor logic	Flexible basket

Place Settings: 13 Noise Level: 47dB Energy Rating: A++


Water Usage: 10.5 ltr **Appliance Dimensions** (HxWxD) in mm: 818 x 596 x 550

SEMI-INTEGRATED BUILT-IN DISHWASHERS



Semi-Integrated Dishwasher with AirDry Technology FEB52600ZM

KEY FEATURES



Intensive 70° 30min 60°

Additional Features

Auto load adjust: Sensor logic	Flexible basket
Auto off	XtraDry
Glass care	Anti-flood protection
Soft spikes	
Place Settings: 13	Water Usage: 9.9 ltr
Noise Level: 47dB	Appliance Dimensions
Energy Rating: A++	(HxWxD) in mm:
	818 x 596 x 550

SLIMLINE BUILT-IN DISHWASHERS






Fully Integrated Slimline Dishwasher with Superior Cleaning and Drying FSK73400P

KEY FEATURES

-i_

Hinge

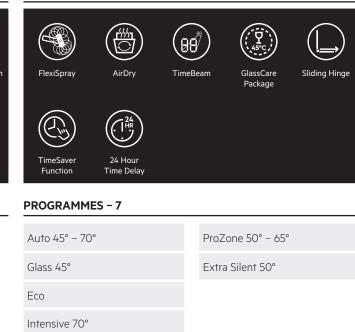

Auto 45° – 70°	ProZone 50° – 65°
Glass 45°	Extra Silent 50°
Eco	
Intensive 70°	
30min 60°	

Additional Features		
Auto load adjust: Sensor logic		
Auto off		

Glass care Soft spikes Place Settings: 9 Noise Level: 44dB

Energy Rating: A+++

Water Usage: 9.9 ltr Appliance Dimensions (HxWxD) in mm: 818 x 446 x 550

Flexible basket

Anti-flood protection

XtraDry





Fully Integrated Slimline Dishwasher with AirDry Technology FSB51400Z

KEY FEATURES

	24 Hour me Delay	Sliding Hinge	ComfortLift*	Removable Cutlery Drawer	ProC	_	AirDry	XXL XXL XXL Interior
			TimeSaver Function	GlassCare Package	24 H Time I	Jour	Light Beam	
PROGRAMMES – 5			PROGRAMM	IES – 10				
Auto 45° – 70°			Auto 45° – 70)°		ProZ	one 50° – 65°	
Glass 45°			Glass 45°			Extra	a Silent 50°	
Eco			Eco			Rins	e & Hold	
Intensive 70°		Intensive 70° 90min 60°						
30min 60°			30min 60°			Mair	itenance Cycle	
Additional Features			Additional Fe	atures				
Auto load adjust: Sensor logic	Flexible basket		Auto load adju	ust: Sensor logic		Flexib	ole basket	
Auto off	XtraDry		Auto off			XtraD	Dry	
Glass care	Anti-flood protection	า	Glass care			Soft g	grips	
Soft spikes			Soft spikes			Anti-	flood protection	
Place Settings: 9	Water Usage: 9.9 ltr		Place Setting	s: 13		Colou	ır: Stainless Ste	el

Noise Level: 47dB Energy Rating: A+

Water Usage: 9.9 ltr **Appliance Dimensions** (HxWxD) in mm: 818 x 446 x 550



168

FREESTANDING DISHWASHERS







Freestanding ComfortLift® Dishwasher

FFE63806PM

KEY FEATURES



Place Settings: 13 Noise Level: 44dB Energy Rating: A++ Water Usage: 11 ltr

Colour: Stainless Stee Appliance Dimensions (HxWxD) in mm: 850 x 596 x 610

Also Available: FFE63806PW – White

FREESTANDING DISHWASHERS







KEY FEATURES

اnteriorLight	Deluxe Interior	Removable Cutlery Drawer	ProClean	AirDry
XXL Interior	TimeSaver Function	24 Hour Time Delay	GlassCare Package	

PROGRAMMES - 8

Auto 45° – 70°	ProZone 50° – 65°
Glass 45°	Extra Silent 50°
Eco	Rinse & Hold
Intensive 70°	
30min 60°	

Additional Features

Auto load adjust: Sensor logic	Flexible basket
Auto off	XtraDry
Glass care	Soft grips
Soft spikes	Anti-flood protection
Place Settings: 15	Colour: Stainless Steel
Noise Level: 42dB	Appliance Dimensions
Energy Rating: A+++	(HxWxD) in mm:
	850 x 596 x 610





Freestanding 15 Place Setting Dishwasher with Superior Cleaning and Drying FFE63700PM

KEY FEATURES



PROGRAMMES - 7

Auto 45° – 70°	ProZone 50° – 65°
Glass 45°	Extra Silent 50°
Eco	
Intensive 70°	
30min 60°	

Water Usage: 11 ltr	850 x 596 x 610
Energy Rating: A+++	(HxWxD) in mm:
Noise Level: 44dB	Appliance Dimensions
Place Settings: 15	Colour: Stainless Steel
Soft spikes	Anti-flood protection
Glass care	Soft grips
Auto off	XtraDry
Auto load adjust: Sensor logic	Flexible basket





Freestanding Dishwasher with Superior Cleaning and Drying FFE62620PW

KEY FEATURES

ProClean ClassCare Package	AirDry	XXL Inte	ノ	TimeSaver Function	24 Hour Time Delay
Auto 45° – 70°			Extra	Silent 50°	
Glass 45°					
Eco					
Intensive 70°					

Additional Features

30min 60°

Noise Level: 44dB Energy Rating: A++ Water Usage: 10.5 ltr	Appliance Dimensions (HxWxD) in mm: 850 x 596 x 610	
Place Settings: 13	Colour: White	
Soft spikes	Anti-flood protection	
Glass care	Soft grips	
Auto off	XtraDry	
Auto load adjust: Sensor logic	Flexible basket	

Also Available: FFE62620PM – Stainless Steel







Freestanding Dishwasher with 14 Place Settings FFB53940ZM

KEY FEATURES











24 Hour Time Delay

Removable Cutlery Drawer AirDry

TimeSaver Function



Satellite SprayArm



PROGRAMMES - 5

Auto 45° - 70°

Glass 45°

Eco

Intensive 70°

30min 60°

Additional Features

Auto load adjust: Sensor logic Auto off Glass care Soft spikes Flexible basket XtraDry Anti-flood protection

Place Settings: 14 Noise Level: 44dB Energy Rating: A+++ Water Usage: 10.5 ltr

Colour: Stainless Steel Appliance Dimensions (HxWxD) in mm: 850 x 600 x 625

Also available: FFB53940ZW - White

FREESTANDING DISHWASHERS



Freestanding Dishwasher with AirDry Technology FFB53600ZW

KEY FEATURES











with AirDry Technology FFB41600ZW

KEY FEATURES

PROGRAMMES - 4



PROGRAMMES - 5

Auto 45° – 70°
Glass 45°
Eco
Intensive 70°
30min 60°

Additional Features

Noise Level: 44dB Energy Rating: A+++ Water Usage: 9.9 ltr	Appliance Dimensions (HxWxD) in mm: 850 x 600 x 625
Place Settings: 13	Colour: White
Soft spikes	
Glass care	Anti-flood protection
Auto off	XtraDry
Auto load adjust: Sensor logic	Flexible basket

Auto 45° - 70° Eco Intensive 70° 30min 60°

Additional Features Auto load adjust: Sensor logic Anti-flood protection Auto off Flexible basket XtraDry Place Settings: 13 Noise Level: 47dB

Energy Rating: A+ Water Usage: 11 ltr

Colour: White **Appliance Dimensions** (HxWxD) in mm: 850 x 600 x 625

FREESTANDING SLIM DISHWASHER





Freestanding Slimline Dishwasher with Superior Cleaning and Drying FFB62400PW

KEY FEATURES

Water Usage: 9.9 ltr

FlexiSpray	AirDry	TimeSaver Function	GlassCare Package	24 Hour Time Delay
PROGRAMM	ES – 6			
Auto 45° – 70	o	Extra	a Silent 50°	

Auto 45° – 70°	Extra Silent 50°
Glass 45°	
Eco	
Intensive 70°	
30min 60°	

Noise Level: 45dB Energy Rating: A++	Appliance Dimensions (HxWxD) in mm:
Place Settings: 9	Colour: White
Soft spikes	
Glass care	Anti-flood protection
Auto off	XtraDry
Auto load adjust: Sensor logic	Flexible basket
Additional Features	

Also Available: FFB53600ZM – Steel

Dishwashers

LAUNDRY

Imagine putting your precious sweater in the washer. Imagine trusting a dryer with a silk dress.

We've not only imagined it, we've done it. Washed the black dress time after time. Dried a soft wool sweater over and over. Every time they emerge without shrinking or fading, still vibrant and soft. Because AEG has redefined what a washer and dryer are. Protectors of fabric. Defenders of colour. Guardians of fibres.

Unprecedented care for the life of your clothes. Imagine that.

IN THIS SECTION

Washing Machines
Tumble Dryers
Washer Dryers

178–191 192–201 202–207



DESIGNED WITH CARE.

Our unique, innovative design is more than a pretty face. It also conveys superior quality and technical advancement. For our new range, we increased the size of the door and porthole for ease of use and a modern look, and reinvented the control panel.











Premium Design

Inspired by the electric turbines manufactured at the AEG Turbine Factory in Berlin.

The positioning of the door handle at 2 o'clock makes it easy to open.



Easy to Use Control Panel

A simplified programme choice with only your 10 favourite and most often used programmes.



Complementary Design

AEG tumble dryers are designed to complement our washing machines and are available with stacking kits.

OUR WASHING MACHINE RANGE

Our washing machine range is structured into 4 series levels. As you go up the series, our washing machines step up in the level of fabric care, and include all the technologies from the series below.



	6000 SERIES
SoftWater Technology	
ÖKOMix Technology	
ProSteam® Technology	
ProSense® Technology	\oslash



7000 SERIES	8000 SERIES	9000 SERIES
		\odot
	\bigcirc	\bigotimes
\bigcirc	\bigcirc	\bigotimes
\oslash	\bigcirc	\oslash

NO FADING, WASH AFTER WASH.*




SoftWater Technology

Thanks to its SoftWater Technology, the 9000 series AEG washing machine is kinder to your clothes, keeping fabrics feeling soft and in-shape whilst also preserving colours and preventing fading.

All mains water contains minerals that can be harsh on fabrics. These AEG washing machines are the first in the world with SoftWater Technology to remove these impurities.


Available on 9000 series washing machines.

*Even after 50 washes, colours will keep their intensity and black won't fade to grey. Test for colourfastness performed on black polyester after 50 washing cycles at 30°C.



$30^{\circ}C = 60^{\circ}C$







Lower Temperatures

Detergents can work much more effectively at low temperatures, delivering 60°C cleaning performance at only 30°C.



Ion-Exchange Filtering System

The world's first washing machine with a built-in water filter which is regenerated by salt. The preservation of the elasticity and softness of fibres comes from removing minerals from the washing water so that they cannot stick to the fibres making them hard and stiff.



Better Detergent and Softener Activation

Because detergents and softeners work at maximum efficiency, SoftWater Technology allows a reduction of the detergent dosage, and therefore a significant cost saving.

EVERY FIBRE PROTECTED.



ÖKOMix Technology

In other washing machines, less than half of the fibres are reached by fabric softeners.

But not in an ÖKOMix washing machine. By blending detergent and softener with water before they enter the drum, ÖKOMix Technology dissolves them completely, activating them to their full potential so that every fibre is expertly protected.

The 8000 Series introduces the new ÖKOPower programme – a 59 minute washing programme that delivers fantastic results, whilst using the minimal amount of energy. Thanks to the ÖKOMix Technology, detergent is activated fully and cleaning starts immediately. With the ÖKOPower programme, you can load up to 5kg of laundry.

Available on 9000 and 8000 series washing machines.



The blue colour visualises the distribution of fabric softener on the garment.

CUTS THE CREASES BY ONE THIRD.*



Standard cottons programme without PlusSteam®.

ProSteam® Technology

Using the PlusSteam[®] option to end a washing cycle with steam, reduces creasing by up to 30%. You can also refresh clothes with a separate steam programme to remove unwanted odours from garments.

That means less time ironing, less dry cleaning, less wear and tear on fibres. Sharp results with a fraction of the usual effort.

Available on 9000, 8000 and 7000 series washing machines.

*Comparative test using a standard cottons programme without selecting the PlusSteam® option versus the same programme with the PlusSteam[®] option selected.

DESIGN & INNOVATION



183


CARES TWICE AS EFFECTIVELY.*




ProSense® Technology

Adjusts time, water and energy consumption to the size of the load, even if it is just a single shirt or your entire weekly wash. This is thanks to specific sensors that will intelligently control the cycle settings and take care that your clothes are only washed for the exact amount of time needed. This ensures that fabrics suffer less wear and tear, maintaining colour and texture for longer.

Available on 9000, 8000, 7000 and 6000 series washing machines.



Fibres show more wear and tear due to unnecessary over-washing



An optimised wash cycle results in less over-washing and less wear and tear.

AWARD WINNING QUALITY.



Woolmark

The Woolmark Apparel Care programme helps consumers identify quality laundry appliances that are approved by The Woolmark Company for use on woollen fabrics.

Woolmark Blue

It is the Woolmark Apparel Care certification of wool cycles that identifies a machine as safe in which to wash handwash only woollen fabrics.

Woolmark Green

The gentleness required is exactly the same as for Woolmark Blue, but the programme uses less energy and water, hence the symbolic green labelling.



Ariel and Lenor certified

Our washing machine range is certified by Ariel and Lenor for their efficient use of liquid detergent and fabric softener. Any machine with ÖKOMix Technology has received the premium certification by Ariel and Lenor. The certification guarantees that 90% of fabrics in a washing load are evenly covered with liquid fabric softener. AEG, Ariel and Lenor have partnered to provide you with their combined unique care expertise for fabrics.

Test institute: Ritex

Test fabric: Textile Interlok Multicolour Red-Blue-Black, Cotton 100% Load size: 2kg **Programme:** cotton 40°C



Quiet Mark

Quiet Mark is the international approval award programme that encourages companies worldwide to prioritise noise reduction within the design of everyday machines and appliances, and find solutions to noise problems.

"

AEG gives consumers the confidence to put woollen garments into a machine, which has been lacking for the last 30-40 years.

PETER ACKROYD The Woolmark Company



WASHING MACHINES

While conventional washing machines need high temperatures to activate detergents and clean properly, the SoftWater Technology in AEG 9000 Series washing machines purifies and softens water before it enters the drum.

Softer water, kinder to clothes

Because our advanced SoftWater Technology purifies and softens water before it enters the drum, detergents can work much more effectively at low temperatures, delivering 60°C cleaning performance at only 30°C. So colours will keep their intensity wash after wash, and black won't fade to grey.




9000 SERIES



9000 Series Washing Machine L9FEC966R

TECHNOLOGY

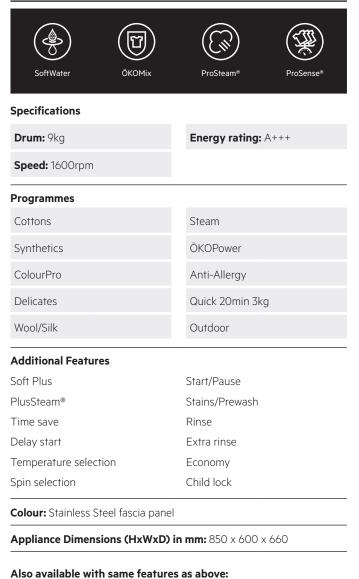

L9FEC946R – 1400rpm

8000 SERIES



8000 Series Washing Machine L8FEC966R

TECHNOLOGY

ÖKOMix ProStee	m* ProSense*	
Specifications		
Drum: 9kg	Energy rating: A+++	
Speed: 1600rpm		
Programmes		
Cottons	ÖKOPower	
Synthetics	Anti-Allergy	
Delicates	Quick 20min 3kg	
Wool/Silk	Outdoor	
Steam	Duvet	
Additional Features		
Soft Plus	Start/Pause	
PlusSteam [®]	Stains/Prewash	
Time save	Rinse	
Delay start	Extra rinse	
Temperature selection	Economy	
Spin selection	Child lock	
Colour: Stainless Steel fascia	panel	
Appliance Dimensions (HxWxD) in mm: 850 × 600 × 660		

Also available with same features as above: L8FEC946R – 9kg 1400rpm and L8FEC846R – 8kg 1400rpm











8000 Series Washing Machine L8FEE965R

TECHNOLOGY

ÖKOMix Pro	NSteam* ProSense*
Specifications	
Drum: 9kg	Energy rating: A+++
Speed: 1600rpm	
Programmes	
Cottons	ÖKOPower
Synthetics	Anti-Allergy
Delicates	Quick 20min 3kg
Wool/Silk	Outdoor
Steam	Duvet
Additional Features	
Soft Plus	Start/Pause
PlusSteam®	Stains/Prewash
Time save	Rinse
Delay start	Extra rinse
Temperature selection	Economy
Spin selection	Child lock
Colour: Silver fassia pape	

Colour: Silver fascia panel

Appliance Dimensions (HxWxD) in mm: $850 \times 600 \times 660$

Also available with same features as above: L8FEE945R - 9kg 1400rpm

WASHING MACHINES

7000 SERIES



7000 Series Washing Machine L7FEC146R

TECHNOLOGY

ProSteam® ProSense	•
Specifications	
Drum: 10kg	Energy rating: A+++
Speed: 1400rpm	
Programmes	
Cottons	Anti-Allergy
Synthetics	Quick 20min 3kg
Delicates	Outdoor
Wool/Silk	Duvet
Steam	Sport
Additional Features	
Soft Plus	Start/Pause
PlusSteam [®]	Stains/Prewash
Time save	Rinse
Delay start	Extra rinse
Temperature selection	Economy
Spin selection	Child lock
Colour: Stainless Steel fascia p	banel
Appliance Dimensions (HxW	/ xD) in mm: 850 x 600 x 660



7000 Series Washing Machine L7FEE965R

TECHNOLOGY

Q

ProSteam® ProSense®	
Specifications	
Drum: 9kg	Energy rating: A+++
Speed: 1600rpm	
Programmes	
Cottons	Anti-Allergy
Synthetics	Quick 20min 3kg
Delicates	Outdoor
Wool/Silk	Duvet
Steam	Sport
Additional Features	
Soft Plus	Start/Pause
PlusSteam [®]	Stains/Prewash
Time save	Rinse
Delay start	Extra rinse
Temperature selection	Economy
Spin selection	Child lock
Colour: Matte silver fascia panel	
Appliance Dimensions (HxWxD)	in mm: 850 x 600 x 660

Also available with same features as above:


L7FEE945R – 9kg 1400rpm, L7FEE865R – 8kg 1600rpm and L7FEE845R – 8Kg 1400rpm

6000 SERIES



6000 Series Washing Machine L6FBG142R

TECHNOLOGY

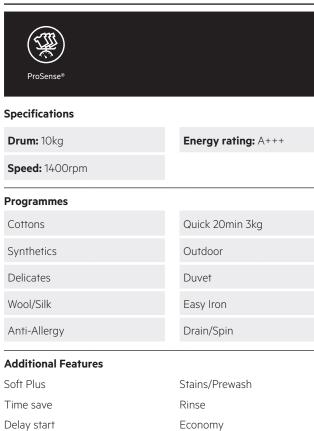

Soft Plus	Stains/Prewash
Time save	Rinse
Delay start	Economy
Temperature selection	Child lock
Spin selection	
Start/Pause	

Colour: White fascia panel

Appliance Dimensions (HxWxD) in mm: $850 \times 600 \times 660$

Also available with same features as above:

L6FBG942R – 9kg 1400rpm and L6FBG842R – 8kg 1400rpm



6000 Series Washing Machine L6FBI861N

TECHNOLOGY

ProSense*	
Specifications	
Drum: 8kg	Energy rating: A+++
Speed: 1600rpm	
Programmes	
Cottons	Wool/Silk
Cotton Eco	Quick 20min 3kg
Cotton 20°	Duvet
Synthetics	Easy Iron
Delicates	Drain/Spin
Additional Features	
Time save	Rinse
Delay start	Child lock
Temperature selection	
Spin selection	
Start/Pause	
Stains/Prewash	
Colour: White fascia panel	

Appliance Dimensions (HxWxD) in mm: $850 \times 600 \times 600$

Also available with same features as above: L6FBI841N – 8kg 1400rpm and L6FBI741N – 7kg 1400rpm

WASHING MACHINES



Built-In Washing Machine L7FE7261BI

TECHNOLOGY

ProSteam® ProSense®	
Specifications	
Drum: 7kg	Energy rating: A+++
Speed: 1200rpm	
Programmes	
Cottons	Wool/Silk
Cotton Eco	Denim
Synthetics	Outdoor
Delicates	Quick 20min 3kg
Anti-Allergy	Duvet
Steam	Sport
Spin/Drain	Rinse
Additional Features	
Soft Plus	Stains/Prewash
PlusSteam [®]	Delay start
Time save	Start/Pause
Temperature selection	Child lock
Spin selection	
Colour: Silver fascia panel	

Appliance Dimensions (HxWxD) in mm: $820 \times 596 \times 555$

Tips

Fully integrated machine to fit seamlessly into your kitchen.

Optimise Your Space

1

Create extra space in your laundry room with this stacking kit with an inclusive sliding shelf. It safely enables you to install your tumble dryer on top of the washing machine without any fixings. The sliding shelf provides easy loading and unloading as well as a practical place for folding your laundry.



OUR TUMBLE DRYER RANGE

Our tumble dryer range is structured into 3 series levels. As you go up the series levels, our tumble dryers step up the level of fabric care, and include all the technologies from the series below.



	6000 SERIE
AbsoluteCare® System	
SensiDry® Technology	
ProSense® Technology	\bigcirc



NO SHRINKAGE GUARANTEED.*



AbsoluteCare® System

Every fabric has specific characteristics and drying requirements. Tailored drying is needed to ensure they stay looking good for longer. The AbsoluteCare® System precisely controls the movement of the drum and the temperature of the drying for every type of fabric.

*Comparable with flat drying of wool.

Available on 8000 series tumble dryers.

Outdoor Programme

Our new Outdoor drying programme is even better than air drying for waterproofed, breathable fabrics. It uses just the right amount of heat to restore the performance of the water-repellent membrane in waterproof clothing. This ensures your performance fabrics continue to perform.

SAFE LOW TEMPERATURES.



AEG SensiDry® Technology

SensiDry[®] Technology dries at almost half the temperature of conventional tumble dryers – reducing damage and wear, and maintaining the texture of your fabrics.

Available on 8000 and 7000 series tumble dryers.



TRADITIONAL



ProSense® Technology

AEG ProSense® Technology protects clothes from the wear and tear caused by overdrying. Advanced humidity and temperature sensors adjust the drying time and energy consumption to every load size, ensuring clothes are perfectly dried whilst also saving time and energy.

SENSIDRY® TECHNOLOGY

TUMBLE DRYERS

Never dared to tumble dry wool, silk or outdoor garments before? Now you can tumble dry everything you wash. From the softest wool sweater to the business shirt you wear every day. Dryers with the AbsoluteCare® system. The tailored programming precisely controls the movement and temperature of the drying drum, so silks keep their shape and wrinkles are reduced.

Refresh Programme

Add the refresh option to your cottons and synthetics dry cycle to reduce creases and folds.

8000 SERIES



8000 Series Tumble Dryer T8DEC946R

TECHNOLOGY

AbsoluteCare® Sen	siDry® ProSense®
Specifications	
Drum: 9kg	Energy rating: A++
Programmes	
Cottons	Synthetics
Bedlinen	Outdoor
Easy Iron	Wool
Mixed	Duvet
Silk	Sports
Additional Features	
Refresh	Delay start
Anti-crease	Time drying
Dryness level	Start/Pause
Quiet mode	Child lock
Colour: Stainless Steel fas	cia panel
Appliance Dimensions (H	HxWxD) in mm: 850 x 600 x 665



8000 Series Tumble Dryer T8DEC846R

TECHNOLOGY

AbsoluteCare*	SensiDry*	ProSense*
Specifications		
Drum: 8kg		Energy rating: A++
Programmes		
Cottons		Synthetics
Bedlinen		Outdoor
Easy Iron		Wool
Mixed		Duvet
Silk		Sports
Additional Features		
Anti-crease		Time drying
Drying mode		Start/Pause
Dryness level		Child lock
Delay start		
Colour: Stainless Steel	fascia panel	
Appliance Dimension	s (HxWxD) i	n mm: 850 x 600 x 665







8000 Series Tumble Dryer T8DSC869C

TECHNOLOGY

AbsoluteCare®	SensiDry*	ProSense*
Specifications		
Drum: 8kg		Energy rating: A+++
Programmes		
Cottons		Synthetics
Bedlinen		Outdoor
Easy Iron		Wool
Mixed		Duvet
Silk		Sports
Additional Features		
Anti-crease		Time drying
Drying mode		Start/Pause
Dryness level		Child lock
Delay start		
Colour: Stainless Stee	l fascia panel	

Appliance Dimensions (HxWxD) in mm: 850 x 600 x 665

TUMBLE DRYERS

8000 SERIES



8000 Series Tumble Dryer T8DEE945R

TECHNOLOGY



Drum: 9kg	Energy rating: A++
Programmes	
Cottons	Synthetics
Bedlinen	Outdoor
Easy Iron	Wool
Mixed	Duvet
Silk	Sports
Additional Features	
Anti-crease	Delay start
Refresh	Time drying
Drying mode	Start/Pause
Dryness level	Child lock
Colour: Matte silver fascia panel	
Appliance Dimensions (HxWxD)) in mm: 850 x 600 x 665



8000 Series Tumble Dryer T8DBG842R

TECHNOLOGY


AbsoluteCare® Sens	iDry® ProSense®
Specifications	
Drum: 8kg	Energy rating: A++
Programmes	
Cottons	Synthetics
Bedlinen	Outdoor
Easy Iron	Wool
Mixed	Duvet
Silk	Sports
Additional Features	
Anti-crease	Time drying
Drying mode	Start/Pause
Dryness level	Child lock
Delay start	
Colour: White fascia panel	

7000 SERIES



7000 Series Tumble Dryer T7DBG832R

TECHNOLOGY



Programmes	
Cottons	Synthetics
Bedlinen	Wool
Easy Iron	Duvet
Mixed	Outdoor
Silk	Sports
Additional Features	
Anti-crease	Time drying
Refresh	Start/Pause

Colour: White fascia panel		
Delay start		
Dryness level	Child lock	
Refresh	Start/Pause	

Appliance Dimensions (HxWxD) in mm: 850 × 600 × 665

Also available with same features as above:

T8DEE845R – 8kg

Laundry

TUMBLE DRYERS

6000 SERIES



6000 Series Tumble Dryer T6DBG822N

TECHNOLOGY





Specifications		Specifications
Drum: 8kg	Energy rating: B	Drum: 7kg
Programmes		Programmes
Cottons	Mixed	Cottons
Cotton Eco	Synthetics	Cotton Eco
Delicates	Duvet	Delicates
Bedlinen	Sports	Bedlinen
Easy Iron	Jeans	Easy Iron
Additional Features		Additional Fea
Anti-crease	Time drying	Anti-crease
Delicate	Start/Pause	Delicate
Dryness level	Child lock	Dryness level
Delay start		Delay start
Colour: White fascia panel		Colour: White
Appliance Dimensions (HxWxD) in mm: 850 x 600 x 665		Appliance Dim



6000 Series Tumble Dryer T6DBG721N

TECHNOLOGY

ProSense®	
Specifications	
Drum: 7kg	Energy rating: B
Programmes	
Cottons	Mixed
Cotton Eco	Synthetics
Delicates	Duvet
Bedlinen	Sports
Easy Iron	Jeans
Additional Features	
Anti-crease	Time drying
Delicate	Start/Pause
Dryness level	Child lock
Delay start	
Colour: White fascia pane	sl



6000 Series Tumble Dryer T6DBG720N

TECHNOLOGY



Specifications

Drum: 7kg

Energy rating: B

Programmes	
Cottons	Mixed
Cotton Eco	Synthetics
Delicates	Duvet
Bedlinen	Sports
Easy Iron	Jeans

Additional Features	
Anti-crease	Time drying
Delicate	Start/Pause
Dryness level	Child lock
Delay start	

Colour: White fascia panel

Appliance Dimensions (HxWxD) in mm: 850 x 600 x 600





Tumble Dryer T65170AV

TECHNOLOGY



Specifications

Drum: 7	7kg
---------	-----

Programmes

Bedlinen

Easy Iron

Freshen Up

Jeans

Sports

Wool Refresh

Time 30

Additional Features

Delay start Delicate Sensitive

Anti-crease Buzzer Start/Pause

Energy rating: C

Cottons – Extra Dry

Cottons – Strong Dry

Cottons – Iron Dry

Synthetic – Extra Dry

Synthetics – Iron Dry

Synthetics – Cupboard Dry

Cottons – Cupboard Dry

Colour: White

Appliance Dimensions (HxWxD) in mm: $850 \times 600 \times 630$

OUR WASHER DRYER RANGE

We've taken the best technologies of our washing machines and tumble dryers and incorporated them into one solution, so you can wash and dry in one go.





WASHER DRYERS

With the same performance and technologies as two separate machines, you can wash and dry in one go.

We offer complete care for your woollens throughout the wash and dry cycle.



SensiDry®

SensiDry[®] Technology reduces the drying temperature by almost half (compared to a condenser washer dryer) – reducing damage and wear, and maintaining the texture of your fabrics.



DualSense®

DualSense® Technology tailors the temperature and motion of the drum to different fabrics. Everything from textured jackets to soft jumpers can be carefully washed, dried and cared for in one go.



ÖKOMix


The AEG ÖKOMix washer dryer is the only machine to pre-mix detergents and softeners separately in water before they enter the drum for the most thorough clean and the most even dry.

9000 SERIES



9000 Series Washer Dryer L9WEC169R

TECHNOLOGY

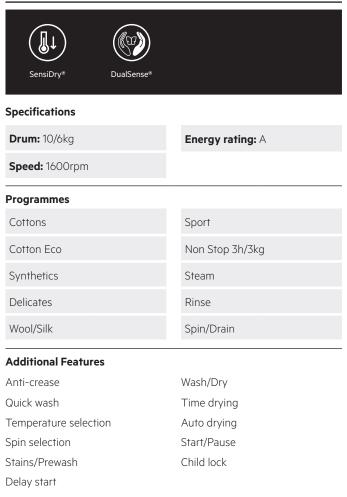

Colour: Stainless Steel fascia panel

Appliance Dimensions (HxWxD) in mm: $870 \times 600 \times 660^*$

 st Please note that this is higher than a standard freestanding kitchen appliance

8000 SERIES



8000 Series Washer Dryer L8WEC166R

TECHNOLOGY

ÖKOMix DualSense*	
Specifications	
Drum: 10/6kg	Energy rating: A
Speed: 1600rpm	
Programmes	
Cottons	Outdoor
Cotton Eco	Non Stop ÖKOPower
Synthetics	Steam
Delicates	Rinse
Wool/Handwash	Spin/Drain
Additional Features	
Anti-crease	Wash/Dry
Quick wash	Time drying
Temperature selection	Auto drying
Spin selection	Start/Pause
Stains/Prewash	Child lock
Delay start	
Colour: Stainless Steel fascia panel	

Appliance Dimensions (HxWxD) in mm: $850 \times 600 \times 660$

7000 SERIES







7000 Series Washer Dryer L7WEC166R

TECHNOLOGY

DualSense*	
Specifications	
Drum: 10/6kg	Energy rating: A
Speed: 1600rpm	
Programmes	
Cottons	Outdoor
Cotton Eco	Non Stop 60min
Synthetics	Steam
Delicates	Rinse
Wool/Handwash	Spin/Drain
Additional Features	
Anti-crease	Wash/Dry
Quick wash	Time drying
Temperature selection	Auto drying
Spin selection	Start/Pause
Stains/Prewash	Child lock
Delay start	

Colour: Stainless Steel fascia panel

Appliance Dimensions (HxWxD) in mm: $850 \times 600 \times 660$

WASHER DRYERS

7000 SERIES



7000 Series Washer Dryer L7WEE861R

TECHNOLOGY



DualSense®	
Specifications	
Drum: 8/6kg	Energy rating: A
Speed: 1600rpm	
Programmes	
Cottons	Outdoor
Cotton Eco	Anti-Allergy
Synthetics	Non Stop 60min
Delicates	Steam
Wool/Handwash	Rinse
Additional Features	
Quick wash	Start/Pause
Temperature selection	Child lock
Stains/Prewash	Spin selection
Delay start	
Wash/Dry	
Time drying	
Colour: White fascia panel	
Appliance Dimensions (HxW	xD) in mm: 850 x 600 x 660



7000 Series Washer Dryer L7WEG841R

TECHNOLOGY

DualSense*	
Specifications	
Drum: 8/4kg	Energy rating: A
Speed: 1600rpm	
Programmes	
Cottons	Outdoor
Cotton Eco	Spin/Drain
Synthetics	Non Stop 60min
Delicates	Steam
Wool/Handwash	Rinse
Additional Features	
Temperature selection	Start/Pause
Stains/Prewash	Spin selection
Delay start	Auto drying
Quick wash	Child lock
Wash/Dry	
Time drying	
Colour: White fascia panel	
Appliance Dimensions (HxW	xD) in mm: 850 x 600 x 576
Also available with same fea	tures as above:

Also available with same features as above: L7WBG741R – 1400rpm



Built-In Washer Dryer L7WE7631BI

TECHNOLOGY

DualSense® ProSense®	
Specifications	
Drum: 7/4kg	Energy rating: A
Speed: 1600rpm	
Programmes	
Cottons	Non Stop 60min
Cotton Eco	Denim
Synthetics	Outdoor
Delicates	Sportswear
Wool/Handwash	Anti-Allergy
Steam	Machine Clean
Spin/Drain	Rinse
Additional Features	
Temperature selection	Auto drying
Spin selection	Time drying
Time save	Start/Pause
Delay start	Child lock
Wash/Dry	Anti-crease
Prewash/extra rinse	

Colour: Silver fascia panel

Appliance Dimensions (HxWxD) in mm: 820 x 596 x 555


Laundry

SPECIFICATION TABLES



REERIGERATION

REFRIGERATION				
	SCE8186VTC	SCE8182VNC	SCE8182VTS	SCE8191VTS
Overview				
TwinTech®	•	•	•	•
NoFrost	•	•	•	•
LowFrost	•	•	•	
CustomFlex® LongFresh	•	-	-	
Soft Close Doors	•	•	•	•••••••••••••••••••••••••••••••••••••••
Multi Airflow Cooling	·····	•••••••••••••••••••••••••••••••••••••••	•••••••••••••••••••••••••••••••••••••••	
DynamicAir Technology	•	••••••	•	•
LCD Touch Display/Electronic Controls/		•••••••••••••••••••••••••••••••••••••••	•	
Mechanical Temperature Control	Electronic Touch	Electronic Touch	Electronic Touch	Simple Touch
LED Lighting	•	•	•	•
Coolmatic	•	•	•	•
Frostmatic	•	•	•	•
Holiday Mode	•	•	•	•
High Temperature Alarm	•	•	•	•
Door Open Alarm	•	• Dialy (D) () 11	• Dialy C.D. 111	Dialta C Da caralla
Door Opening Gross Capacity (ltr/cu.ft)	Right & Reversible	Right & Reversible	Right & Reversible	Right & Reversible
Net Capacity (Itr/cu.ft)	265 247	265 247	273 253	296 283
Fridge Features	247	247		205
Gross Capacity Fridge (ltr/cu.ft)	189	189	197	223
Net Capacity Fridge (Itr/cu.ft)	186	186	192	219
Defrost – Fridge	Auto	Auto	Auto	Auto
Glass Shelves	3	3	3	3
Flexi Shelf (Half Depth)	•	•	•	•
Fresh Box		•••••••••••••••••••••••••••••••••••••••	•••••••••••••••••••••••••••••••••••••••	•
Bottle Rack				
Large Telescopic Pull Out Salad Drawer				
Large Salad Drawer 2 Extra Deep 1/2 Width Salad Drawers	2 Half Width	2 Half Width	2 Half Width	
Full Width Recessed Salad Drawer with 2 Glass Lids				
Dairy Compartment with Lid	•	•	•	•
No. Full Width Door Shelves		•	•	
1/2 Width Sliding Door Shelf				•
Egg Tray	2 for 6 eggs	2 for 6 eggs	2 for 6 eggs	2 for 6 eggs
Freezer Features				
Gross Capacity Freezer (ltr/cu.ft)	76			73
Net Capacity Freezer (ltr/cu.ft)	61	61	61	64
Defrost – Freezer	Auto	Auto 3 Full Width	Auto	Auto
No. Full Width Drawers	3 Full Width	5 Full Wiain	3 Full Width	3 Full Width
Telescopic Freezer Drawers Product Dimensions				
Height (mm)	1769	1769	1772	1842
Width (mm)	556	556	540	540
Depth (mm)	549	549	549	552
Built-in Dimensions	577	577	577	
Built-in Height (mm)	1769	1769	1772	1842
Built-in Width (mm)	556	556	540	540
Built-in Depth (mm)	549	549	549	552
Door Fixing	BI DoD	BI DoD	BI Slide Door	BI Slide Door
Performance				
Annual Energy Consumption	120	226	228	307
Energy Efficiency Class	A+++	A++	A++	A+
Climate Class	SN-N-ST-T	SN-N-ST-T	SN-N-ST-T	SN-N-ST-T
Noise	39	39	39	
Freezing Capacity Power Cut Safe Rising Time	10 23	10 23		
Minimum Ambient Temperature	10		21 10	21 10
	10	10		



LCD Touch Display/Electronic Controls/	Simple Touch	
Mechanical Temperature Control	Simple rouch	
LED Lighting	•	
Coolmatic	•	
Frostmatic	•	
Holiday Mode	•	
High Temperature Alarm	•	
Door Open Alarm		
Door Opening	Right & Reversible	
Gross Capacity (ltr/cu.ft)	296	
Net Capacity (ltr/cu.ft)	283	
Fridge Features		_
Gross Capacity Fridge (ltr/cu.ft)	223	
Net Capacity Fridge (ltr/cu.ft)	219	
Defrost – Fridge	Auto	
Glass Shelves	3	
Flexi Shelf (Half Depth)	•	
Fresh Box	•	
Bottle Rack		
Large Telescopic Pull Out Salad Drawer		• • •
Large Salad Drawer		••••
2 Extra Deep 1/2 Width Salad Drawers		••••
Full Width Recessed Salad Drawer with 2 Glass Lids	•	••••
Dairy Compartment with Lid No. Full Width Door Shelves	•	••••
1/2 Width Sliding Door Shelf	•	
	2 for 6 eggs	••••
Egg Tray Freezer Features	2101 0 eggs	••••
Gross Capacity Freezer (ltr/cu.ft)	73	-
Net Capacity Freezer (Itr/cu.ft)	64	••••
Defrost – Freezer	Auto	••••
No. Full Width Drawers	3 Full Width	••••
Telescopic Freezer Drawers		••••
Product Dimensions		••••
Height (mm)	1842	-
Width (mm)		••••
	540	••••
Depth (mm)	552	
Built-in Dimensions	10/0	_
Built-in Height (mm)	1842	• • •
Built-in Width (mm)	540	••••
Built-in Depth (mm)	552	
Door Fixing	BI Slide Door	
Performance		_
Annual Energy Consumption	241	
Energy Efficiency Class	A++	
Climate Class	SN-N-ST-T	
Noise	39	
Freezing Capacity	8	
Power Cut Safe Rising Time	21	
Minimum Ambient Temperature	10	

Overview

TwinTech®

NoFrost LowFrost

CustomFlex® LongFresh Soft Close Doors

Multi Airflow Cooling DynamicAir Technology



	•••••••••••••••••••••••••••••••••••••••	
	•	
Electronic Touch	Electronic Touch	Electronic Touch
•	•	•
•	•	•
•	•	•
•	•	•
•	•	•
• light & Reversible	• Right & Reversible	• Right & Reversible
265	264	264
247	239	239
100	157	457
189 186	157 152	157 152
Auto	Auto	Auto
3	2	2
•	•	•
2 Half Width	2 Half Width	2 Half Width
•	•	•
•	•	•
2 for 6 eggs	• 2 for 6 eggs	2 for 6 eggs
76	107	107
61		87
Auto 3 Full Width	Auto 4 Full Width	Auto
3 Full Width		
	4 Full Width	Auto 4 Full Width
1769		
1769	1772	1772
1769 556 549		
556 549 1769	1772 540 549 1772	1772 540 549 1772
556 549 1769 556	1772 540 549 1772 540	1772 540 549 1772 540
556 549 1769 556 549	1772 540 549 1772 540 5/9	1772 540 549 1772 540 540
556 549 1769 556	1772 540 549 1772 540	1772 540 549 1772 540
556 549 1769 556 549 BI DoD 226	1772 540 549 1772 540 549 BI Slide Door 238	1772 540 549 1772 540 549 BI Slide Door 303
556 549 1769 556 549 BI DoD 226 A++	1772 540 549 1772 540 549 BI Slide Door 238 A++	1772 540 549 1772 540 549 BI Slide Door 303 A+
556 549 1769 556 549 BI DoD 226 A++ SN-N-ST-T	1772 540 549 1772 540 549 BI Slide Door 238 A++ SN-N-ST-T	1772 540 549 1772 540 549 BI Slide Door 303 A+ SN-N-ST-T
556 549 1769 556 549 BI DoD 226 A++ SN-N-ST-T 39	1772 540 549 1772 540 549 BI Slide Door 238 A++ SN-N-ST-T 39	1772 540 549 1772 540 549 BI Slide Door 303 A+ SN-N-ST-T 39
556 549 1769 556 549 BI DoD 226 A++ SN-N-ST-T	1772 540 549 1772 540 549 BI Slide Door 238 A++ SN-N-ST-T	1772 540 549 1772 540 549 BI Slide Door 303 A+ SN-N-ST-T

REFRIGERATION









	SCE8181VTS	SCB6181XLS	SCB6181VLS	SCB5142VLS
verview				
vinTech®	•		•••••••••••••••••••••••••••••••••••••••	
oFrost owFrost	-	•	•	•
ustomFlex®				
ongFresh		••••••	•••••••••••••••••••••••••••••••••••••••	•••••••••••••••••••••••••••••••••••••••
off Close Doors		•		
lulti Airflow Cooling		•	•	
ynamicAir Technology	•		•	
CD Touch Display/Electronic Controls/				•••••••••••••••••••••••••••••••••••••••
echanical Temperature Control	Electronic Touch	Simple Touch	Simple Touch	Mechanical Control
ED Lighting	•	•	•	•
polmatic	•			
ostmatic	•	•	•	
oliday Mode	•			•••••••••••••••••••••••••••••••••••••••
gh Temperature Alarm	•	•		
oor Open Alarm	•		•	
oor Opening	Right & Reversible	Right & Reversible	Right & Reversible	Right & Reversible
ross Capacity (ltr/cu.ft)	273	272	269	220
et Capacity (ltr/cu.ft)	253	268	266	217
idge Features				
ross Capacity Fridge (Itr/cu.ft)	197	199	163	163
et Capacity Fridge (ltr/cu.ft)	192	196	160	160
efrost – Fridge	Auto	Auto	Auto	Auto
lass Shelves	3	4	3	3
exi Shelf (Half Depth)	•	•••••••••••••••••••••••••••••••••••••••	•••••••••••••••••••••••••••••••••••••••	•••••••••••••••••••••••••••••••••••••••
resh Box				
ottle Rack arge Telescopic Pull Out Salad Drawer				
arge Salad Drawer				•••••••••••••••••••••••••••••••••••••••
Extra Deep 1/2 Width Salad Drawers	2 Half Width	2 Half Width	2 Half Width	2 Half Width
Ill Width Recessed Salad Drawer with 2 Glass Lids				
airy Compartment with Lid	•	•	•	•
o. Full Width Door Shelves		•		
2 Width Sliding Door Shelf	•		•	•
gg Tray	2 for 6 eggs	2 for 6 eggs	2 for 6 eggs	2 for 6 eggs
eezer Features				
oss Capacity Freezer (ltr/cu.ft)	76	73	106	57
et Capacity Freezer (Itr/cu.ft)	61	72	106	57
efrost – Freezer	Auto	Manual	Manual	Manual
p. Full Width Drawers	3 Full Width	3 Full Width	4 Full Width	2 Full Width
elescopic Freezer Drawers				
oduct Dimensions				
eight (mm)	1772	1772	1772	1441
idth (mm)	540	540	540	540
epth (mm)	549	549	549	549
uilt-in Dimensions				
uilt-in Height (mm)	1772	1772	1772	1441
uilt-in Width (mm)	540	540	540	540
ilt-in Depth (mm)	549	549	549	549
por Fixing	BI Slide Door	BI Slide Door	BI Slide Door	BI Slide Door
erformance				
nnual Energy Consumption	291	291	293	204
nergy Efficiency Class	A+	A+	A+	A++
imate Class	SN-N-ST-T	SN-N-ST-T	SN-N-ST	SN-N-ST-T
pise	40	36		35
eezing Capacity	10	4		
ower Cut Safe Rising Time	21			20
1inimum Ambient Temperature	10	10	10	10




ABE6821VNF

overview	
TwinTech®	
NoFrost	•
LowFrost	
CustomFlex®	
LongFresh	
Soft Close Doors	
Multi Airflow Cooling	
Duran and a Alia Talahara la ana	
LCD Touch Display/Electronic Controls/	Electronic
Mechanical Temperature Control	
LED Lighting	
Coolmatic	
Frostmatic	•
Holiday Mode	
High Temperature Alarm	•
Door Open Alarm	•
Door Opening	Right & Reversible
Gross Capacity (ltr/cu.ft)	86
Net Capacity (ltr/cu.ft)	85
Fridge Features	
Gross Capacity Fridge (ltr/cu.ft)	
Net Capacity Fridge (ltr/cu.ft)	
Defrost – Fridge	
Glass Shelves	
Flexi Shelf (Half Depth)	
Fresh Box	
Bottle Rack	
Large Telescopic Pull Out Salad Drawer	
Large Salad Drawer	•••••
2 Extra Deep 1/2 Width Salad Drawers	
Full Width Recessed Salad Drawer with 2 Glass Lids	
Dairy Compartment with Lid	
No. Full Width Door Shelves	
Egg Tray	
Freezer Features	
	8/
Gross Capacity Freezer (ltr/cu.ft)	86
Net Capacity Freezer (ltr/cu.ft)	
Defrost – Freezer	Auto
No. Full Width Drawers	3 Full Width
Telescopic Freezer Drawers	•
Product Dimensions	
Height (mm)	815
Width (mm)	596
Depth (mm)	550
Built-in Dimensions	
Built-in Height (mm)	815
Built-in Width (mm)	596
Built-in Depth (mm)	550
	BI UC DoD
Door Fixing Performance	5100 505
	101
Annual Energy Consumption	
Energy Efficiency Class	A+
Climate Class	SN-N-ST-T
Noise	42
Freezing Capacity	12
Power Cut Safe Rising Time	13
Minimum Ambient Temperature	10


Overview

NF	ABE6822VAF	ABB6821VAF	SFB5821VAF
	Electronic	Electronic	Mechanical
	•	•	
	•	•	
sible	Right & Reversible	Right & Reversible	Right & Reversible
	105 95	105 95	111 109
			111
			109
		•	Auto 2
			1 Full Width
			•
			• 1 for 6 eggs
	105	105	
	95 Manual	95 Manual	
h	3 Full Width	3 Full Width	•••••••••••••••••••••••••••••••••••••••
	815	815	815
	596	596	596
	550	550	550
	815	815	815
	596 550	<u>. 596</u> 550	<u> </u>
)	BI UC DoD	BI UC DoD	BI UC DoD
	147	187	172
	A++	A+	A+
I	SN-N-ST-T 40	SN-N-ST-T 38	SN-N-ST 38
	40 18	38 18	38 2.5
	29		
	10	10	10

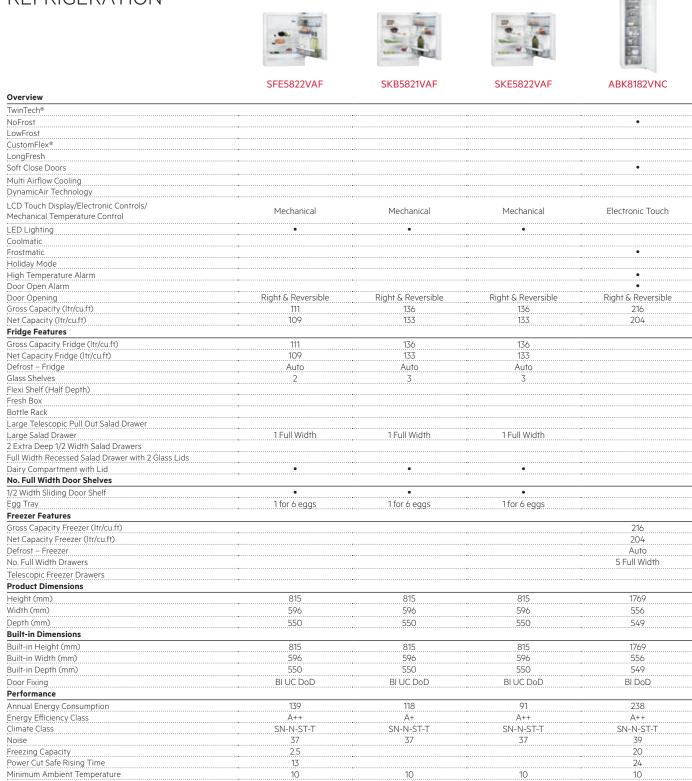

	Emp
	ABB8181VNC
Overview	
TwinTech®	
NoFrost	•
LowFrost	
CustomFlex®	
LongFresh	
Soft Close Doors	
Multi Airflow Cooling	
DynamicAir Technology	
LCD Touch Display/Electronic Controls/	Electronic Touch
Mechanical Temperature Control	
LED Lighting	
Coolmatic	
Frostmatic	•
Holiday Mode	
High Temperature Alarm	•
Door Open Alarm	•
Door Opening	Right & Reversibl
Gross Capacity (ltr/cu.ft)	216
Net Capacity (ltr/cu.ft)	204
Fridge Features	
Gross Capacity Fridge (Itr/cu.ft)	
Net Capacity Fridge (Itr/cu.ft)	
Defrost – Fridge	·····
Glass Shelves	
Flexi Shelf (Half Depth)	·····
Fresh Box	
Bottle Rack	
Large Telescopic Pull Out Salad Drawer	·····
Large Salad Drawer	
2 Extra Deep 1/2 Width Salad Drawers	
Full Width Recessed Salad Drawer with 2 Glass Lids	·····
Dairy Compartment with Lid	
No. Full Width Door Shelves	
1/2 Width Sliding Door Shelf	
Egg Tray	
Freezer Features	
Gross Capacity Freezer (ltr/cu.ft)	216
Net Capacity Freezer (ltr/cu.ft)	204
Defrost – Freezer	Auto
No. Full Width Drawers	5 Full Width
Telescopic Freezer Drawers	
Product Dimensions	
	17/0
Height (mm)	1769
Width (mm)	556
Depth (mm)	549
Built-in Dimensions	
Built-in Height (mm)	1769
Built-in Width (mm)	556
Built-in Depth (mm)	549
Door Fixing	BI DoD
Performance	5,505
	707
Annual Energy Consumption	
Energy Efficiency Class	
Climate Class	
Noise	39
Freezing Capacity	
Power Cut Safe Rising Time	
Minimum Ambient Temperature	10



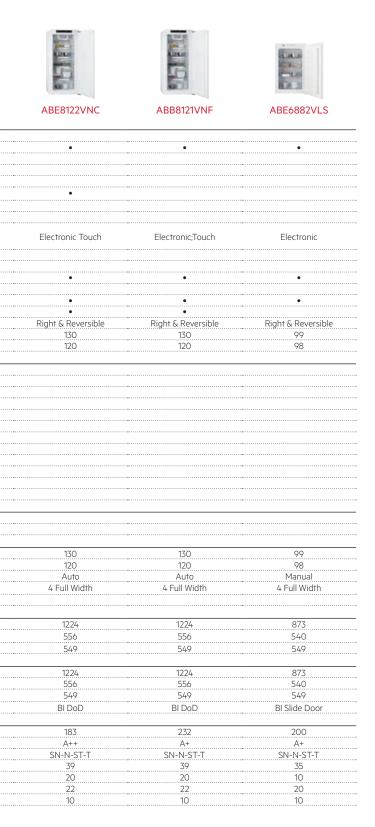







```
2466 B
```

149.40 T

	SKK8182VZC	SFE8182VDC	SKK8182VDC	SKB8181VDC
Verview				
winTech® IoFrost			•••••••••••••••••••••••••••••••••••••••	••••••
owFrost		•	•	••••••
ustomFlex®		•••••••••••••••••••••••••••••••••••••••	•••••••••••••••••••••••••••••••••••••••	•••••••
ongFresh	•			
oft Close Doors	٠	•	-	
Iulti Airflow Cooling			•	•
ynamicAir Technology				
CD Touch Display/Electronic Controls/	Electropic Touch	Flootropic Touch	Flootropic Touch	Electropic Touch
echanical Temperature Control	Electronic Touch	Electronic Touch	Electronic Touch	Electronic Touch
ED Lighting	•	•	•	•
polmatic	•		•	•
ostmatic				
oliday Mode		. .	•	•
gh Temperature Alarm		·····		
por Open Alarm	• Right & Reversible	Dight & Dovorsible	• Right & Reversible	• Right & Reversible
oor Opening oss Capacity (ltr/cu.ft)	Right & Reversible 298	Right & Reversible 289	314	Right & Reversible 314
et Capacity (Itr/cu.tt)	275	284	314	314
idge Features	215			
oss Capacity Fridge (ltr/cu.ft)	298	289	314	314
et Capacity Fridge (Itr/cu.ft)	275	284	310	310
efrost – Fridge	Auto	Auto	Auto	Auto
lass Shelves	3	4	4	4
exi Shelf (Half Depth)	•		•	•
esh Box		•	•	•
ottle Rack			.	
arge Telescopic Pull Out Salad Drawer	·····	<u>.</u>		••••••
arge Salad Drawer		·····		•••••••••••••••••••••••••••••••••••••••
Extra Deep 1/2 Width Salad Drawers				
ull Width Recessed Salad Drawer with 2 Glass Lids airy Compartment with Lid	•	•	•	•
o. Full Width Door Shelves				
2 Width Sliding Door Shelf	•		•	•
gg Tray	2 for 6 eggs	2 for 6 eggs	2 for 6 eggs	2 for 6 eggs
eezer Features				
ross Capacity Freezer (ltr/cu.ft)				
et Capacity Freezer (ltr/cu.ft)				•
efrost – Freezer				
o. Full Width Drawers				
elescopic Freezer Drawers	•	•	•	•
roduct Dimensions				
eight (mm)	1769	1772	1769	1769
idth (mm)	556	540	556	556
epth (mm)	549	549	549	549
uilt-in Dimensions				
uilt-in Height (mm)	1769	1772	1769	1769
uilt-in Width (mm)	556	540	556	556
uilt-in Depth (mm)	549	549	549	549
oor Fixing	BI DoD	BI Slide Door	BI DoD	BI DoD
erformance	470		44.1	
nnual Energy Consumption	130	215	114	142
nergy Efficiency Class	A++	A++	A++	A+
imate Class	SN-N-ST-T	SN-N-ST-T 35	SN-N-ST-T	SN-N-ST-T 35
oise reezing Capacity	37	3 3		
ower Cut Safe Rising Time			•	••••••
linimum Ambient Temperature	•••••	10		

SKE8122VAC
•••••
•••••
•
·····
•••••
•
•
•
•
Right & Reversibl
205
202
205
202
Auto
3
•
2 Half Width
•
•
2 for 6 eggs
1219
556
550
1219
556
550
D-D-D
BIDOD
107
103
A++ SN-N-ST-T
SN-N-SI-
75
35
35
35



	•		
	Electronic Touch	Mechanical	Mechanical
			•
	•	•	•
	•		•••••••••••••••••••••••••••••••••••••••
	•		
	•		•
9	• Right & Reversible	Right & Reversible	Right & Reversible
	205	125	143
	202	Right & Reversible 125 123	142
	205	125	143
	202	123	142
	Auto	123 Auto	Auto
	3	2	3
	•		•
		1 Full Width	1 Full Width
	2 Half Width	1 Full Width	1 Full Width
			•
	•	•	•
	•	•	•
	• 2 for 6 eggs	• 2 for 6 eggs	• 2 for 6 eggs
	•		•
	1219	873	873
	556	873 540	540
	550	549	549
	1219	873	873
	556	540	540
	556 550	549	
	BI DoD	540 549 BI Slide Door	540 549 Bl Slide Door
	131	151	96
	ادا + ۸	ا כו ++ λ	Λ ⁺⁺ ΑΩ
	A+ SN-N-ST-T 35	A++ SN-N-ST-T 38	A++ SN-N-ST-T 38
	ζ5	38	314-14-31-1
		2	50
	•	12 10	•
	10	10	10







Overview			
TwinTech®	•		
loFrost		•	•
_owFrost			•
CustomFlex®			•••••
LongFresh			· · · · · · · · · · · · · · · · · · ·
Soft Close Doors	•		•
Aulti Airflow Cooling		•	•
DynamicAir Technology			
			•••••
_CD Touch Display/Electronic Controls/	Electronic Touch	LCD touch	Electronic Touch
Mechanical Temperature Control			
_ED Lighting	•	•	•
Coolmatic	•	•	•
Frostmatic	•	•	•
Holiday Mode		•	•
High Temperature Alarm	•	•	•
Door Open Alarm	•	•	
			•••••
Door Opening	Left & Right	Side by Side	Left & Right
Gross Capacity (Itr/cu.ft)	680	608	630
Net Capacity (Itr/cu.ft)	541	549	536
Fridge Features			
Gross Capacity Fridge (Itr/cu.ft)	413	380	436
Net Capacity Fridge (Itr/cu.ft)	363	370	417
Defrost – Fridge	Auto	Auto	Auto
Glass Shelves	1	4	2
Flexi Shelf (Half Depth)	1	4	۷۲
		•	•••••
Fresh Box	•	•	
Bottle Rack			
_arge Telescopic Pull Out Salad Drawer		7 = 1110 11	
_arge Salad Drawer		3 Full Width	
2 Extra Deep 1/2 Width Salad Drawers	•		2 Half Width
Full Width Recessed Salad Drawer with 2 Glass Lids			· · · · · · · · · · · · · · · · · · ·
Dairy Compartment with Lid	•	•	•
No. Full Width Door Shelves			
I/2 Width Sliding Door Shelf	•		
Egg Tray	1 for 12 eggs	1 for 6 eggs	1 for 14 eggs
Freezer Features			
	267	228	194
Gross Capacity Freezer (Itr/cu.ft)	267 178	228 179	
Gross Capacity Freezer (ltr/cu.ft) Net Capacity Freezer (ltr/cu.ft)	178	179	119
Gross Capacity Freezer (Itr/cu.ft) Net Capacity Freezer (Itr/cu.ft) Defrost – Freezer	178 Auto	179 Auto	119 Auto
Gross Capacity Freezer (Itr/cu.ft) Net Capacity Freezer (Itr/cu.ft) Defrost – Freezer No. Full Width Drawers	178	179	119 Auto 2 Slide trays + 1 slide drawe
Gross Capacity Freezer (Itr/cu.ft) Net Capacity Freezer (Itr/cu.ft) Defrost – Freezer No. Full Width Drawers Felescopic Freezer Drawers	178 Auto	179 Auto	119
Gross Capacity Freezer (Itr/cu.ft) Net Capacity Freezer (Itr/cu.ft) Defrost – Freezer No. Full Width Drawers Felescopic Freezer Drawers Product Dimensions	178 Auto 2 Full width	179 Auto 2 Full width	119 Auto 2 Slide trays + 1 slide drawe
Gross Capacity Freezer (Itr/cu.ft) Net Capacity Freezer (Itr/cu.ft) Defrost – Freezer No. Full Width Drawers Telescopic Freezer Drawers Product Dimensions Height (mm)	178 Auto 2 Full width 1782	179 Auto 2 Full width 1860	119 Auto 2 Slide trays + 1 slide drawe • 1776
Gross Capacity Freezer (Itr/cu.ft) Net Capacity Freezer (Itr/cu.ft) Defrost – Freezer No. Full Width Drawers Telescopic Freezer Drawers Product Dimensions Height (mm) Width (mm)	178 Auto 2 Full width 1782 913	179 Auto 2 Full width 1860 1190	119 Auto 2 Slide trays + 1 slide drawe • 1776 912
Gross Capacity Freezer (Itr/cu.ft) Net Capacity Freezer (Itr/cu.ft) Defrost – Freezer No. Full Width Drawers Telescopic Freezer Drawers Product Dimensions Height (mm) Width (mm) Depth (mm)	178 Auto 2 Full width 1782	179 Auto 2 Full width 1860	119 Auto 2 Slide trays + 1 slide drawe • 1776
Gross Capacity Freezer (Itr/cu.ft) Net Capacity Freezer (Itr/cu.ft) Defrost – Freezer No. Full Width Drawers Felescopic Freezer Drawers Product Dimensions Height (mm) Width (mm) Depth (mm)	178 Auto 2 Full width 1782 913 746	179 Auto 2 Full width 1860 1190 623	119 Auto 2 Slide trays + 1 slide drawe • 1776 912 765
Gross Capacity Freezer (Itr/cu.ft) Net Capacity Freezer (Itr/cu.ft) Defrost – Freezer No. Full Width Drawers Felescopic Freezer Drawers Product Dimensions Height (mm) Depth (mm) Built-in Dimensions Built-in Height (mm)	178 Auto 2 Full width 1782 913	179 Auto 2 Full width 1860 1190	119 Auto 2 Slide trays + 1 slide drawe • 1776 912 765 1776
Gross Capacity Freezer (Itr/cu.ft) Net Capacity Freezer (Itr/cu.ft) Defrost – Freezer No. Full Width Drawers Felescopic Freezer Drawers Product Dimensions Height (mm) Depth (mm) Built-in Dimensions Built-in Height (mm)	178 Auto 2 Full width 1782 913 746	179 Auto 2 Full width 1860 1190 623	119 Auto 2 Slide trays + 1 slide drawe • 1776 912 765
Bross Capacity Freezer (Itr/cu.ft) Net Capacity Freezer (Itr/cu.ft) Defrost – Freezer No. Full Width Drawers Felescopic Freezer Drawers Product Dimensions Height (mm) Width (mm) Depth (mm) Built-in Dimensions Built-in Height (mm) Built-in Width (mm)	178 Auto 2 Full width 1782 913 746 1782	179 Auto 2 Full width 1860 1190 623 1860 1190 623	119 Auto 2 Slide trays + 1 slide drawe • 1776 912 765 1776
Sross Capacity Freezer (Itr/cu.ft) Net Capacity Freezer (Itr/cu.ft) Defrost – Freezer No. Full Width Drawers Felescopic Freezer Drawers Product Dimensions Height (mm) Width (mm) Depth (mm) Built-in Dimensions Built-in Height (mm) Built-in Depth (mm) Built-in Depth (mm)	178 Auto 2 Full width 1782 913 746 1782 913 746	179 Auto 2 Full width 1860 1190 623 1860 1190	119 Auto 2 Slide trays + 1 slide drawe • 1776 912 765 1776 912
Sross Capacity Freezer (Itr/cu.ft) Net Capacity Freezer (Itr/cu.ft) Defrost – Freezer No. Full Width Drawers Telescopic Freezer Drawers Product Dimensions Height (mm) Width (mm) Depth (mm) Built-in Dimensions Built-in Height (mm) Built-in Width (mm) Built-in Depth (mm) Door Fixing	178 Auto 2 Full width 1782 913 746 1782 913	179 Auto 2 Full width 1860 1190 623 1860 1190 623	119 Auto 2 Slide trays + 1 slide drawe • 1776 912 765 1776 912 765
Sross Capacity Freezer (Itr/cu.ft) Net Capacity Freezer (Itr/cu.ft) Defrost – Freezer No. Full Width Drawers Telescopic Freezer Drawers Product Dimensions Height (mm) Width (mm) Depth (mm) Built-in Dimensions Built-in Height (mm) Built-in Width (mm) Built-in Depth (mm) Door Fixing Performance	178 Auto 2 Full width 1782 913 746 1782 913 746 FS	179 Auto 2 Full width 1860 1190 623 1860 1190 623 FS	119 Auto 2 Slide trays + 1 slide draws • 1776 912 765 1776 912 765 FS
Sross Capacity Freezer (Itr/cu.ft) Net Capacity Freezer (Itr/cu.ft) Defrost – Freezer No. Full Width Drawers Felescopic Freezer Drawers Product Dimensions Height (mm) Width (mm) Depth (mm) Built-in Dimensions Built-in Height (mm) Built-in Depth (mm) Built-in Depth (mm) Door Fixing Performance Annual Energy Consumption	178 Auto 2 Full width 1782 913 746 1782 913 746 1782 913 746 FS 448	179 Auto 2 Full width 1860 1190 623 1860 1190 623 FS 467	119 Auto 2 Slide trays + 1 slide draws • 1776 912 765 1776 912 765 FS FS 410
Gross Capacity Freezer (Itr/cu.ft) Net Capacity Freezer (Itr/cu.ft) Defrost – Freezer No. Full Width Drawers Telescopic Freezer Drawers Product Dimensions Height (mm) Width (mm) Depth (mm) Built-in Dimensions Built-in Height (mm) Built-in Width (mm) Built-in Width (mm) Built-in Depth (mm) Door Fixing Performance Annual Energy Consumption Energy Efficiency Class	178 Auto 2 Full width 1782 913 746 1782 913 746 1782 913 746 FS 448 A+	179 Auto 2 Full width 1860 1190 623 1860 1190 623 FS 467 A+	119 Auto 2 Slide trays + 1 slide drawe • 1776 912 765 1776 912 765 FS FS 410 A+
Seross Capacity Freezer (Itr/cu.ft) Net Capacity Freezer (Itr/cu.ft) Defrost – Freezer No. Full Width Drawers Felescopic Freezer Drawers Product Dimensions Height (mm) Nidth (mm) Depth (mm) Built-in Dimensions Built-in Nidth (mm) Built-in Depth (mm) Door Fixing Performance Annual Energy Consumption Energy Efficiency Class Dimate Class	178 Auto 2 Full width 1782 913 746 1782 913 746 FS 913 746 FS 448 A+ SN-N-ST-T	179 Auto 2 Full width 1860 1190 623 1860 1190 623 FS 467 A+ SN-N-ST-T	119 Auto 2 Slide trays + 1 slide drawe • 1776 912 765 1776 912 765 FS 410 A+ SN-N-ST-T
Sross Capacity Freezer (Itr/cu.ft) Net Capacity Freezer (Itr/cu.ft) Defrost – Freezer No. Full Width Drawers Telescopic Freezer Drawers Product Dimensions Height (mm) Width (mm) Depth (mm) Built-in Dimensions Built-in Dimensions Built-in Neight (mm) Built-in Depth (mm) Door Fixing Performance Annual Energy Consumption Energy Efficiency Class Climate Class Noise	178 Auto 2 Full width 1782 913 746 1782 913 746 FS 448 A+ SN-N-ST-T 42	179 Auto 2 Full width 1860 1190 623 1860 1190 623 FS 467 A+ SN-N-ST-T 43	119 Auto 2 Slide trays + 1 slide drawe • 1776 912 765 1776 912 765 FS 410 A+ SN-N-ST-T 43
Gross Capacity Freezer (Itr/cu.ft) Net Capacity Freezer (Itr/cu.ft) Defrost – Freezer No. Full Width Drawers Telescopic Freezer Drawers Product Dimensions Height (mm) Width (mm) Built-in Dimensions Built-in Height (mm) Built-in Height (mm) Built-in Width (mm) Built-in Width (mm) Built-in Depth (mm) Door Fixing Performance Annual Energy Consumption Energy Efficiency Class Climate Class Noise Preezing Capacity Power Cut Safe Rising Time	178 Auto 2 Full width 1782 913 746 1782 913 746 FS 913 746 FS 448 A+ SN-N-ST-T	179 Auto 2 Full width 1860 1190 623 1860 1190 623 FS 467 A+ SN-N-ST-T	119 Auto 2 Slide trays + 1 slide drawe • 1776 912 765 1776 912 765 FS FS 410 A+ SN-N-ST-T



Overview	
TwinTech®	•
NoFrost	•
LowFrost	
CustomFlex®	•
LongFresh	
Soft Close Doors	
Multi Airflow Cooling	•
DynamicAir Technology	
LCD Touch Display/Electronic Controls/	
Mechanical Temperature Control	Electronic Touch
LED Lighting	•
Coolmatic	•
Frostmatic	•
Holiday Mode	•
High Temperature Alarm	
Door Open Alarm	
	R & Reversible by
Door Opening	Technical Service
Corres Corresting (Index 50)	
Gross Capacity (Itr/cu.ft)	370
Net Capacity (ltr/cu.ft)	341
Fridge Features	
Gross Capacity Fridge (ltr/cu.ft)	261
Net Capacity Fridge (Itr/cu.ft)	250
Defrost – Fridge	Auto
Glass Shelves	3
Flexi Shelf (Half Depth)	•
Fresh Box	
Bottle Rack	•
Large Telescopic Pull Out Salad Drawer	
Large Salad Drawer	
2 Extra Deep 1/2 Width Salad Drawers	
Full Width Recessed Salad Drawer with 2 Glass Lids	
Dairy Compartment with Lid	•
No. Full Width Door Shelves	
1/2 Width Sliding Door Shelf	•
Egg Tray	1 for 8 eggs
Freezer Features	
Gross Capacity Freezer (ltr/cu.ft)	109
Net Capacity Freezer (ltr/cu.ft)	91
Defrost – Freezer	Auto
No. Full Width Drawers	2 Full Width+1 Half Depth
Telescopic Freezer Drawers	21 di Wallin Indi Depin
Product Dimensions	
Height (mm)	2005
Width (mm)	
	595
Depth (mm)	647
Built-in Dimensions	
Built-in Height (mm)	2005
Built-in Width (mm)	595
Built-in Depth (mm)	647
Door Fixing	FS
Performance	
Annual Energy Consumption	248
	A++
Energy Efficiency Class	
	SN-N-ST-T
Climate Class	
Noise	43
Climate Class	43 4

Overview

RCB53724VW	RCB53324VX	RCB53324VW
•	•	•
•	•	•
•	•	•
Electronic Touch	Electronic Touch	Electronic Touch
•	•	•
•	•	•
•	•	•
R & Reversible by	R & Reversible by	R & Reversible by
Technical Service	Technical Service	Technical Service
370	332	332
341	305	305
261	223	223
250	214	214
Auto 3	Auto 2	Auto 2
•	•	•
•	•	•
•	•	•
• 1 for 8 eggs	• 1 for 8 eggs	• 1 for 8 eggs
109	109	109
91	91	91
Auto	Auto	Auto
2 Full Width+1 Half Depth	2 Full Width+1 Half Depth	2 Full Width+1 Half Depth
2005	1845	1845
595	595	595
	647	647
2005	1845	1845
595	595	595
647 FS	647 FS	647 FS
248	237	237
A++	A++	A++
SN-N-ST-T	SN-N-ST-T	SN-N-ST-T
43	43	43
4	4 20	4
18 10		20 10









	RCB53725VX	RCB53725VW	RCB53325VX	RCB53325VW
Overview				
īwinTech®	•	•	•	•
NoFrost	•	•	•	•
LowFrost				
CustomFlex®	•	•	•	•
ongFresh				
oft Close Doors				
Aulti Airflow Cooling	•	•	•	•
ynamicAir Technology				
CD Touch Display/Electronic Controls/	-			•
Aechanical Temperature Control	Electronic Touch	Electronic Touch	Electronic Touch	Electronic Touch
	•	•	-	•
ED Lighting				
Coolmatic	•	•	•	
rostmatic	•	•	•	•
łoliday Mode				<u>.</u>
ligh Temperature Alarm				
oor Open Alarm				
Door Opening	Right & Reversible	Right & Reversible	Right & Reversible	Right & Reversible
Gross Capacity (ltr/cu.ft)	370	370	332	332
Net Capacity (Itr/cu.ft)	341	341	305	305
Fridge Features				
Bross Capacity Fridge (Itr/cu.ft)	261	261	223	223
Net Capacity Fridge (Itr/cu.ft)	250	250	214	214
Defrost – Fridge	Auto	Auto	Auto	Auto
Glass Shelves	3	3	2	2
lexi Shelf (Half Depth)	•	•	•	•
resh Box		••••••	•	•
Bottle Rack	•	•	•	•
.arge Telescopic Pull Out Salad Drawer				
_arge Salad Drawer	•••••••	•••••••••••••••••••••••••••••••••••••••	•••••••••••••••••••••••••••••••••••••••	•••••••••••••••••••••••••••••••••••••••
2 Extra Deep 1/2 Width Salad Drawers				
Full Width Recessed Salad Drawer with 2 Glass Lids				
Dairy Compartment with Lid	•	•	•	•
	•			
No. Full Width Door Shelves				
I/2 Width Sliding Door Shelf	•	•	•	•
Egg Tray	1 for 8 eggs	1 for 8 eggs	1 for 8 eggs	1 for 8 eggs
Freezer Features				
Gross Capacity Freezer (ltr/cu.ft)	109	109	109	109
let Capacity Freezer (ltr/cu.ft)	91	91		
Defrost – Freezer	Auto	Auto	Auto	Auto
No. Full Width Drawers	2 Full Width+1 Half Depth	2 Full Width+1 Half Depth	2 Full Width+1 Half Depth	2 Full Width+1 Half Depth
Felescopic Freezer Drawers				
roduct Dimensions				
leight (mm)	2005	2005	1845	1845
Vidth (mm)	595	595	595	595
pepth (mm)	647	647	647	647
Built-in Dimensions	0.7	5.0		
	2005	2005	10/ 5	10/5
Built-in Height (mm)	2005	2005	1845	1845
Built-in Width (mm)	595	595	595	595
Built-in Depth (mm)	647	647	647	647
Door Fixing	FS	FS	FS	FS
Performance				
Annual Energy Consumption	248	248	237	237
nergy Efficiency Class	A++	A++	A++	A++
limate Class	SN-N-ST-T	SN-N-ST-T	SN-N-ST-T	SN-N-ST-T
ciinale Class	514 14 51 1			
	43	43	43	43
Voise	43		• • • • • • • • • • • • • • • • • • • •	43 4
Noise Freezing Capacity Jower Cut Safe Rising Time		43 4 20	43 4 20	43 4 20

Overview	RCB83724VX
TwinTech [®]	•
NoFrost	•
LowFrost	
CustomFlex® LongFresh	•
Soft Close Doors	
Multi Airflow Cooling	•
DynamicAir Technology	
LCD Touch Display/Electronic Controls/ Mechanical Temperature Control	Electronic Touch
LED Lighting	•
Coolmatic	•
Frostmatic	•
Holiday Mode High Temperature Alarm	<u>ــــــــــــــــــــــــــــــــــــ</u>
Door Open Alarm	•
Door Opening	Right & Reversible
Gross Capacity (ltr/cu.ft)	377
Net Capacity (ltr/cu.ft)	350
Fridge Features	
Gross Capacity Fridge (Itr/cu.ft)	266
Net Capacity Fridge (Itr/cu.ft)	258
Defrost – Fridge Glass Shelves	Auto 2
Flexi Shelf (Half Depth) Fresh Box	
Bottle Rack	•
Large Telescopic Pull Out Salad Drawer Large Salad Drawer	
2 Extra Deep 1/2 Width Salad Drawers	•••••••
Full Width Recessed Salad Drawer with 2 Glass Lids Dairy Compartment with Lid	•
No. Full Width Door Shelves	
1/2 Width Sliding Door Shelf	•
Egg Tray	1 for 8 eggs
Freezer Features	
Gross Capacity Freezer (ltr/cu.ft)	111
Net Capacity Freezer (Itr/cu.ft) Defrost – Freezer	92 Auto
	2 Full Width+1 Half De
No. Full Width Drawers	with motallic trim
Telescopic Freezer Drawers Product Dimensions	
Height (mm)	2000
Width (mm)	595
Depth (mm)	647
Built-in Dimensions	
Built-in Height (mm)	2000
Built-in Width (mm)	595
Built-in Depth (mm) Door Fixing	647 FS
Performance	1.5
Annual Energy Consumption	251
Energy Efficiency Class	A++
Climate Class	SN-N-ST-T
Noise	46
Freezing Capacity	10
Power Cut Safe Rising Time	20
Minimum Ambient Temperature	10



٢X	RCB83724VW	ATB8101VNX	ATB8101VNW
	•	•	•
	•		
ıch	Electronic Touch	Electronic	Electronic
	•		
	•	•	•
	•	•	•
ible	• Right & Reversible	Right & Reversible	Right & Reversible
	377 350	110 80	110
	350	80	92
	266		•••••••••••••••••••••••••••••••••••••••
	258 Auto		
	2		
	•		
		•••••••••••••••••••••••••••••••••••••••	
	•	•••••••••••••••••••••••••••••••••••••••	•••••••••••••••••••••••••••••••••••••••
	•		
	1 for 8 eggs		
	111	100	100
	92	80	80
Deeth	Auto	Auto	Auto
f Depth rim	2 Full Width+1 Half Depth with metallic trim	3 Full Width+1 Half Depth	3 Full Width+1 Half Depth
		•••••••••••••••••••••••••••••••••••••••	•••••••••••••••••••••••••••••••••••••••
	2000	850	850
	595	595	595
	647	635	635
	2000	850	850
	595 647	595 635	595 635
	FS	FS	FS
	•••••••••••••••••••••••••••••••••••••••		
		188	188
	251 A++	188 A+	188 A+
	251 A++ SN-N-ST-T	A+ SN-N-ST-T	A+ SN-N-ST-T
	251 A++ SN-N-ST-T 46	A+ SN-N-ST-T 45	A+ SN-N-ST-T 45
	251 A++ SN-N-ST-T	A+ SN-N-ST-T	A+ SN-N-ST-T

Overview

REFRIGERATION



ATB8112VAX









RTB8152VAX

AGE62526NX



20

10


10

TwinTech® NoFrost LowFrost CustomFlex® LongFresh Soft Close Doors Multi Airflow Cooling DynamicAir Technology LCD Touch Display/Electronic Controls/ Electronic Mechanical Mechanical Electronic Touch Mechanical Temperature Control LED Lighting Coolmatic Frostmatic Holiday Mode High Temperature Alarm Door Open Alarm Door Opening Right & Reversible Right & Reversible Right & Reversible Right & Reversible Gross Capacity (ltr/cu.ft) 110 155 155 250 152 Net Capacity (ltr/cu.ft) 92 152 229 Fridge Features Gross Capacity Fridge (ltr/cu.ft) 155 155 Net Capacity Fridge (ltr/cu.ft) 152 152 Defrost – Fridge Auto Auto Glass Shelves 2 2 Flexi Shelf (Half Depth) Fresh Box Bottle Rack Large Telescopic Pull Out Salad Drawer 1 Full Width 1 Full Width Large Salad Drawer 2 Extra Deep 1/2 Width Salad Drawers Full Width Recessed Salad Drawer with 2 Glass Lids Dairy Compartment with Lid No. Full Width Door Shelves 1/2 Width Sliding Door Shelf Egg Tray 2 for 6 eggs 2 for 6 eggs Freezer Features Gross Capacity Freezer (ltr/cu.ft) 250 110 92 229 Net Capacity Freezer (ltr/cu.ft) Manual Defrost – Freezer Auto 1 Full Width + 1 Maxi Drawer 2 Full Width + 3 Maxi Drawers No. Full Width Drawers + 1 Half Depth + 1 Half Depth Telescopic Freezer Drawers • Product Dimensions 850 595 850 595 850 595 Height (mm) 1850 Width (mm) 595 Depth (mm) 635 635 635 668 **Built-in Dimensions** 850 850 1850 850 Built-in Height (mm) Built-in Width (mm) 595 635 595 635 595 635 595 668 Built-in Depth (mm) Door Fixing FS FS FS FS Performance Annual Energy Consumption 145 94 94 229 Energy Efficiency Class A++ A++ A++ A++ Climate Class SN-N-ST-T SN-N-ST-T SN-N-ST-T SN-N-ST-T 38 42 38 Noise 39 Freezing Capacity 20 14

24

10

0

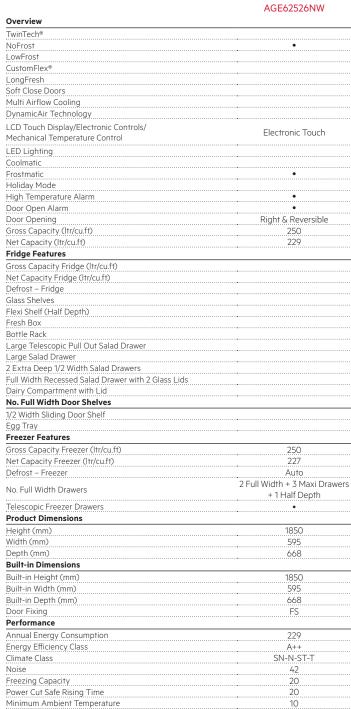



Power Cut Safe Rising Time

Minimum Ambient Temperature

	AGB62226NX	AGB62226NW	RKE64021DX
	•	•	
••••			
· · · • • · · · ·			•
••••			
	Electronic Touch	Electronic Touch	Electronic Touch
····			•
•••••••	•	•	-
	•	•	•
· · · · · · · · ·	•	•	•
	Right & Reversible	Right & Reversible	Right & Reversible
••••••	225	225 117	400 395
••••			3,3
			400
···· · ···			395
•••••••			Auto 4
•••••		•	
····			
••••••			•
· · · · · · · · ·			2 Full Width
••••			•
••••			1 for 6 eggs
	225	225	
••••••	177 Auto		
S			
	4 Full Width+1 Half Depth	4 Full Width+1 Half Depth	
	1544	1544	1850
	595	595	595
	668	668	668
	1544	1544	1850
· · · · · · · ·	595	595	595
···· · ···	668	668	668
	FS	FS	FS
	201	201	117
	A++	A++	A++
	SN-N-ST-T	SN-N-ST-T	SN-N-ST-T
····	43	43	39
	20	20	
	28	28	

Overview

REFRIGERATION





RKE64021DW

RKB63221DX

20

RKB63221DW

TwinTech®			
NoFrost			
LowFrost			
CustomFlex®			
LongFresh			·
Soft Close Doors			
Multi Airflow Cooling	•	•	•
DynamicAir Technology			
LCD Touch Display/Electronic Controls/			
Mechanical Temperature Control	Electronic Touch	Electronic Touch	Electronic Touch
	-		-
LED Lighting			•
Coolmatic	•	•	•
Frostmatic	······		
Holiday Mode	•		. <u>.</u>
High Temperature Alarm			
Door Open Alarm	•		
Door Opening	Right & Reversible	Right & Reversible	Right & Reversible
Gross Capacity (ltr/cu.ft)	400	317	317
Net Capacity (ltr/cu.ft)	395	314	314
Capacity			
Fridge Features			
Gross Capacity Fridge (Itr/cu.ft)	400	317	317
Net Capacity Fridge (ltr/cu.ft)	395	314	314
Defrost – Fridge	Auto	Auto	Auto
Glass Shelves	4	4	4
Flexi Shelf (Half Depth)	······		
Fresh Box		•••••••••••••••••••••••••••••••••••••••	
Bottle Rack	•		
	-	•	
Large Telescopic Pull Out Salad Drawer	2 Full Width	1 Full Width	1 F II . M. : Jak
Large Salad Drawer	2 Full Widin	I Full Widin	1 Full Width
2 Extra Deep 1/2 Width Salad Drawers	·····	•••••••••••••••••••••••••••••••••••••••	
Full Width Recessed Salad Drawer with 2 Glass Lids	•••••	•••••••••••••••••••••••••••••••••••••••	
Dairy Compartment with Lid	•	•	•
No. Full Width Door Shelves			
1/2 Width Sliding Door Shelf			
Egg Tray	1 for 6 eggs	1 for 6 eggs	1 for 6 eggs
Freezer Features			
Gross Capacity Freezer (ltr/cu.ft)			
Net Capacity Freezer (ltr/cu.ft)			
Defrost – Freezer			
No. Full Width Drawers			
Telescopic Freezer Drawers			
Product Dimensions		•••••••••••••••••••••••••••••••••••••••	
Height (mm)	1850	1544	1544
Height (http://www.com/actional/actio	595	595	
		•••••••••••••••••••••••••••••••••••••••	•••••••••••••••••••••••••••••••••••••••
Depth (mm)	668	668	668
Built-in Dimensions			
Built-in Height (mm)	1850	1544	1544
Built-in Width (mm)	595	595	595
Built-in Depth (mm)	668	668	668
Door Fixing	FS	FS	FS
Performance			
Annual Energy Consumption	117	109	109
Energy Efficiency Class	A++	A++	A++
Climate Class	SN-N-ST-T	SN-N-ST-T	SN-N-ST-T
Noise	39	39	39
Freezing Capacity			
Power Cut Safe Rising Time			
Minimum Ambient Temperature	10	10	10
		10	10



SWE66001DG

LowFrost CustomFlex® LongFresh Soft Close Doors Multi Airflow Cooling DynamicAir Technology LCD Touch Display/Electronic Controls/ Mechanical Temperature Control Electronic LED Lighting Coolmatic Frostmatic Holiday Mode High Temperature Alarm Door Open Alarm Door Opening Gross Capacity (ltr/cu.ft) Right & Reversible Net Capacity (ltr/cu.ft) 46 Bottles Capacity Fridge Features Gross Capacity Fridge (ltr/cu.ft) Net Capacity Fridge (ltr/cu.ft) 145 138 Defrost – Fridge Glass Shelves 6 Flexi Shelf (Half Depth) Fresh Box Bottle Rack Large Telescopic Pull Out Salad Drawer Large Salad Drawer 2 Extra Deep 1/2 Width Salad Drawers Full Width Recessed Salad Drawer with 2 Glass Lids Dairy Compartment with Lid No. Full Width Door Shelves 1/2 Width Sliding Door Shelf Egg Tray Freezer Features Gross Capacity Freezer (ltr/cu.ft) Net Capacity Freezer (ltr/cu.ft) Defrost – Freezer No. Full Width Drawers Telescopic Freezer Drawers **Product Dimensions** Height (mm) Width (mm) 820 595 565 Depth (mm) **Built-in Dimensions** Built-in Height (mm) 820 595 565 Built-in Width (mm) Built-in Depth (mm) Door Fixing BI Wide Door Performance Annual Energy Consumption Energy Efficiency Class 149 А N-ST Climate Class 39 Noise Freezing Capacity Power Cut Safe Rising Time Minimum Ambient Temperature 16

Overview

TwinTech® NoFrost



SWE63001DG







KWK884520M

Electronic	Electronic	Electronic
•	•	•
Right & Reversible	Right	Left
10.0	7 Bottles	24 Bottles
18 Bottles		
58 56	22 22	52
		49
6	6	2
820	870	455
294 571	148 526	595 566
820 294	870 148	450 560
294 571 BI Wide Door	148 526 Bl Wide Door	560 550 BI Drop Down
Bl Wide Door	BI Wide Door	
140	137	83 A++ ST 39
A N-ST 41	A N-ST	A++ ST
	41	39
16	16	16

Oven Features

SINGLE OVENS



S	K8	92	233	0	M	

Control Type	Command Wheel	Touch	Touch	Command Wheel
Illuminated Controls				
Menu Guided Cooking	Yes	Yes	Yes	Yes
Oven Capacity (Usable)	70	70	70	70
Number of Functions	21	24	24	18
Fast Heat Up	Yes	Yes	Yes	Yes
SoftMotion™ Soft Close Door	Yes	Yes	Yes	Yes
ully Programmable Timer	Yes	Yes	Yes	Yes
Core Temperature Sensor	Yes	Yes	Yes	Yes
loodLight™	Yes	Yes	Yes	Yes
iideLight	Yes	Yes	Yes	Yes
leaning	Steam	Steam	Steam	Steam
Oven Door Glazing	Four	Four	Four	Four
Cooling Fan	Yes	Yes	Yes	Yes
iteam	Yes	Yes	Yes	Yes
Accessories				
lumber of Shelves	Тwo	Two	Two	Two
elescopic Runners	Yes	Yes	Yes	Yes
1axiTray™	Yes	Yes	Yes	Yes
ull Width Grill/Meat Pan (with Trivet)	Yes	Yes	Yes	Yes
Perforated Baking Trays	Yes	Yes	Yes	Yes
Patisserie Tray	Yes	Yes	Yes	•••••••••••••••••••••••••••••••••••••••
Dimensions				
Appliance Dimensions				
leight (mm)	594	594	594	594
Vidth (mm)	595	595	595	595
Depth (mm)	567	567	567	567
Aperture Dimensions			-	
leight (mm)	590	590	590	590
Vidth (mm)	560	560	560	560
Depth (mm)	550	550	550	550
Performance				
)ven Temperature Range (°C)	30°C-230°C	30°C-230°C	30°C-230°C	30°C-230°C
nergy Efficiency Class	A++	A+	A+	A+
nergy Efficiency Class in Mode Static/Fan	Fan	Fan	Fan	Fan
nergy Consumption Fan (kWh)	0.52	0.68	0.68	0.68
inergy Consumption Static (kWh)	0.99	0.89	0.89	0.99
argest Baking Sheet Surface Area	1424	1424	1424	1424
Connected Load (W)	3200	3500	3500	3500
use Rating (A)	16	16		16

Control Type	
Illuminated Controls	
Menu Guided Cooking	
Oven Capacity (Usable)	
Number of Functions	
Fast Heat Up	
SOTIMOTION SOTI Close Door	
Fully Programmable Timer	
Core Temperature Sensor	
FloodLight™	
SideLight	
Cleaning	
Oven Door Glazing	
Cooling Fan	
Steam	
Accessories	
Number of Shelves	
Telescopic Runners	
MaxiTray™	
Full Width Grill/Meat Pan (wit	th Trivet)
Perforated Baking Trays	
Patisserie Tray	
Dimensions	
Appliance Dimensions	
Height (mm)	
Width (mm)	
Depth (mm)	
Aperture Dimensions	
Width (mm)	
Depth (mm)	
Performance	
Oven Temperature Range (°C)
Energy Efficiency Class	
Energy Efficiency Class Energy Efficiency Class in Mo	de Static/Fan
Energy Efficiency Class in Mo	
Energy Efficiency Class in Mo Energy Consumption Fan (kW	Vh)
Energy Efficiency Class in Mo Energy Consumption Fan (kW Energy Consumption Static (k	vh) kWh)
Energy Efficiency Class in Mo Energy Consumption Fan (kW Energy Consumption Static (k Largest Baking Sheet Surface	Vh)

BSK782320M	BSK774320M	BSK574221M
Touch	Touch	Retractable
Yes	Yes	
70		71
17	18	9 Yes
Yes	Yes	Yes
Steam	Steam	Steam
Four	Four	Four
		FOUI
Yes	Yes	Yes
Yes	Yes	Yes
Two	Two	Тwo
	Yes	Yes
Yes	Yes	Yes
Yes	Yes	Yes
Yes		
594	594	594
595	595	596
567	567	568
590	590	600
560	560	560
550	550	550
30°C-230°C	30°C-300°C	30°C-300°C
		30 C-300 C
A+	A+	A+
Fan	Fan	Fan
0.68	0.69	0.69
0.99	0.99	0.89
1424	1424	1424
3500	3500	3380
16	16	16
	······································	

SINGLE OVENS





BPK742320M

BPK744L21M / BPK744R21M

BPK742320B





BPK642020M

Control Type	Command Wheel	Touch	Touch	Touch
lluminated Controls		No		No
Menu Guided Cooking		Yes	Yes	Yes
)ven Capacity (Usable)	71	71	71	
Number of Functions	13	17	21	17
Fast Heat Up	Yes	Yes	Yes	Yes
SoftMotion™ Soft Close Door	Yes	Yes	-	Yes
Fully Programmable Timer	Yes	Yes	Yes	Yes
Core Temperature Sensor	Yes	Yes	Yes	Yes
loodLight™	Yes	Yes	Yes	Yes
ideLight	Yes	Yes	Yes	Yes
Cleaning	Pyrolytic	Pyrolytic	Pyrolytic	Pyrolytic
Oven Door Glazing	Four	Four	Four	Four
Cooling Fan	Yes	Yes	Yes	Yes
Steam				••••••
Accessories				
Number of Shelves	Two	Two	Two	Two
Felescopic Runners		Yes		Yes
∕laxiTray™	Yes	Yes	Yes	Yes
-ull Width Grill/Meat Pan (with Trivet)	Yes	Yes	Yes	Yes
Perforated Baking Trays				
Patisserie Tray				
Dimensions				
Appliance Dimensions			-	
Height (mm)	594	594	594	594
Vidth (mm)	595	595	594	595
Depth (mm)	567	567	568	567
Aperture Dimensions				
Height (mm)	590	590	600	590
Vidth (mm)	560	560	560	560
Depth (mm)	550	550	550	550
Performance				
Oven Temperature Range (°C)	30°C-300°C	30°C-300°C	30°C-300°C	30°C-300°C
Energy Efficiency Class	A+	A+	A+	A+
Energy Efficiency Class in Mode Static/Fan	Fan	Fan	Fan	Fan
Energy Consumption Fan (kWh)	0.69	0.69	0.69	0.69
nergy Consumption Static (kWh)	0.99	0.99	0.93	0.99
_argest Baking Sheet Surface Area	1424	1424	1424	1424
Connected Load (W)	3500	3500	3480	3500
Fuse Rating (A)	16	16	16	16

Control Type	Touch
Illuminated Controls	
Menu Guided Cooking	Yes
Oven Capacity (Usable)	71
Number of Functions	9
Fast Heat Up	Yes
SoftMotion™ Soft Close Door	Yes
Fully Programmable Timer	Yes
Core Temperature Sensor	Yes
FloodLight™	Yes
SideLight	Yes
Cleaning	Pyrolytic
Oven Door Glazing	Four
Cooling Fan	Yes
Steam	
Accessories	
Number of Shelves	Two
Telescopic Runners	
MaxiTray™	Yes
Full Width Grill/Meat Pan (with Trivet)	Yes
Perforated Baking Trays	
Patisserie Tray	
Dimensions	
Appliance Dimensions	
Height (mm)	594
Width (mm)	595
Depth (mm)	567
Aperture Dimensions	
Height (mm)	590
Width (mm)	560
Depth (mm)	550
Performance	
Oven Temperature Range (°C)	30°C-300°C
Energy Efficiency Class	A+
Energy Efficiency Class in Mode Static/Fan	Fan
Energy Consumption Fan (kWh)	1.00
Energy Consumption Static (kWh)	1.00
Lifergy consumption static (kwit)	
Largest Baking Sheet Surface Area	1418
	1418 3000

BPK552220M / BPK552220W / BPE552220B	BPK351020M	BCK452210M
Retractable	Retractable	Retractable
		•••••••
71	71	71
71 10	10	71 9
Yes	Yes	
Yes		Yes
		ies V
Yes	Yes	Yes
Yes	Yes	Yes
Yes		Yes
Yes	Yes	Yes
Pyrolytic	Pyrolytic	Catalytic
	i yioiyiic	
Three	Four	Three
Yes	Yes	Yes
Two	Two	Two
100	TWO	
Voc	Voc	Vac
Yes	Yes	Yes
Yes	Yes	Yes
		••••••
594	594	594
594	595	595
		567
567	567	
		590
590	590	590
560	560	560
550	550	550
•		
30°C-300°C	30°C-300°C	50°C-275°C
A+	A+	Α
Fan	Fan	Fan
0.69	0.69	0.88
0.99	0.99	0.99
1418	1418	1418
3200	3200	3200
16	16	16

SINGLE OVENS



BEK351010M / BEB351010W / BEB351010B

Oven Features	
Control Type	Retractable
Illuminated Controls	······
Menu Guided Cooking	
Oven Capacity (Usable)	
Number of Functions	9
Fast Heat Up	Yes
SoftMotion™ Soft Close Door	
Fully Programmable Timer	Yes
Core Temperature Sensor	Yes
FloodLight™	
SideLight	Yes
Cleaning	•
Oven Door Glazing	Three
Cooling Fan	Yes
Steam	
Accessories	
Number of Shelves	Two
Telescopic Runners	Yes
MaxiTray™	•
- Full Width Grill/Meat Pan (with Trivet)	Yes
Perforated Baking Trays	•
Patisserie Tray	······
Dimensions	
Appliance Dimensions	
Height (mm)	594
Width (mm)	595
Depth (mm)	567
Aperture Dimensions	
Height (mm)	590
Width (mm)	560
Depth (mm)	550
Performance	330
Dven Temperature Range (°C)	30°C-300°C
Energy Efficiency Class	30 C-300 C
Energy Efficiency Class in Mode Static/Fan	Fan
	· · · · · · · · · · · · · · · · · · ·
Energy Consumption Fan (kWh)	0.99
Energy Consumption Static (kWh)	0.88
Largest Baking Sheet Surface Area	1418
Connected Load (W)	3200
Fuse Rating (A)	

DOUBLE OVENS



DCK731110M

T=Top/B=Bottom	
Control Type	Touch
Oven Capacity (Usable)	39/61
Number of Cooking Functions	8/10
Fully Programmable Timer	Yes
Cleaning	Catalytic
Oven Doors Glazing	3/3
Lights	1/1
Cooling Fan	Yes
Accessories	
Number of Shelves	2/2
Telescopic Runners	Yes
Full Width Grill/Meat Pan (with Trivet)	Yes/Yes
Dimensions	
Appliance Dimensions	
Height (mm)	888
Width (mm)	594
Depth (mm)	548
Aperture Dimensions	
Height (mm)	875
Width (mm)	560
Depth (mm)	550
Performance	
Energy Efficiency Class	A/A
Energy Efficiency Class in Mode Static/Fan	Fan/Fan
Energy Consumption Fan (kWh)	0.79/0.82
Cook Time Standard Load Fan (Min)	49/49
Energy Consumption Static (kWh)	0.89/0.89
Cook Time Standard Load Static (Min)	52/52
Largest Baking Sheet Surface Area (cm²)	1175
Connected Load (W)	5800
Fuse Rating (A)	30



DCK431110M



DCB331010M



DEK431010M

Retractable	Retractable	Retractable
43/68	43/68	40/64
6/8	2/6	6/2
Yes	Yes	Yes
Catalytic	Catalytic	Enamel
2/2	2/2	2/2
1/1	1/1	1/1
Yes	Yes	Yes
1/2 Yes	1/2	1/2
-/Yes	–/Yes	–/Yes
888	888	888
594	594	
548	548	548
875	875	875
560	560	
550	550	550
A/A	A/A	A/A
Static/Fan	Static/Fan	Static/Fan
N/A/0.86	N/A/0.86	N/A/0.81
NA/44	NA/43	NA/46
0.78/0.86	0.78/N/A	0.78/N/A
48/45	52/NA	49/NA
1175	1175	1175
5100	4100	4100
30	30	30

DOUBLE OVENS



DUK731110M







DEE431010B

DUK431110M

	2221010102	5250010111	2010/011/011	
Oven Features				
T=Top/B=Bottom				
Control Type	Retractable	Retractable	Touch	Retractable
Oven Capacity (Usable)	43/68	43/68	39/46	40/46
Number of Cooking Functions	6/2	2/6	8/10	5/5
Fully Programmable Timer	Yes	Yes	Yes	Yes
Cleaning	Enamel	Enamel	Catalytic	Catalytic
Oven Doors Glazing	2/2	2/2	3/3	2/2
Lights	1/1	1/1	1/1	1/1
Cooling Fan	Yes	Yes	Yes	Yes
Accessories				
Number of Shelves	1/2	1/2	1/2	1/2
Telescopic Runners			Yes	Yes
Full Width Grill/Meat Pan (with Trivet)	–/Yes	–/Yes	–/Yes	–/Yes
Dimensions			-	
Appliance Dimensions				
Height (mm)	888	888	715	715
Width (mm)	594	594	594	594
Depth (mm)	548	548	548	548
Aperture Dimensions				
Height (mm)	875	875	870	870
Width (mm)	560	560	600	600
Depth (mm)	550	550	550	550
Performance				
Energy Efficiency Class	A/A	A/A	A/A	A/A
Energy Efficiency Class in Mode Static/Fan	Static/Fan	Static/Fan	Fan/Fan	Static/Fan
Energy Consumption Fan (kWh)	N/A/0.79	N/A/0.82	0.79/0.79	0.79/0.79
Cook Time Standard Load Fan (Min)	NA/40	NA/44	49/48	NA/40
Energy Consumption Static (kWh)	0.78/N/A	0.86/N/A	0.85/0.75	0.78/N/A
Cook Time Standard Load Static (Min)	45/NA	49/NA	53/50	45/NA
Largest Baking Sheet Surface Area (cm²)	1175	1175	1175	1175
Connected Load (W)	4100	4100	5900	4300
Fuse Rating (A)	30	30	30	30



DUB331110M


T=Top/B=Bottom Retractable Control Type Oven Capacity (Usable) Number of Cooking Functions Fully Programmable Timer 40/46 2/6 Yes Cleaning Oven Doors Glazing Catalytic 2/2 1/1 Lights Cooling Fan Yes Accessories 1/2 Number of Shelves Telescopic Runners Full Width Grill/Meat Pan (with Trivet) –/Yes Dimensions Appliance Dimensions 715 Height (mm) Width (mm) 594 Depth (mm) 548 Aperture Dimensions 870 Height (mm) Width (mm) 600 Depth (mm) 550 Performance Energy Efficiency Class A/A Energy Efficiency Class in Mode Static/Fan Static/Fan Energy Consumption Fan (kWh) N/A/0.79 Cook Time Standard Load Fan (Min) NA/46 Energy Consumption Static (kWh) 0.78/N/A Cook Time Standard Load Static (Min) 49/NA Largest Baking Sheet Surface Area (cm²) 1175 4100 Connected Load (W) Fuse Rating (A) 30

Oven Features

233

COMBI OVENS



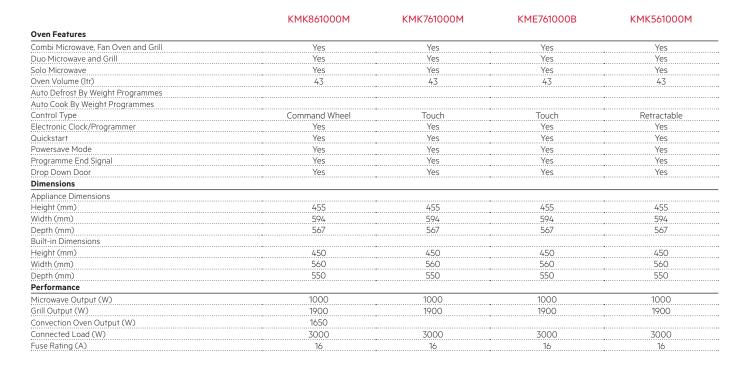



KMK721000M

Combi Microwave, Fan Oven and Grill	
Duo Microwave and Grill	Yes
Solo Microwave	Yes
Oven Volume (Itr)	43
Auto Defrost By Weight Programmes	
Auto Cook By Weight Programmes	
Control Type	Touch
Electronic Clock/Programmer	Yes
Quickstart	Yes
Powersave Mode	Yes
Programme End Signal	Yes
Drop Down Door	Yes
Dimensions	
Appliance Dimensions	
Height (mm)	455
Width (mm)	594
Depth (mm)	567
Built-in Dimensions	
Height (mm)	450
Width (mm)	560
Depth (mm)	550
Performance	
Microwave Output (W)	1000
Grill Output (W)	1900
Convection Oven Output (W)	
Connected Load (W)	2000
Fuse Rating (A)	16

COMPACT OVENS

Oven Festures



KSK892220M

Oven Features	
Digital Touch Controls	Command Wheel
Functions	25
Digital Temperature Control	Yes
Fully Programmable Electronic Timer	Yes
Oven Door Glazing	Four
Cleaning	Enamel
Cooling Fan	Yes
Steam	Yes
Volume (Usable)	43
Accessories	
Number of Shelves	One
Grill/Meat Pan	Yes
Dimensions	
Appliance Dimensions	
Height (mm)	455
Width (mm)	594
Depth (mm)	567
Aperture Dimensions	
Height (mm)	450
Width (mm)	560
Depth (mm)	550
Performance	
Energy Efficiency Class	A+
Energy Consumption Fan (kWh)	0.59
Energy Efficiency Class in Mode Static/Fan	Fan
Oven Temperature Range (°C)	30°C-230°C
Connected Load (W)	3000
Fuse Rating (A)	16
Interior Lights	One Halogen



KPK742220M

	KI K/4222011
Oven Features	
Digital Touch Controls	Touch
Functions	20
Digital Temperature Control	Yes
Fully Programmable Electronic Timer	Yes
Oven Door Glazing	Four
Cleaning	Pyrolytic
Cooling Fan	Yes
Steam	
Volume (Usable)	43
Accessories	
Number of Shelves	One
Grill/Meat Pan	Yes
Dimensions	
Appliance Dimensions	
Height (mm)	455
Width (mm)	594
Depth (mm)	567
Aperture Dimensions	
Height (mm)	450
Width (mm)	560
Depth (mm)	550
Performance	
Energy Efficiency Class	A+
Energy Consumption Fan (kWh)	0.69
Energy Efficiency Class in Mode Static/Fan	Fan
Oven Temperature Range (°C)	30°C–300°C
Connected Load (W)	3000
Fuse Rating (A)	16
Interior Lights	One Halogen

KSK882220M	KSK782220M	KPK842220M
Command Wheel	Touch	Command Wheel
22	22	20
Yes	Yes	Yes
Yes	Yes	Yes
Four	Four	Four
Enamel	Enamel	Pyrolytic
Yes	Yes	Yes
Yes	Yes	
43	43	43
Two	0	0
	One	One
Yes	Yes	Yes
455	455	455
594	594	594
567	567	567
450	450	450
	560	560
550	550	550
550	530	550
A+	A+	A+
0.69	0.69	0.59
Fan	Fan	Fan
30°C–230°C	30°C-300°C	30°C-300°C
3000	3000	3000
16	16	16
One Halogen	One Halogen	One Halogen

Features

COFFEE MACHINES





KKK994500M

KKK884500M/B

Electronic Touch Controls	Command Wheel	Touch
LED Display	Yes	Yes
Automatic Cappuccino Function	Yes	Yes
Pre-Programmed Coffee Selection	Yes	Yes
Water Sensor with LED when Refill Required	Yes	Yes
Steam/Water Spout with LED Indicators	Yes	Yes
Height Adjustable Coffee Dispenser	Yes	Yes
Lamp	Yes	Yes
Dimensions		
Appliance Dimensions		
Height (mm)	455	455
Width (mm)	594	594
Depth (mm)	361	361
Built-in Dimensions		
Height (mm)	450	450
Width (mm)	560	560
Depth (mm)	550	550
Electrical Connection		
Connected Load (W)	1350	1350
Fuse Rating (A)	13	13
Working Pressure (Bar)	15	15

VACUUM SEALERS



Features	
Place Settings	Touch
Cups and Glass Warming (40°C)	White
Plate Warming (60°C)	Yes
Variable Temperature Control	Yes
On/Off LED	Yes
Anti-slip Mat	Yes
Temperature Range	Yes
Dimensions	
Appliance Dimensions	
Height (mm)	131
Width (mm)	595
Depth (mm)	510
Built-in Dimensions	
Height (mm)	139
Width (mm)	560
Depth (mm)	550
Performance	
Connected Load (W)	400
Fuse Rating (A)	13



WARMING DRAWERS













Features				
Place Settings	12	12	6	6
Cups and Glass Warming (45°C)	Yes	Yes	Yes	Yes
Plate Warming / Food reheating (60°C)	Yes	Yes	Yes	Yes
Food Warming (80°C Max)	Yes	Yes	Yes	Yes
Defrosting / Dough proving (30°C Max)	Yes	Yes	Yes	Yes
Heating Element	Yes	Yes	Yes	Yes
Fan Air Circulation	Yes	Yes	Yes	Yes
Rotary Control Knob	Yes	Yes	Yes	Yes
Keep warm (70°C)	Yes	Yes	Yes	Yes
Variable Temperature Control	Yes	Yes	Yes	Yes
On/Off LED	Yes	Yes	Yes	Yes
Anti-slip Mat	Yes	Yes	Yes	Yes 30°C–80°C
Temperature Range	30°C-80°C	30°C-80°C	30°C-80°C	30°C-80°C
Dimensions				
Appliance Dimensions				
Height (mm)	295	295	140	140
Width (mm)	595	595	595	595
Depth (mm)	535	535	500	500
Built-in Dimensions				
Height (mm)	<u>2</u> 95	295	141	141
Width (mm)	560	560	560	560
Depth (mm)	550	550	550	550
Performance				
Connected Load (W)	800	800	800	800
Fuse Rating (A)	13	13	13	13

	KDE911424B
Features	
Place Settings	6
Cups and Glass Warming (40°C)	Yes
Plate Warming (60°C)	Yes
Food Warming (80°C Max)	Yes
Defrosting (30°C Max)	Yes
Heating Element	Yes
Fan Air Circulation	Yes
Rotary Control Knob	Yes
Keep warm (70°C)	Yes
Variable Temperature Control	Yes
Dn/Off LED	Yes
Anti-Slip Mat	Yes
Temperature Range	30-80°C
Dimensions	
Appliance Dimensions	
Height (mm)	140
Nidth (mm)	595
Depth (mm)	500
Built-in Dimensions	
Height (mm)	141
Width (mm)	560
Depth (mm)	550
Performance	
Connected Load (W)	800
Fuse Rating (A)	13

Features Microwave & Grill

Solo Microwave

Control Type

Quickstart

Oven Volume (ltr)

Electronic Clock/Programmer

MICROWAVES



MBB1756DEM

17

Command Wheel/ Touch on Glass

٠

٠

MBE2658DEM MBE2658SEM MBE2658SEB ٠ 26 26 26 Auto Defrost By Weight Programmes Default Favourite Auto Menus Command Wheel/ Touch on Glass Command Wheel/ Touch on Glass Command Wheel/ Touch on Glass ٠ ٠ ٠ ٠ ٠ ٠ ٠ ٠ ٠

Guickstart	· · · · · · · · · · · · · · · · · · ·	-	•	- -
Powersave Mode	•	•	•	•
Programme End Signal	•	•	•	•
Dimensions				
Appliance Dimensions				
Height (mm)	459	459	459	371
Width (mm)	596	596	596	594
Depth (mm)	404	404	404	316
Aperture Dimensions				
Height (mm)	450	450	450	360
Width (mm)	562	562	562	562
Depth (mm)	500	500	500	300
Performance				
Microwave Output (W)	900	900	900	800
Grill Output (W)	800			800
Connected Load (W)	1400	1400	1400	1250
Fuse Rating (A)	10	10	10	10



MBB1756SEM

MBB1755SEM

Features		
Microwave & Grill		
Solo Microwave	•	•
Oven Volume (ltr)	17	17
Auto Defrost By Weight Programmes	4	4
Default Favourite Auto Menus	3	3
Control Type	Command Wheel/ Touch on Glass	Command Wheel/ Touch on Glass
Electronic Clock/Programmer	•	•
Quickstart	•	•
Powersave Mode	•	•
Programme End Signal	٠	•
Dimensions		•
Appliance Dimensions		
Height (mm)	371	371
Width (mm)	594	494
Depth (mm)	316	316
Aperture Dimensions		
Height (mm)	360	360
Width (mm)	562	462
Depth (mm)	300	300
Performance		
Microwave Output (W)	800	800
Grill Output (W)		
Connected Load (W)	1250	1250
Fuse Rating (A)	10	10

INDUCTION HOBS



Control Type	Touch	Touch
Display	TFT	TFT
Control Position		Front Right
Bridge Function		Yes
Automatic Heat Up (Automax)		
Stop & Go	Yes	Yes
Residual Heat Indicator		Yes
ÖKO Timer		Yes
Minute Minder	Yes	Yes
Count Up Timer	Yes	Yes
Pan Sensor		Yes
Boosters	Yes	Yes
Child Lock		Yes
Hob ² Hood		Yes
		tes
Zone Specification		1.1.2
Front Left Spec		Induction
Front Left Rating (W)		2300/3200
Front Left Diameter (mm)		220
Rear Left Spec		Induction
Rear Left Rating (W)		2300/3200
Rear Left Diameter (mm)		220
Front Middle Spec		
Front Middle Rating (W) Front Middle Diameter (mm)		
		Induction
Rear Middle Spec Rear Middle Rating (W)		Induction 2300/3200
Rear Middle Diameter (mm)		2300/3200
Front Right Spec		Induction
Front Right Rating (W)		1800/2800
Front Right Diameter (mm)		180
Rear Right Spec		100
Rear Right Rating (W)		•••••••••••••••••••••••••••••••••••••••
Rear Right Diameter (mm)		
Dimensions		
Appliance Dimensions		
Width (mm)		780
Depth (mm)		520
Aperture Dimensions		••••
Height (mm)	44	
Width (mm)	810	750
Depth (mm)	520	490
Electrical Connection	J20	470
Connected Load (W)		7750
Fuse Rating (A)		7350 30

		$\begin{array}{c} \forall \forall \\ \bot \\ \underset{i=j=i}{\longrightarrow} \end{array} \downarrow$
IKE85651FB	IPE84571FB	IPE84531FB
Touch	Touch	Touch
N/A	N/A	Front Middle
Yes	Yes	•••••••••••••••••••••••••••••••••••••••
Yes	Yes	Yes
res	res	Tes
Induction	Induction	Induction
2300/3200	2300/3200	2300/3200
210	210	<u>2</u> 10
Induction	Induction	Induction
2300/3200	2300/3200	2300/3200
210	210	210
Induction	Induction	
2300/3200	2300/3200	
240	240	••••••
		Induction
		2300/3200
Induction	Induction	210
2300/3200	2300/3200	2300/3200
210	210	210
Induction	Induction	210
2300/3200	2300/3200	••••••
210	210	•
810	810	780
520	520	520
	520	
44	44	44
780	780	750
490	490	490
7350	7350	7400

INDUCTION HOBS


			1000	
	1 mm		per sente a	stanlar
	IKE84471FB	IKE85431FB	IAE84411FB	IKE84441FB
Features				
Control Type	Touch	Touch	Touch	Touch
Display				
Control Position	Front Right	Front Middle	Front Middle	Front Right
Bridge Function	Yes			Yes
Automatic Heat Up (Automax)	Yes	Yes	Yes	Yes
Stop & Go	Yes	Yes	Yes	Yes
Residual Heat Indicator	Yes	Yes	Yes	Yes
ÖKO Timer	Yes	Yes	Yes	Yes
Minute Minder	Yes	Yes	Yes	Yes
Count Up Timer	Yes	Yes	Yes	Yes
Pan Sensor	Yes	Yes	Yes	Yes
Boosters	Yes	Yes	Yes	Yes
Child Lock	Yes	Yes	Yes	Yes
Hob ² Hood	Yes	Yes	Yes	Yes
Zone Specification				
Front Left Spec	Induction	Induction	Induction	Induction
Front Left Rating (W)	2300/3200	1400/2500	2300/3200	2300/3200
Front Left Diameter (mm)	220	145	210	210
Rear Left Spec	Induction	Induction	Induction	Induction
Rear Left Rating (W)	2300/3200	2300/3200	2300/3200	2300/3200
Rear Left Diameter (mm)	220	210	210	210
Front Middle Spec		Induction		Induction
Front Middle Rating (W)		2300/3200		1400/2500
Front Middle Diameter (mm)		210		145
Rear Middle Spec	Induction			
Rear Middle Rating (W)	2300/3200			
Rear Middle Diameter (mm)	210			
Front Right Spec	Induction	Induction	Induction	
Front Right Rating (W)	1800/2800	1400/2500	2300/3200	
Front Right Diameter (mm)	180	145	210	
Rear Right Spec		Induction	Induction	Induction
Rear Right Rating (W)		2300/3200	2300/3200	2300/3600
Rear Right Diameter (mm)		210	210	240
Dimensions				
Appliance Dimensions				
Vidth (mm)	780	780	780	780
Depth (mm)	520	520	520	520
Aperture Dimensions				
Height (mm)	44	44	44	44
Width (mm)	750	750	750	750
Depth (mm)	490	490	490	490
Electrical Connection				
Connected Load (W)	7350	7350	7350	7350
Fuse Rating (A)	30	30	30	30

		1
	IKB84401FB	IKE74451
	Touch	Touch
·····	Front Right	Left & Rig

Display		
Control Position	Front Right	Left & Rig
Bridge Function		Yes
Automatic Heat Up (Automax)	Yes	Yes
Stop & Go	Yes	Yes
Residual Heat Indicator	Yes	Yes
ÖKO Timer	Yes	Yes
Minute Minder	Yes	Yes
Count Up Timer	Yes	Yes
Pan Sensor	Yes	Yes
Boosters	Yes	Yes
Child Lock	Yes	Yes
Hob ² Hood	Yes	Yes
Zone Specification		•••••••••••••••••••••••••••••••••••••••
Front Left Spec	Induction	Inductior
Front Left Rating (W)	2300/3200	2300/320
Front Left Diameter (mm)	210	210
Rear Left Spec	Induction	Inductior
Rear Left Rating (W)	2300/3200	2300/320
Rear Left Diameter (mm)	210	210
Front Middle Spec	Induction	
Front Middle Rating (W)	2300/3200	
Front Middle Diameter (mm)	210	
Rear Middle Spec		
Rear Middle Rating (W)		•••••••••••••••••••••••••••••••••••••••
Rear Middle Diameter (mm)		
Front Right Spec		Inductior
Front Right Rating (W)	·	2300/320
Front Right Diameter (mm)		
Rear Right Spec	Induction	Inductior
Rear Right Rating (W)	2300/3200	2300/320
Rear Right Diameter (mm)	210	
Dimensions		
Appliance Dimensions	700	
Width (mm)	780	710
Depth (mm)	520	520
Aperture Dimensions		•••••••••••••••••••••••••••••••••••••••
Height (mm)		
Width (mm)	750	680
Depth (mm)	490	490
Electrical Connection	775.0	
Connected Load (W)	7350	7350
Fuse Rating (A)	30	

Features

Control Type

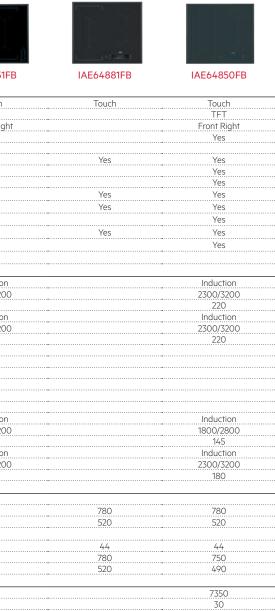

Features

INDUCTION HOBS



Control Type	Touch	Touch	Touch	Touch
Display				
Control Position	N/A	Front Right	Front Middle	Front Right
Bridge Function	Yes	Yes	Yes	Yes
Automatic Heat Up (Automax)	Yes	Yes	Yes	Yes
Stop & Go	Yes	Yes	Yes	Yes
Residual Heat Indicator	Yes	Yes	Yes	Yes
DKO Timer	Yes	Yes	Yes	Yes
4inute Minder	Yes	Yes	Yes	Yes
Count Up Timer	Yes	Yes	Yes	Yes
'an Sensor	Yes	Yes	Yes	Yes
Boosters	Yes	Yes	Yes	Yes
hild Lock	Yes	Yes	Yes	Yes
lob²Hood	Yes	Yes	Yes	Yes
Zone Specification				
ront Left Spec	Induction	Induction	Induction	Induction
Front Left Rating (W)	2300/3200	2300/3200	2300/3200	2300/3200
ront Left Diameter (mm)	210	220	210	220
lear Left Spec	Induction	Induction	Induction	Induction
lear Left Rating (W)	2300/3200	2300/3200	2300/3200	2300/3200
Rear Left Diameter (mm)	210	220	210	220
ront Middle Spec	Induction			
ront Middle Rating (W)	2300/3200			
ront Middle Diameter (mm)	240			•••••••••••••••••••••••••••••••••••••••
Rear Middle Spec				
Rear Middle Rating (W)			-	
Rear Middle Diameter (mm)				
ront Right Spec	Induction	Induction	Induction	Induction
ront Right Rating (W)	2300/3200	1400/2500	2300/3200	1400/2500
ront Right Diameter (mm)	210	145	210	145
Rear Right Spec	Induction	Induction	Induction	Induction
Rear Right Rating (W)	2300/3200	1800/2800	2300/3200	1800/2800
Rear Right Diameter (mm)	210	180	210	180
Dimensions				
ppliance Dimensions				
Vidth (mm)	810	620	590	590
Depth (mm)	520	520	520	520
perture Dimensions				
leight (mm)	44	44	44	44
Vidth (mm)	780	560	560	560
Depth (mm)	490	490	490	490
Electrical Connection				
Connected Load (W)	7350	7400	7400	7350
Fuse Rating (A)	30	30	30	30

F	IKE64450FE
Features Control Type	Temele
	Touch
Display	Enerst Middle
Control Position	Front Middle
Bridge Function	Yes
Automatic Heat Up (Automax)	Yes
Stop & Go	Yes
Residual Heat Indicator	Yes
ÖKO Timer	Yes
Minute Minder	Yes
Count Up Timer	Yes
Pan Sensor	Yes
Boosters	Yes
Child Lock	Yes
Hob ² Hood	
Zone Specification	
Front Left Spec	Induction
Front Left Rating (W)	2300/3200
Front Left Diameter (mm)	210
Rear Left Spec	Induction
Rear Left Rating (W)	2300/3200
Rear Left Diameter (mm)	210
Front Middle Spec	
Front Middle Rating (W)	-
Front Middle Diameter (mm)	
Rear Middle Spec	-
Rear Middle Rating (W)	
Rear Middle Diameter (mm)	
Front Right Spec	Induction
Front Right Rating (W)	2300/3200
Front Right Diameter (mm)	210
Rear Right Spec	Induction
Rear Right Rating (W)	2300/3200
Rear Right Diameter (mm)	2300/3200
Dimensions	210
Appliance Dimensions	
Width (mm)	590
Depth (mm)	520
Aperture Dimensions	
Height (mm)	44
Width (mm)	560
Depth (mm)	490
Electrical Connection	470
Connected Load (W)	7350
	30

244

IKE64441FB	IA664411FB	IKB64401FB
Touch	Touch	Touch
Front Right	Front Right	Front Right
Yes		
Yes	Yes	Yes
Yes	Yes	
Yes	Yes	Yes
Yes	Yes	Yes
Yes	Yes	Yes
Induction	Induction	Induction
2300/3200	2300/3700	2300/3700
210	210	210
Induction	Induction	Induction
2300/3200	1800/2800	1800/2800
210	180	
Induction	Induction	Induction
1400/2500 145	1400/2500 145	1400/2500 145
Induction	Induction	Induction
1800/2800	1800/2800	1800/2800
180	180	180
590	590	590
520	520	520
44	44	
560	560	560
490	490	490
7350	7350	7350
30	30	30

INDUCTION HOBS

		\odot		
	IKB64301XB	HK604200IB	IKE95471FB	IKK93431FB
Features				
Control Type	Touch	Touch	Touch	Touch
Display				
Control Position	Front Right	Front Right	Front Middle	Front Middle
Bridge Function			Yes	
Automatic Heat Up (Automax)	Yes		Yes	Yes
Stop & Go	Yes		Yes	Yes
Residual Heat Indicator	Yes	Yes	Yes	Yes
ÖKO Timer	Yes		Yes	Yes
Minute Minder	Yes		Yes	Yes
Count Up Timer	Yes		Yes	Yes
Pan Sensor	••••••		Yes	Yes
Boosters	Yes	Yes	Yes	Yes
Child Lock	Yes	Yes	Yes	Yes
Hob ² Hood	Yes	105	Yes	105
	Yes		Yes	
Zone Specification				
Front Left Spec	Induction	Induction	Induction	
Front Left Rating (W)	2300/3700	2300/2800	2300/3200	
Front Left Diameter (mm)	210	210	220	
Rear Left Spec	Induction	Induction	Induction	Induction
Rear Left Rating (W)	1800/2800	1200	2300/3200	2300/3200
Rear Left Diameter (mm)	180		220	210
Front Middle Spec	·····		Induction	
Front Middle Rating (W)		•••••••••••••••••••••••••••••••••••••••	1800/3700	.
Front Middle Diameter (mm)			280	
Rear Middle Spec	·····			Induction
Rear Middle Rating (W)		•••••••••••••••••••••••••••••••••••••••		2300/3200
Rear Middle Diameter (mm)				210
Front Right Spec	Induction	Induction	Induction	
ront Right Rating (W)	1400/2500	1200/1800	1400/2500	•••••••••••••••••••••••••••••••••••••••
Front Right Diameter (mm)	145	145	145	
Rear Right Spec	Induction		Induction	Induction
Rear Right Rating (W)	1800/2800	1800	2300/3200	2300/3200
Rear Right Diameter (mm)	180	180	210	
Dimensions				
Appliance Dimensions				
Vidth (mm)	590	590	910	910
Depth (mm)	520	520	520	
Aperture Dimensions				
Height (mm)	44	60	44	
Nidth (mm)	560	560	880	880
Depth (mm)	490	490	490	380
Electrical Connection				
Connected Load (W)	7350	3000	7200	6900
Fuse Rating (A)	30	13	30	30

CERAMIC HOBS



Control Type	Touch
Control Position	Front Middle
Automatic Heat Up (Automax)	
Stop & Go	Yes
Residual Heat Indicator	Yes
Minute Minder	Yes
Count Up Timer	Yes
Child Lock	Yes
Zone Specification	•
Front Left Spec	Hilight
Front Left Rating (W)	1800
Front Left Diameter (mm)	180
Rear Left Spec	Hilight
Rear Left Rating (W)	1200
Rear Left Diameter (mm)	145
Front Middle Spec	
Front Middle Rating (W)	
Front Middle Diameter (mm)	
Rear Middle Spec	Triple Hilight
Rear Middle Rating (W)	1050/1950/2700
Rear Middle Diameter (mm)	145/210/270
Front Right Spec	Hilight
Front Right Rating (W)	1800
Front Right Diameter (mm)	180
Rear Right Spec	Dual Hilight
Rear Right Rating (W)	1400/2200
Rear Right Diameter (mm)	170/265
Dimensions	
Appliance Dimensions	
Width (mm)	910
Depth (mm)	520
Aperture Dimensions	
Height (mm)	50
Width (mm)	880
Depth (mm)	490
Electrical Connection	
Connected Load (W)	7900
Fuse Rating (A)	30

00a	\bigcirc \bigcirc	
	:0.0 i	
HK854080FB	HK764070FB	HK634060XB
Touch	Touch	Touch
Front Middle	Left & Right	Front Right
Yes	Yes	Yes
Yes	Yes Yes	Yes Yes
Yes Yes	Yes	Yes
Yes	Yes	Yes
	Yes	Yes
Yes	res	res
Dual Hilight	Triple Hilight	Dual Hilight
700/1700	800/1600/2300	750/2200
120/180	120/175/210	120/210
Hilight	Hilight	Hilight
1200 145	1200 145	1200 145
Triple Hilight		
1050/1950/2700		•
145/210/270		•
	Hilight	Hilight
	1800	1200
	180	145
Dual Hilight	Dual Hilight	Dual Hilight
1400/2200	1400/2200	1500/2400
170/265	170/265	170/265
780	710	576
520	520	516
50	38	38
750	680	560
490	490	490
7800	7500	7000
/000		

CERAMIC HOBS

НК624010FB	НК614000СВ
Touch	Rotary
Front Right	Side Right

	11102101013	
Features		
Control Type	Touch	Rotary
Control Position	Front Right	Side Right
Automatic Heat Up (Automax)		
Stop & Go		
Residual Heat Indicator	Yes	Yes
Minute Minder		
Count Up Timer		
Child Lock	Yes	
Zone Specification	••••••	
Front Left Spec	Dual Hilight	Hilight
Front Left Rating (W)	750/2200	1800
Front Left Diameter (mm)	120/210	180
Rear Left Spec	Hilight	Hilight
Rear Left Rating (W)	1200	1200
Rear Left Diameter (mm)	145	145
Front Middle Spec		
Front Middle Rating (W)		
Front Middle Diameter (mm)		
Rear Middle Spec		
Rear Middle Rating (W)		
Rear Middle Diameter (mm)		
Front Right Spec	Hilight	Hilight
Front Right Rating (W)	1200	1200
Front Right Diameter (mm)	145	145
Rear Right Spec	Hilight	Hilight
Rear Right Rating (W)	1800	1800
Rear Right Diameter (mm)	180	180
Dimensions		
Appliance Dimensions		
Width (mm)	590	576
Depth (mm)	520	506
Aperture Dimensions		
Height (mm)	38	38
Width (mm)	560	560
Depth (mm)	490	490
Electrical Connection		
Connected Load (W)	6400	6400
Fuse Rating (A)	30	30

COMBO HOBS

IDK84451IB

Hob Features	
Constant Time	DirekTouch Slider
Display	LED
Bridge Function	• (2)
Automatic Heat Up	•
Stop & Go	•
Residual Heat Indicator	•
Timer	•
Pan Sensor	•
Child Lock	•
	-
Zone Specification	
Front Left Spec	
Front Left Rating (W)	2100/3700
Front Left Diameter (mm)	184x220
Rear Left Spec	
Rear Left Rating (W)	2100/3700
Rear Left Diameter (mm)	184x220
Front Right Spec	•••••••••••••••••••••••••••••••••••••••
Front Right Rating (W)	2100/3700
Front Right Diameter (mm)	184x220
Rear Right Spec	•••••••••••••••••••••••••••••••••••••••
Rear Right Rating (W)	2100/3700
Rear Right Diameter (mm)	184x220
Appliance Dimensions	••••••
Appliance Dimensions	
Width (mm)	830
Depth (mm)	510
Aperture Dimensions	
Height (mm)	210
Width (mm)	805
Depth (mm)	490
Electrical Connection	
Connected Load (W)	7400
Fuse Rating (A)	16
Cooker Hood Features	
Control Type	Touch on Glass Slider
Fan Speed	9 + intensive
Charcoal Filter Included	٠
Grease Filter	Aluminium Mesh
Energy Class	A+
Efficiency Max (m3/h)	400
Efficiency Intensive (m3/h)	420
Noise Max Setting dB(A)	71
Ducted Version	
Model Denomination	IDK84452IB
Charcoal Filter Included	·····
Efficiency Max (m3/h)	600
Efficiency Intensive (m3/h)	647
Noise Max Setting dB(A)	68



IDE84241IB

er Touch Control LED • (1)
LED
• (1)
•
•
•
•
1600/1850 184x220
184x220
2100/3000
2100/3000 184x220
104XZZU
2100/1/.00
2100/1400 184x220
2300/3000
184x220
1077220
830 510
510
210
805
210 805 490
7400
16
der Touch Control 9 + intensive
9 + intensive
•
h Aluminium Mesh A+
A+
400
420
71
• Aluminium Mesh A+ 400 420 71
IDE842412B
600
647 68
68

GAS HOBS





Features Control Type Touch Rotary Touch Rotary Ignition Type Integral Integral Auto Integral Stop & Go Yes Yes Yes Minute Minder Yes Front Middle Yes Front Middle Yes Front Middle Front Middle Control Position LED Display Red Red Red Cast Iron Cast Iron Pan Supports Cast Iron Cast Iron Residual Heat Indicator Yes Yes Yes Hob²Hood Yes Yes Yes Safety Thermocouples Yes Yes Yes Yes Zone Specification Front Left Spec Semi Rapid Burner Auxiliary Burner Rapid Burner Semi Rapid Burner Front Left Rating (wh) 1900 1000 3000 1900 Front Left Diameter (mm) 80 54 100 80 Rear Left Spec Semi Rapid Burner Semi Rapid Burner Auxiliary Burner Semi Rapid Burner Rear Left Rating (wh) 1900 1900 1000 1900 Rear Left Diameter (mm) 80 70 54 80 Front Middle Spec Wok Burner Semi Rapid Burner Wok Burner Front Middle Rating (wh) 3800 2000 3800 Front Middle Diameter (mm) 122 70 122 Rear Middle Spec Wok Burner Semi Rapid Burner Rear Middle Rating (wh) 3800 2000 Rear Middle Diameter (mm) 122 70 Front Right Spec Auxiliary Burner Auxiliary Burner Semi Rapid Burner Wok Burner Front Right Rating (wh) 1000 1900 4000 1000 Front Right Diameter (mm) 65 122 65 70 Rear Right Spec Rear Right Rating (wh) Semi Rapid Burner Semi Rapid Burner Auxiliary Burner Semi Rapid Burner 1900 1900 1000 1900 Rear Right Diameter (mm) 80 70 54 80 10500 10500 13000 10500 Max Gas Power (W) Dimensions Appliance Dimensions 880 880 858 750 Width (mm) Depth (mm) 510 510 821 510 Aperture Dimensions 60 830 40 830 52 720 Height (mm) 40 Width (mm) 830 480 480 480 490 Depth (mm) Electrical Connection 13 13 13 13 Fuse Rating (A)

Control Type	Potany
Ignition Type	Rotary Integral
Stop & Go	integral
Minute Minder	
Control Position	Front Middle
LED Display	FIGHTMIddle
Pan Supports	Cast Iron
Residual Heat Indicator	Casi iioii
Hob ² Hood	
Safety Thermocouples	Yes
Zone Specification	Tes
· · · · · · · · · · · · · · · · · · ·	
Front Left Spec	Auxiliary Burner
Front Left Rating (wh)	1000 85.5
Front Left Diameter (mm)	· · · · · · · · · · · · · · · · · · ·
Rear Left Spec	Semi Rapid Burner
Rear Left Rating (wh)	2000
Rear Left Diameter (mm)	107.5
Front Middle Spec	
Front Middle Rating (wh)	
Front Middle Diameter (mm)	
Rear Middle Spec	Rapid Burner
Rear Middle Rating (wh)	2900
Rear Middle Diameter (mm)	128.5
Front Right Spec	Auxiliary Burner
Front Right Rating (wh)	1000
Front Right Diameter (mm)	85.5
Rear Right Spec	Semi Rapid Burner
Rear Right Rating (wh)	2000
Rear Right Diameter (mm)	107.5
Max Gas Power (W)	8900
Dimensions	
Appliance Dimensions Width (mm)	740
Depth (mm)	510
Aperture Dimensions	
Height (mm)	45
Width (mm)	560
Depth (mm)	490
Electrical Connection	170
Fuse Rating (A)	13



HG755820UM




HKB75540NB




HG775450VB

Rotary	Rotary	Rotary
Integral	Integral	Integral
	Yes	
Front Middle	Front Middle	Front Middle
	Red	
Cast Iron	Cast Iron	Cast Iron
	Yes	
	Yes	
Yes	Yes	Yes
Auxiliary Burner	Semi Rapid Burner	Semi Rapid Burner
1000	1900	1900
85.5	70	70
Semi Rapid Burner	Semi Rapid Burner	Semi Rapid Burner
2000	1900	1900
107.5	70	70
		•••••••••••••••••••••••••••••••••••••••
Rapid Burner	Wok Burner	Wok Burner
2900	3800	3800
128.5	122	122
Auxiliary Burner	Auxiliary Burner	Auxiliary Burner
1000	1000	1000
85.5	54	54
Semi Rapid Burner	Semi Rapid Burner	Semi Rapid Burner
2000	1900	1900
107.5	70	70
8900	10500	10500
0700	10300	10500
745	740	740
515	510	510
UU	510	510
45	45	
560	560	560
490	480	480

GAS HOBS

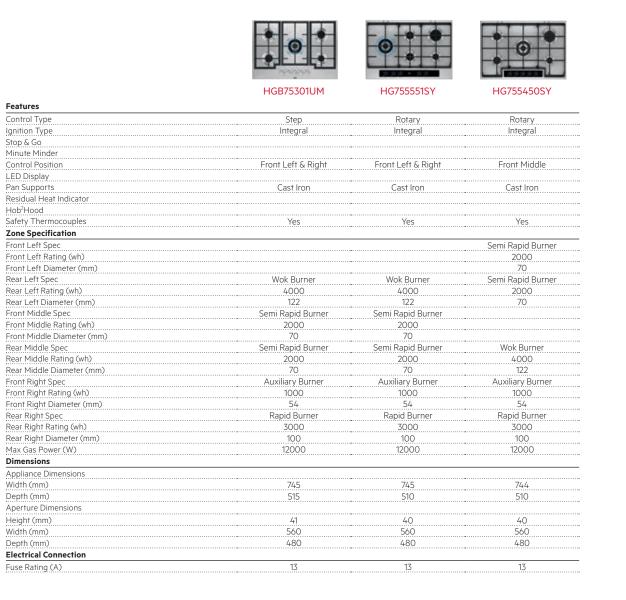



Control Type	Rotary
Ignition Type	Integral
Stop & Go	
Minute Minder	
Control Position	Front Middle
LED Display	
Pan Supports	Enamel
Residual Heat Indicator	
Hob ² Hood	
Safety Thermocouples	Yes
Zone Specification	
Front Left Spec	Semi Rapid Burner
Front Left Rating (wh)	2000
Front Left Diameter (mm)	70
Rear Left Spec	Semi Rapid Burner
Rear Left Rating (wh)	2000
Rear Left Diameter (mm)	70
Front Middle Spec	
Front Middle Rating (wh)	
Front Middle Diameter (mm)	
Rear Middle Spec	Wok Burner
Rear Middle Rating (wh)	4000
Rear Middle Diameter (mm)	122
Front Right Spec	Auxiliary Burner
Front Right Rating (wh)	1000
Front Right Diameter (mm)	54
Rear Right Spec	Rapid Burner
Rear Right Rating (wh)	3000
Rear Right Diameter (mm)	100
Max Gas Power (W)	12000
Dimensions	
Appliance Dimensions	
Width (mm)	744
Depth (mm)	510
Aperture Dimensions	
Height (mm)	40
Width (mm)	560
Depth (mm)	480
Electrical Connection	
Fuse Rating (A)	13

Features









HKB64540NB

Rotary	Rotary	Rotary
Integral	Integral	Integral
		Yes
Front Middle	Front Middle	Front Middle
		Red
Cast Iron	Cast Iron	Cast Iron
		Yes
		Yes
Yes	Yes	Yes
Auxiliary Burner	Auxiliary Burner	Auxiliary Burner
1000	1000	1000
85.5	85.5	54
Rapid Burner	Rapid Burner	Rapid Burner
2900	2900	2900
128.5	128.5	100
Semi Rapid Burner	Semi Rapid Burner	Semi Rapid Burner
2000	2000	1900
107.5	107.5	70
Semi Rapid Burner	Semi Rapid Burner	Semi Rapid Burner
2000	2000	1900
107.5 7900	107.5 7900	
7900	7900	//00
590	590	590
520	520	520
320	520	
45	45	30
560	560	560
490	490	480
13		

GAS HOBS



	1100/400000	11077555070	11077343070	11007400000
Features				
Control Type	Rotary	Rotary	Rotary	Rotary
Ignition Type	Integral	Integral	Integral	Integral
Stop & Go				
Minute Minder				
Control Position	Front Middle	Front Middle	Front Middle	Front Middle
LED Display			0	
Pan Supports	Cast Iron	Cast Iron	Cast Iron	Cast Iron
Residual Heat Indicator				
Hob ² Hood				
Safety Thermocouples	Yes	Yes	Yes	Yes
Zone Specification				
Front Left Spec	Wok Burner		Semi Rapid Burner	Wok Burner
Front Left Rating (wh)	3800		1900	3800
Front Left Diameter (mm)	122		70	122
Rear Left Spec	Semi Rapid Burner	Wok Burner	Semi Rapid Burner	Semi Rapid Burne
Rear Left Rating (wh)	1900	3800	1900	1900
Rear Left Diameter (mm)	70	122	70	70
Front Middle Spec		Auxiliary Burner		
Front Middle Rating (wh)		1000		
Front Middle Diameter (mm)		54		
Rear Middle Spec		Semi Rapid Burner	Wok Burner	
Rear Middle Rating (wh)		1900	3800	
Rear Middle Diameter (mm)		70	122	
Front Right Spec	Auxiliary Burner	Semi Rapid Burner	Auxiliary Burner	Auxiliary Burner
Front Right Rating (wh)	1000	1900	1000	1000
Front Right Diameter (mm)	54	70	54	54
Rear Right Spec	Semi Rapid Burner	Semi Rapid Burner	Semi Rapid Burner	Semi Rapid Burne
Rear Right Rating (wh)	1900	1900	1900	1900
Rear Right Diameter (mm)	70	70	70	70
Max Gas Power (W)	7700	10500	10500	7700
Dimensions				
Appliance Dimensions				
Width (mm)	590	766	696	576
Depth (mm)	520	516	516	516
Aperture Dimensions				
Height (mm)	46	53	53	53
Width (mm)	560	750	680	560
Depth (mm)	480	490	490	490
Electrical Connection	••••••			
Fuse Rating (A)	13	13	13	13

	HGB64301UM
Features	
Control Type	Rotary
Ignition Type	Integral
Stop & Go	
Minute Minder	••••••
Control Position	Front Right
LED Display	
Pan Supports	Cast Iron
Residual Heat Indicator	
Hob ² Hood	
Safety Thermocouples	Yes
Zone Specification	
Front Left Spec	Wok Burner
Front Left Rating (wh)	4000
Front Left Diameter (mm)	122
Rear Left Spec	Semi Rapid Burner
Rear Left Rating (wh)	2000
Rear Left Diameter (mm)	70
Front Middle Spec	
Front Middle Rating (wh)	
Front Middle Diameter (mm)	•••••
Rear Middle Spec	•••••
Rear Middle Rating (wh)	•
Rear Middle Diameter (mm)	•••••
Front Right Spec	Auxiliary Burner
Front Right Rating (wh)	1000
Front Right Diameter (mm)	54
Rear Right Spec	Semi Rapid Burner
Rear Right Rating (wh)	2000
Rear Right Diameter (mm)	70
Max Gas Power (W)	9000
Dimensions	
Appliance Dimensions	
Width (mm)	595
Depth (mm)	525
Aperture Dimensions	
Height (mm)	41
Width (mm)	560
	480
Depth (mm) Electrical Connection	480
	17
Fuse Rating (A)	13

*

•

		• •	
1	HG654550SY	HG654351SM	HG644351SM
	Rotary Integral	Rotary Integral	Rotary Integral
	Front Right	Front Right	Front Right
	Cast Iron	Cast Iron	Enamel
	Yes	Yes	Yes
	Wok Burner 4000 122	Rapid Burner 3000W/100mm	Wok Burner 4000 122
er	Semi Rapid Burner 2000 70	Semi Rapid Burner 2000 70	Semi Rapid Burner 2000 70
-	Auxiliary Burner 1000 54	Auxiliary Burner 1000 54	Auxiliary Burner 1000 54
er	Semi Rapid Burner 2000 70	Semi Rapid Burner 2000 70	Semi Rapid Burner 2000 70
	9000	8000	9000
	595 510	595 510	595 510
	40 560 480	40 560 480	40 560 480
	13	13	13

MIXED FUEL

	3
	-
· fast	
HD955100NB	HD634170NB

Features		
Control Type	Touch/Rotary	Touch/Rotary
Control Position	Front	Front
Automatic Heat Up (Automax)	Yes	Yes
itop & Go	Yes	Yes
Residual Heat Indicator	Yes	Yes
ÖKO Timer	Yes	
Minute Minder	Yes	Yes
Count Up Timer	Yes	Yes
Pan Sensor	Yes	Yes
Boosters	Yes	Yes
Child Lock	Yes	Yes
Cone Specification		
ront Left Spec		Induction
ront Left Rating (W)	· · · · · · · · · · · · · · · · · · ·	2300/2900
ront Left Diameter (mm)		210
Rear Left Spec	Dual Crown Burner	Induction
Rear Left Rating (W)	5000	1400/2500
lear Left Diameter (mm)	134	140
ront Middle Spec	Induction	
ront Middle Rating (W)	2200/3600	
ront Middle Diameter (mm)	210	
Rear Middle Spec	Induction	
Rear Middle Rating (W)	1400/2500	
ear Middle Diameter (mm)	145	
ront Right Spec	Induction	Semi Rapid
ront Right Rating (W)	1400/2500	1900
ront Right Diameter (mm)	145	70
lear Right Spec	Induction	Rapid Burner
lear Right Rating (W)	1800/2800	2900
ear Right Diameter (mm)	180	100
Dimensions		
ppliance Dimensions		
Vidth (mm)	880	590
Pepth (mm)	520	520
perture Dimensions	525	
leight (mm)	40	40
/idth (mm)	830	560
Depth (mm)	490	490
lectrical Connection	470	470
Connected Load (W)	6800	3700
Fuse Rating (A)	30	16

CRYSTALLINE



Hob Type	2 Zone MaxiSense
Control Type	DirekTouch
Fuel Type	Induction
Triple Zone	-
Bridge Function	Yes
Automatic Heat Up (Automax)	Yes
Stop & Go	Yes
Residual Heat Indicator	Yes
Minute Minder	Yes
Count Up Timer	Yes
Pan Sensor	Yes
Booster	Yes
Child Lock	Yes
Gas Safety Shut off	
Zone Specification	
Front Spec	Induction
Front Rating (kW)	2.3/3.2
Front Diameter (mm)	170x265
Rear Spec	Induction
Rear Rating (kW)	2.3/3.2
Rear Diameter (mm)	170x265
Dimensions	
Appliance Dimensions	
Width (mm)	360
Depth (mm)	520
Aperture Dimensions	
Height (mm)	55
Width (mm)	340
Depth (mm)	490
Electrical Connection	· · · · · · · · · · · · · · · · · · ·
Connected Load (W)	3700
Fuse Rating (A)	16
Lpg Conversion Kit	•

	HC452601EB	HC451501EB	HC411521GB
e	Teppanyaki	Induction Wok	Wok Burner
	DirekTouch	DirekTouch	Rotary
•••••	Induction	Induction	Gas
	Yes	Yes	
		Yes	
	Yes	Yes	
	Yes	Yes	
•••••	Yes	Yes	
		Yes Yes	
	Yes	Yes	
•••••	Yes	Yes	
·····			Yes
	Induction	Induction	Double Crown
•••••	1.4	2.3/3.2	5
•••••	145	300	130
•••••	Induction	500	150
•••••	1.4		
••••••	14		
	C#1		
	360	360	360
	520	520	520
	520	520	520
•••••	55	55	60
	340	340	340
•••••	490	490	490
•••••			
	3200	3200	25
·····-	13	16	13
•••••			Yes

CRYSTALLINE



Hob Type	2 Burner Gas	2 Zone Ceramic
Control Type	Rotary	DirekTouch
Fuel Type	Gas	Ceramic
Triple Zone		Yes
Bridge Function		
Automatic Heat Up (Automax)		Yes
Stop & Go		Yes
Residual Heat Indicator		Yes
Minute Minder		Yes
Count Up Timer		Yes
Pan Sensor		
Booster	· · · · · · · · · · · · · · · · · · ·	
Child Lock		Yes
Gas Safety Shut off	Yes	
Zone Specification		
Front Spec	Auxiliary	Single
Front Rating (kW)	1	1.2
Front Diameter (mm)	54	145
Rear Spec	Rapid	Triple
Rear Rating (kW)	2.4	0.8/1.6/2.3
Rear Diameter (mm)	100	120/175/210
Dimensions		
Appliance Dimensions	-	
Width (mm)	360	360
Depth (mm)	520	520
Aperture Dimensions		
Height (mm)	60	38
Width (mm)	340	340
Depth (mm)	490	490
Electrical Connection		
Connected Load (W)	25	3500
Fuse Rating (A)	13	16
Lpg Conversion Kit	Yes	

FREESTANDING COOKERS



CIB6740ACB

	CIB6/40ACB	
Oven Features		
T = Top/B = Bottom	T/B	
Control Type	Rotary	
Display	LED	
Child Lock	•	
Fully Programmable Timer	•	
Cleaning (Both Ovens)	Catalytic	
Oven Doors Glazing	Triple	
Cooling Fan	•	
Hob Features		
Ноb Туре		Μ
Automatic Heat Up (Automax)	•	
Stop + Go	•	
Residual Heat/Hob On Indicators	•	
Boosters	•	
Top Oven Features		
Number of Cooking Functions	3	
Top Oven Capacity (Usable) ltr	39	
Main Oven Features		
Number of Cooking Functions	8	
Main Oven Capacity (Usable) ltr	73	
Keep Warm Function	•	
Fast Heat Up	•	
Food Probe	•	
Telescopic Rails	•	
Zone Specification		
No. of Cooking Functions	4 sections	
Front Left Spec		
Front Left Rating (kW)	2.3/3.6	
Front Left Diameter (mm)	210	
Front Right Spec		
Front Right Rating (kW)		
Front Right Diameter (mm)	180	
Rear Left Spec		
Rear Left Rating (kW)	1.4/2.5	
Rear Left Diameter (mm)	140	
Rear Right Spec		
	1.8/2.8	
Rear Right Diameter (mm)	180	
Product Dimensions		
Height (mm)		
Width (mm)	600	
	609	
Performance		
Oven Temperature Range (°C)	100–250	
Energy Efficiency Class	Α	
Energy Efficiency Class In Mode	Static/Fan	
Energy Consumption Fan (kWh)		
Cooking Standard Load Fan (mins)	-/0.47	
Energy Consumption Static (kWh)	0.75/0.95	
Cooking Standard Load Static (mins)	41/51	
Connected Load (kW)	11.3	
Fuse Rating (A)	30	
Baking Tray Surface Area (cm)	1330	
Oven Power (Max)	2.8/3.0	
Grill Power (Max)	2.7/2.7	

CIB6731ACM	CIB6730ACM	CCB6761ACB
T/B	T/B	T/B
Rotary	Rotary	Rotary
LED	LED	LED
•	•	
(Minute minder)	(Minute minder)	•
Catalytic	Catalytic	Catalytic
Triple	Triple	Triple
•	•	•
Maxisense Induction	Maxisense Induction	Ceramic
•	•	Ceramic
•	•	
•	•	•
3	3	3
39	39	39
	3 73	8
73		
	-	•
		•
	······	•
4 sections	4 sections	4 sections
2.3/3.6	2.3/3.6	1.0/2.2
210	210	140/210
10/20	1.8/2.8	10
1.8/2.8 180	1.0/2.0	1.2 145
100	100	145
1.4/2.5	1.4/2.5	1.2
140	140	145
1.8/2.8	1.8/2.8	1.8
180	180	180
894-912	894-912	894-912
600	600	600 609
609	609	009
100-250	100–250	100-250
A	A	A
Static/Fan	A Static/Fan	Static/Fan
-/0.82	-/0.82	-/0.82
-/0.47	-/0.47	-/0.47
0.75/0.95	0.75/0.82	0.75/0.95
41/51	41/51	41/51
11.3	11.3	12.1
30	30	30
1330	1330	1330
2.8/3.5 1.7/2.7	2.8/3.0 1.7/2.7	2.8/3.0 19/2.7
1.77 2.7	1.772.7	1.7/ 2.7

FREESTANDING COOKERS



Γ = Top/B = Bottom	T/B	T/B	T/B	T/B
Control Type	Rotary	Rotary	Rotary	Rotary
Display	LED	LED	LED	LED
hild Lock		•••••••••••••••••••••••••••••••••••••••		•••••••••••••••••••••••••••••••••••••••
ully Programmable Timer	•	•	(Minute Minder)	(Minute Minder)
leaning (Both Ovens)	Catalytic	Catalytic	Catalytic	Catalytic
oven Doors Glazing	Triple	Triple	Triple	Triple
ooling Fan	•	•	•	•
lob Features	••••••			•••••••••••••••••••••••••••••••••••••••
lob Type	Ceramic	Ceramic	Dual Fuel	Gas
Nutomatic Heat Up (Automax)	Cerainic	Ceramic	Duair dei	Uas
top + Go	••••••			•••••••••••••••••••••••••••••••••••••••
esidual Heat/Hob On Indicators		•		
	•	•		•••••••••••••••••••••••••••••••••••••••
oosters	••••••			
op Oven Features				
lumber of Cooking Functions	3	3	3	2
op Oven Capacity (Usable) ltr			39	36
lain Oven Features				
lumber of Cooking Functions	3	3	3	1
1ain Oven Capacity (Usable) Itr	72	73	77	83
éep Warm Function				
ast Heat Up	•	•		
ood Probe	•	•••••••••••••••••••••••••••••••••••••••		•••••••••••••••••••••••••••••••••••••••
elescopic Rails	•	******		••••••
one Specification	••••••			
lo. of Cooking Functions	4 sections	4 sections	4 sections	4 sections
Front Left Spec				, seenons
ront Left Rating (kW)	1.0/2.2	1.0/2.2	3.0	3.0
ront Left Diameter (mm)	140/210	1.0/2.2	110	110
ront Right Spec	140/210	170/210	110	110
ront Right Rating (kW)	1.2	1.2	1.0	10
ront Right Diameter (mm)		1.2	66	
Rear Left Spec	145		00	
	10	1.2	10	10
Rear Left Rating (kW)	1.2		1.9	1.9
lear Left Diameter (mm)	145	. 145	80	80
Rear Right Spec	10	10	10	10
lear Right Rating (kW)	1.8	1.8	1.9	1.9
lear Right Diameter (mm)	180	180	80	80
roduct Dimensions				
leight (mm)	894	894-912	894-912	894-912
/idth (mm)	600	600	600	600
lepth (mm)	609	609	609	609
erformance				
ven Temperature Range (°C)	100-250	100-250	30-300	30-300
nergy Efficiency Class	A	A	A	A
nergy Efficiency Class In Mode	Static/Fan	Static/Fan	Static/Fan	Static/Static
nergy Consumption Fan (kWh)	-/0.82	-/0.82	-/0.83	
ooking Standard Load Fan (mins)	-/47	_/0.47	-/0.47	•••••••••••••••••••••••••••••••••••••••
nergy Consumption Static (kWh)	0.75/0.82	0.75/0.82	0.75	1.35/1.8
ooking Standard Load Static (mins)	41/51	41/51	47/47	47/47
onnected Load (kW)	11.9	12.1	5.2	2.4
use Rating (A)	30	30	20	2.4
aking Tray Surface Area (cm)	1330	1330	1254	
Nen Power (Max)	2.5/3.0	2.8/3.0	2.5/2.8	1.7/2.4
			• • • • • • • • • • • • • • • • • • • •	
Grill Power (Max)	1.9/2.9	1.9/2.7	-/2.7	-/2.3

DESIGNER HOODS



Control type	Electronic push button
Hob2Hood	Electronic pash barron
Fan Speed	3 + boost
Breeze function	5 • 60031
Lights	LED spotlight
No of lamp x W	ELD Spongin
Charcoal filter	2; Included
Charcoal filter type	MCFB29
Ultra charcoal filter	N/A
Ultra charcoal filter type	N/A
Grease filter Type	Aluminium mesh
Ducted Max (ca, m3/h)	N/A
Ducted boost (ca, m3/h)	N/A
Noise (Max setting) Ducted	N/A
Recirculation maximum (ca.m3/h)	660
Recirculation boost (ca, m3/h)	700
Noise (Max Setting) Recirculation (dB(A))	72
Annual energy consumption, kWh/annum	0.0
Energy efficiency class	N/A
Fluid Dynamic Efficiency Class	N/A
Lighting efficiency Class	N/A
Grease filter Efficiency	N/A
Grease filter Efficiency Class	0.0
Off mode power (W)	0.0
Stand by Power (W)	0.0
Install height (mm)	
Minimum distance from cooking top - electric	50
Minimum distance from cooking top - gas	65
Dimensions	
Width	900
Depth	440
Height Max	1250
Height of Body	170
Other	
Air Outlet	N/A

-	
DLE0630B	DLE0431W
Electronic push button	Electronic push button
3 + boost	3 + boost
LED spotlight	LED spotlight
3	
1; Included	1; Included
MCFB29	MCFB29
N/A	N/A
N/A	N/A
Aluminium mesh	Aluminium mesh
N/A	N/A
N/A	N/A
N/A	N/A
330	330
350	350
70	70
0.0	0.0
N/A	N/A
N/A	N/A
	N/A
N/A N/A	N/A N/A
0.0	0.0
0.0	0.0
0.0	0.0
50	50
65	65
655	500
655	500
1250	1250
170	170
N/A	N/A

HOOD

HOODS					
	DIK7190HG	DIE6180HM	DDE5980G	DCK6290HG	
Overview					
Control Type	Touch on Glass	Touch on Glass	Touch on Glass	Electronic Push Buttons	
Hob ² Hood	•	•		•	
Fan Speed	3+2 Boost	3+2 Boost	3+2 Boost	3+boost	
Breeze Function	•	•	•		
_ights	Dimmable LED Stripe	Dimmable Squared LED	LED Stripe	Dimmable LED Stripe	
No. of Lamp x W	4 x 1.75 W	4 x 2 W	1 x 7 W	2 x 12 W	
Charcoal Filter	1; Included	1; Included	2; Included	2; Accessory	
Charcoal Filter Type	TYPE15	EFF72	EFB1061	EFF62	
Jltra Charcoal Filter	1; Accessory	1; Accessory			
Jltra Charcoal Filter Type	SUPCHARC-E	SUPCHARC-F			
Grease Filter Type	Stainless Steel Design Filter	Stainless Steel Design Filter	Aluminium Cassette	Aluminium Cassette	
Ducted Maximum (ca. m3/h)	400	340	350	650	
Ducted Boost (ca. m3/h)	801	710	700	870	
loise (Max. Setting) Ducted (dB(A))	54	54	54	67	
Recirculation Maximum (ca. m3/h)	300	320	335	380	
Recirculation Boost (ca. m3/h)	500	520	680	430	
Voise (Max. Setting) Recirculation (dB(A))	75	67	61	74	
Annual Energy Consumption, kWh/annum	35.1	45.4	59.5	46.4	
Energy Efficiency Class	A++	A+	A	A+	
Fluid Dynamic Efficiency Class	A	A	A	A	
ighting Efficiency Class	В	A	A	D	
Grease Filter Efficiency	76	85.1	65.1	45	
Grease Filter Efficiency Class	С	В	D	G	
Off Mode Power (W)	0	0.85	0.85	0.85	
Stand-by Power (W)	0.9	0	0		
nstallation Height (mm)					
Ainimum Distance from Cooking Top ELECTRIC	50	50	0	65	
Minimum Distance from Cooking Top GAS	65	65	5	65	
Dimensions (mm)					
Vidth	1000	870	880	1199	
Depth	700	696	95	499	
Height Max	967	1160	407	311	
Height of Body	75	60	407	311	
Differ	, <u>,</u>		107	511	
Air Outlet	150	150	150	150	

	DCE5980HM	
Overview		
Control Type	Electronic Push Buttons	
Hob ² Hood	•	
Fan Speed	3+boost	
Breeze Function		
Lights	LED	
No. of Lamp x W	4	
Charcoal Filter	2; Accessory	
Charcoal Filter Type	EFF62	
Ultra Charcoal Filter		
Ultra Charcoal Filter Type		
Grease Filter Type	Aluminium Cassette	St
Ducted Maximum (ca. m3/h)	560	
Ducted Boost (ca. m3/h)	710	
Noise (Max. Setting) Ducted (dB(A))	70	
Recirculation Maximum (ca. m3/h)	350	
Recirculation Boost (ca. m3/h)	370	
Noise (Max. Setting) Recirculation (dB(A))	70	
Annual Energy Consumption, kWh/annum	60.6	
Energy Efficiency Class	A	
Fluid Dynamic Efficiency Class	A	
Lighting Efficiency Class	A	
Grease Filter Efficiency	55.1	
Grease Filter Efficiency Class	E	
Off Mode Power (W)	0.85	
Stand-by Power (W)	0	
Installation Height (mm)		
Minimum Distance from Cooking Top – Electric	65	
Minimum Distance from Cooking Top – Gas	65	
Dimensions (mm)		
Width	900	
Depth	500	
Height Max	311	
Height of Body	311	
Other		
Air Outlet	150	
•••••••••••••••••••••••••••••••••••••••	•••••••••••••••••••••••••••••••••••••••	•••••



DVK6980HB	DVK6680HB	DVB4850B/M
Touch on Glass	Touch on Glass	Mechanical Push Buttons
•	•	
3+2 Boost	3+2 Boost	3
•	•	
Dimmable LED	Dimmable LED	LED Spotlight
2 x 11 W	2 x 11 W	2
2; Included	2; Included	2; Included
EFF62	EFF62	TYPE57
1; Accessory	1; Accessory	
SUPCHARCF1	SUPCHARCF1	••••••
Stainless Steel Design Filter	Stainless Dteel Design Filter	Aluminium Cassette
370	370	647
720	720	-
54	54	67
290	290	432
440	440	-52
70	70	74
44.9	44.9	54.6
44.9 A+	44.9 A+	B
		•••••••••••••••••••••••••••••••••••••••
A A	Α	A
	A	
55.1	55.1	66
E	E 0.85	D 0
	0.85	
0		0
50	50	45
50	50	45
898	598	800
396	396	335
145	1445	
465	465	477
150	150	150

HOODS

Width Depth Height Max Height of Body **Other**

Air Outlet

HOODS				
	DVB4550B/M	DBK7990HG	DBE6980HM	DBE6780HM
Overview				
Control Type	Mechanical Push Buttons	Touch on Glass	Touch on Glass	Touch on Glass
Hob ² Hood		•	•	•
Fan Speed	3	3+2 Boost	3+2 Boost	3+2 Boost
Breeze Function		•	•	•
Lights	LED Spotlight	Dimmable LED Stripe	Dimmable Squared LED	Dimmable Squared LED
No. of Lamp x W	2	2 x 3.5 W	2 x 2 W	2 x 2 W
Charcoal Filter	2; Included	1; Included	1; Included	1; Included
Charcoal Filter Type	TYPE57	TYPE15	EFF72	EFF72
Ultra Charcoal Filter		1; Accessory	1; Accessory	1; Accessory
Ultra Charcoal Filter Type		SUPCHARC-E	SUPCHARC-F	SUPCHARC-F
Grease Filter Type	Aluminium Cassette	Aluminium Cassette	Stainless Steel Design Filter	Stainless Steel Design Filter
Ducted Maximum (ca. m3/h)	647	400	340	340
Ducted Boost (ca. m3/h)	-	801	710	710
Noise (Max. Setting) Ducted (dB(A))	67	54	54	54
Recirculation Maximum (ca. m3/h)	432	300	320	320
Recirculation Boost (ca. m3/h)		500	520	520
Noise (Max. Setting) Recirculation (dB(A))	74	75	67	67
Annual Energy Consumption, kWh/annum	54.6	35.1	44.6	44.6
Energy Efficiency Class	В	A++	A+	A+
Fluid Dynamic Efficiency Class	A	A	A	A
Lighting Efficiency Class	D	В	A	Α
Grease Filter Efficiency	66	76	85.1	85.1
Grease Filter Efficiency Class	D	С	В	B
Off Mode Power (W)	0	0	0.85	0.85
Stand-by Power (W)	0	0.49		
Installation Height (mm)				
Minimum Distance from Cooking Top – Electric	45	50	50	50
Minimum Distance from Cooking Top – Gas	45	65	65	65
Dimensions (mm)				

335

	DBE6680HM	DBB5960HM	DBB5760HM	DBB5660HM
Overview				
Control Type	Touch on Glass	Touch on Glass	Touch on Glass	Touch on Glass
Hob ² Hood	•	•	•	•
Fan Speed	3+2 Boost	3+boost	3+boost	3+boost
Breeze Function	•	•	•	•
Lights	Dimmable Squared LED	LED	LED	LED
No. of Lamp x W	2 x 2 W	2 x 2.5 W	2	2 x 2.5 W
Charcoal Filter	1; Included	1; Included	1: Included	1; Included
Charcoal Filter Type	EFF72	TYPE15	TYPE15	TYPE15
Ultra Charcoal Filter	1; Accessory	1: Accessory	1: Accessory	1: Accessory
Ultra Charcoal Filter Type	SUPCHARC-F	SUPCHARC-E	SUPCHARC-E	SUPCHARC-E
Grease Filter Type	Stainless Steel Design Filter			
Ducted Maximum (ca. m3/h)	340	352	352	352
Ducted Boost (ca. m3/h)	710	779	779	779
Noise (Max. Setting) Ducted (dB(A))	54	54	54	54
Recirculation Maximum (ca. m3/h)	320	302	302	302
Recirculation Boost (ca. m3/h)	520	524	524	524
Noise (Max. Setting) Recirculation (dB(A))	67	75	55	75
Annual Energy Consumption, kWh/annum	44.6	57.7	57.7	57.7
Energy Efficiency Class	A+	A	A	A
Fluid Dynamic Efficiency Class	A	A	A	A
Lighting Efficiency Class	A	A	A	A
Grease Filter Efficiency	85.1	76	76	76
Grease Filter Efficiency Class	В	C	C	С
Off Mode Power (W)	0.85			
Stand-by Power (W)		0.49	0.49	0.49
Installation Height (mm)				
Minimum Distance from Cooking Top – Electric	50	50	50	50
Minimum Distance from Cooking Top – Gas	65	65	65	65
Dimensions (mm)				
Width	598	898	698	898
Depth	470	500	500	500
Height Max	920	1070	1070	1070
Height of Body	60	60	60	60
Other				
Air Outlet	150	150	150	150

HOODS

HOODS		-	-	
	DKB5960HM	DKB5660HM	DKB4950M	DKB4650M
Overview				
Control Type	Touch on Glass	Touch on Glass	Mechanical Push Buttons	Mechanical Push Buttons
Hob ² Hood	•	•		
Fan Speed	3+boost	3+boost	3	3
Breeze Function	•	•		
Lights	LED	LED	LED spotlight	LED Spotlight
No. of Lamp x W	2 x 2.5 W	2 x 2.5 W	2	2
Charcoal Filter	1; Included	1; Included	1; Included	1; Included
Charcoal Filter Type	TYPE15	TYPE15	TYPE15	TYPE15
Ultra Charcoal Filter	1; Accessory	1; Accessory	1; Accessory	1; Accessory
Ultra Charcoal Filter Type	SUPCHARC-E	SUPCHARC-E	SUPCHARC-E	SUPCHARC-E
Grease Filter Type	Stainless Steel Design Filter	Stainless Steel Design Filter	Aluminium Cassette	Aluminium Cassette
Ducted Maximum (ca. m3/h)	352	352	603	603
Ducted Boost (ca. m3/h)	779	779	-	•
Noise (Max. Setting) Ducted (dB(A))	54	54	69	69
Recirculation Maximum (ca. m3/h)	302	302	400	400
Recirculation Boost (ca. m3/h)	524	524	-	
Noise (Max. Setting) Recirculation (dB(A))	75	75	75	75
Annual Energy Consumption, kWh/annum	61	61	81.9	81.9
Energy Efficiency Class	A	A	В	В
Fluid Dynamic Efficiency Class	A	A	В	В
Lighting Efficiency Class	A	A	F	F
Grease Filter Efficiency	76	76	76	76
Grease Filter Efficiency Class	С	С	С	С
Off Mode Power (W)			•	
Stand-by Power (W)	0.99	0.99	•	
Installation Height (mm)			•	•
Minimum Distance from Cooking Top – Electric	50	50	50	50
Minimum Distance from Cooking Top – Gas	65	65	65	65
Dimensions (mm)				
Width	598	598	898	598
Depth	500	500	500	500
Height Max	1090	1090	1090	1090
Height of Body	140	140	40	40
Other				
	15.0	15.0	150	150
Air Outlet	150	150	150	150



	DTBJ0JZIM
Overview	
Control Type	Mechanical Push Butto
Hob ² Hood	
Fan Speed	3
Breeze Function	
Lights	LED Spotlight
No. of Lamp x W	2
Charcoal Filter	Included
Charcoal Filter Type	ECFB01
Ultra Charcoal Filter	Accessory
Ultra Charcoal Filter Type	SUPCHARC-E
Grease Filter Type	Aluminium Cassette
Ducted Maximum (ca. m3/h)	603
Ducted Boost (ca. m3/h)	
Noise (Max. Setting) Ducted (dB(A))	69
Recirculation Maximum (ca. m3/h)	399
Recirculation Boost (ca. m3/h)	
Noise (Max. Setting) Recirculation (dB(A))	73
Annual Energy Consumption, kWh/annum	99.2
Energy Efficiency Class	С
Fluid Dynamic Efficiency Class	D
Lighting Efficiency Class	A
Grease Filter Efficiency	65.1
Grease Filter Efficiency Class	D
Off Mode Power (W)	
Stand-by Power (W)	
Installation Height (mm)	
Minimum Distance from Cooking Top – Electric	50
Minimum Distance from Cooking Top – Gas	65
Dimensions (mm)	
Width	600
Depth	500
Height Max	1020
Height of Body	53
Other	· · · · · · · · · · · · · · · · · · ·
Air Outlet	150
	•••••••••••••••••••••••••••••••••••••••

	-	
	DPB3931S	DPB3631S
uttons	Mechanical Push Buttons	Mechanical Push Buttons
	3	3
t	LED 2	LED 2
	2 2; Included ECFB03	2; Included ECFB03
ette	Aluminium Cassette 370	Aluminium Cassette 370
	68 125	68 125
	69 489 C D E 721 D	69 489 C D E 721 D
	50	<u>50</u> 65
	65 898 280 170 40	65 598 280 180 40
	120	120

HOODS



DGB3850M DEB2631S

Overview		
Control Type	Electronic Push Buttons	Electronic Slider
Hob ² Hood		
Fan Speed	4	Continuous+Boost
Breeze Function		
Lights	LED	LED
No. of Lamp x W	2	2
Charcoal Filter	2; Included	1; Included
Charcoal Filter Type	ECFB02	Type 57
Ultra Charcoal Filter	Accessory	-
Ultra Charcoal Filter Type	ECFBLL01	-
Grease Filter Type	Stainless Steel	Aluminium Cassette
Ducted Maximum (ca. m3/h)	600	352
Ducted Boost (ca. m3/h)		
Noise (Max. Setting) Ducted (dB(A))	63	62
Recirculation Maximum (ca. m3/h)	350	232
Recirculation Boost (ca. m3/h)		
Noise (Max. Setting) Recirculation (dB(A))	70	67
Annual Energy Consumption, kWh/annum	96.5	106.1
Energy Efficiency Class	C	D
Fluid Dynamic Efficiency Class	D	D
Lighting Efficiency Class	A	A
Grease Filter Efficiency	83.5	66
Grease Filter Efficiency Class	С	D
Off Mode Power (W)		
Stand-by Power (W)		
Installation Height (mm)		
Minimum Distance from Cooking Top – Electric	50	50
Minimum Distance from Cooking Top – Gas	65	70
Dimensions (mm)		
Width	700	598
Depth	285	270
Height Max	245	400
Height of Body	245	400
Other		
Air Outlet	150	120

DISHWASHERS




Capacity (Number of IEC Place Settings)		3
XXL Tub (Large Interior)		•
Control Type	louch	Control
Number of Temperatures		7
Number of Programmes Automatic 45°C–70°C Programme	•••••	•
Quickwash 60°C, 30 Min Programme		•
Eco Programme		•
160 min programme		•
90 min programme		•
60 min programme		•
Maintenance Cycle / Machine care		•
Extra silent Programme		
Glasscare Option		•
Xtra Power Option		•
AirDry Technology (Automatic door opening)		
Glass care, Soft Spikes Glass care, Soft Grips		
	•••••	•
DelayStart Time Remaining		
ComfortLift		•
Satellite spray arm		•
Ceiling spray arm		•
Height adjustable upper basket		•
Foldable plate racks - bottom basket		•
Foldable cup shelves - bottom basket		•
Removable cutlery drawer		•
Moveable cutlery basket		
Lower basket glass holder		
SprayZone		
Time beam - spotlight		•
Light beam - spotlight		
Hinges	Silding	Hinges
Dimensions		
Appliance Dimensions	0	10
Height Width		
		50
Depth Aperture dimensions		
Built-in Height	8	20
Built-in Width		0
Built-in Depth		
Furniture door dimensions		••••••
Door Height (Min – Max)	670	-820
Door Weight (Min – Max)	1.5	-10
Performance		
Declared Programme	EC	0 50
Energy Efficiency Class	A+	
Energy Efficiency Index		
Annual Energy Consumption		34
Annual Water Consumption		
Energy Consumption Water Consumption		32 I 11
Drying Performance	· · · · · · · · · · · · · · · · · · ·	· · · · · · · · · · · · · · · · · · ·
Maximum Noise Level		<u>`</u>
Cleaning Performance		4
Programme Time (Min)	2	
Stand-by Power (W)	(
Off Mode Power (W)	C	.5
Left-on Mode Power (W)		5
Left-on Mode Duration Min		1
Auto Switch Off (End of Programme)		•
Other		
Voltage	220	
Frequency	50	/60
Connected Load	1550 1	-2200
Fuse Rating Minimum Water Pressure 1 bar/15 psi		•
Inlet Hose with 3/4" BSP Thread Hose Connection	·····	•
Water Softener		•
Water Supply (Max. 60°)	Cold	or Hot
Salt Refill Indicator		
		•
Rinse Aid Refill Indicator		
Rinse Aid Refill Indicator Water Hardness Setting		•
Rinse Aid Refill Indicator Water Hardness Setting Top and side fixing brackets		

	6	
and the second second		
FSK84707P	FSK63807P	FSK63737P
15	13	15
• Touch Control	• Touch Control	• Touch Control
4	4	4
	7	7
•	•	•
•	•	•
•	•	•
•	•	•
•	•	•
•	•	•
•	•	•
•	•	•
•	•	•
•	•	•
•	•	•
•	•	•
•	•	•
•	•	•
•	•	•
•	•	•
•	•	•
•	•	•
•	•	•
		٠
•		
	•	•
Sliding Hinges	Sliding Hinges	Sliding Hinges
-		
818	818	818
596	596	596
550	550	550
820	820	820
900	900 600	900
900 600	600	600
670-820	670-820	670-820
1.5-10	1.5-10	1.5-10
FCO FO	FCO F0	FCO F0
ECO 50	ECO 50	ECO 50
A+++	A+++	A+++
44.9 217	49.8 234	49.8 241
3080	3080	3080
0.761	0.821	0.846
11	11	11
	A	Α
A 42	44	A 44
A	Α	A
241	240	225
0.1	0.1	0.1
0.5		0.5
F	0.5	0.5
5	5	5
5	5 1	<u>5</u> 1
5	5	5
5	5. 1. •	5 1 •
5 • 220-240	5 1 • 220-240	5 1 • 220-240
5 • 220-240 50/60	5 1 • 220-240 50/60	5 1 • 220-240 50/60
5 • 220-240 50/60 1550-2200	5 1 • 220-240 50/60 1550-2200	5 1 • 220-240 50/60 1550-2200
5 • 220-240 50/60	5 1 • 220-240 50/60	5 1 • 220-240 50/60
5 • 220-240 50/60 1550-2200 10	5 1 • 220-240 50/60 1550-2200	5 1 • 220-240 50/60 1550-2200
5 • 220-240 50/60 1550-2200 10 •	5 1 • 220-240 50/60 1550-2200 10 •	5 1 • 220-240 50/60 1550-2200 10 •
5 220-240 50/60 1550-2200 10 Cold or Hot	5 1 • 220-240 50/60 1550-2200 10 • • • Cold or Hot	5 1 • 220-240 50/60 1550-2200
5 • 220-240 50/60 1550-2200 10 •	5 1 • 220-240 50/60 1550-2200 10 •	5 1 • 220-240 50/60 1550-2200 10 •
5 • 220-240 50/60 1550-2200 10 • • • Cold or Hot	5 1 • 220-240 50/60 1550-2200 10 • • • Cold or Hot	5 1 • 220-240 50/60 1550-2200 10 • • Cold or Hot
5 220-240 50/60 1550-2200 10 Cold or Hot	5 1 • 220-240 50/60 1550-2200 10 • • • Cold or Hot	5 1 • 220-240 50/60 1550-2200 10 • • Cold or Hot
5 220-240 50/60 1550-2200 10 Cold or Hot	5 1 • 220-240 50/60 1550-2200 10 • • • Cold or Hot	5 1 • 220-240 50/60 1550-2200 10 • • Cold or Hot

DISHWASHERS



	101020071	I OROL / I/ L	I SKSZOW Z	100120072
apacity (Number of IEC Place Settings)	13			13
(L Tub (Large Interior)	•			
ontrol Type	Touch control	Touch control	Touch control	Touch control
umber of Temperatures	4	3	3	2
umber of Programmes	7	7	7	5
utomatic 45°C–70°C Programme	٠	•	•	•
uickwash 60°C, 30 Min Programme	•	•	•	•
o Programme	•	•	•	•
0 min programme	•	•	•	
D min programme	•	•	•	•
	•			
0 min programme				
laintenance Cycle / Machine care	•	•	•	•
xtra silent Option		•••••••••••••••••••••••••••••••••••••••		
lasscare Option	•	•	•	••••••
tra Power Option	•	•	•	•
prayZone Option	•			•••••••••••••••••••••••••••••••••••••••
irDry Technology (Automatic door opening)	•	•	•	•
lass care, Soft Spikes	•	•	•	
lass care, Soft Grips	•			
elayStart	•	•	•	•
ime Remaining	•	•	•	•
atellite spray arm	•	•	•	•
eiling spray arm	•	•		•
leight adjustable upper basket	•	•	•	•
oldable plate racks - bottom basket	-	•	•	•••••••••••••••••••••••••••••••••••••••
oldable cup shelves - bottom basket	•	•	•	
emovable cutlery drawer		•	•	
loveable cutlery basket	•		•••••••••••••••••••••••••••••••••••••••	•
ower basket glass holder		•	•	
prayZone	•			
ime beam - spotlight				
ight beam - spotlight	•	•	•	••••••
·*·	Sliding Hinges	Sliding Hinges	Sliding Hinges	Sliding Hinges
inges •	Siluling Filinges	Siluling Filinges	Siluling Hinges	Siluling minges
imensions				
ppliance Dimensions				
leight	818	818	818	818
/idth	596	596	596	596
lepth	550	550	550	550
perture dimensions				
uilt-in Height	820	820	820	820
uilt-in Width	900	880	880	880
uilt-in Depth	600	600	600	600
urniture door dimensions	000			
Door Height (Min – Max)	670-820	645-776	645-776	645-776
Door Weight (Min – Max)				•••••••••••••••••••••••••••••••••••••••
	1.5-10	2.0-10	2.0-10	2.0-10
erformance				
eclared Programme	ECO 50	ECO 50	ECO 50	ECO 50
nergy Efficiency Class	A++	A++	A++	A++
nergy Efficiency Index	55.8	55.8	55.8	55.8
nnual Energy Consumption	262	266	262	262
nnual Water Consumption	2940	2940	2772	2772
nergy Consumption	0.921	0.935	0.921	0.921
/ater Consumption	10.5	10.5	9.9	9.9
rying Performance	A			A.
	44	44		
aximum Noise Level	••••••		•••••••••••••••••••••••••••••••••••••••	46
eaning Performance	A	A	A	A
ogramme Time (Min)	240	240	240	240
and-by Power (W)	0.1	0.5	0.5	0.5
ff Mode Power (W)	0.5	0.5	0.5	0.5
eft-on Mode Power (W)	5	5	5	
eft-on Mode Duration Min	5	1	1	1
uto Switch Off (End of Programme)	•	•	•	•
ther				•••••••••••••••••••••••••••••••••••••••
bltage	200-240	220-240	200-240	200-240
equency	50/60	50/60	50/60	50/60
onnected Load	1550-2200	1550-2200	1550-2200	1550-2200
ise Rating	10	10	10	10
inimum Water Pressure 1 bar/15 psi	•	•	•	•
let Hose with 3/4" BSP Thread Hose Connection	•	•	•	•
'ater Softener	•	•	•	•
'ater Supply (Max. 60°)	Cold or Hot	Cold or Hot	Cold or Hot	Cold or Hot
alt Refill Indicator	•	•	•	•
	•••••	•	•	•
	•		-	· · · · · ·
inse Aid Refill Indicator	•	•	•	•
inse Aid Refill Indicator /ater Hardness Setting	•	•	•	•
inse Aid Refill Indicator Vater Hardness Setting op and side fixing brackets Vorktop steam protection	•	•	•	•



Capacity (Number of IEC Place Settings)		••••••
(XL Tub (Large Interior)	• Electronic	
Control Type Jumber of Temperatures	EIECTIONIC 7.	••••••
Number of Programmes		•••••
Automatic 45°C-70°C Programme	•	•••••
Quickwash 60°C, 30 Min Programme	•	
Eco Programme	•	
ntensive Advanced 70°C Programme	•	
Maintenance Cycle / Machine care		
Glass 45°C Programme	•	••••••
Extra silent Programme	•	
ProZone Programme		••••••
ExtraHygiene Option		••••••
TimeSaver Option XtraDry Option	•	••••••
XtraDry Option AirDry Technology (Automatic door opening)	•	••••••
Glass care, Soft Spikes		
Glass care, Soft Grips		
DelayStart	•	••••••
Time Remaining	•	
Satellite spray arm	•	
Ceiling spray arm	•	
Height adjustable upper basket		•••••
Foldable plate racks - bottom basket		
Foldable cup shelves - bottom basket		
Removable cutlery drawer Moveable cutlery basket		•••••
Moveable cutlery basket Lower basket glass holder	-	••••••
Lower basket glass holder SprayZone		
sprayzone Time beam - spotlight		
Light beam - spotlight		•••••
Hinges	Double Eulcrum	Γ
Dimensions	2000.0.010 000	L
Appliance Dimensions		
Height	818	
	596	
Depth		
Aperture dimensions		
Built-in Height		
Built-in Width	600	
Built-in Depth	570	
Furniture door dimensions		
Door Height (Min – Max)	5/0-655	••••••
Door Weight (Min – Max) Porformance	1.5-8.0	•••••
Performance	500.50	
Declared Programme	ECO 50	••••••
Enorgy Efficiency Class	Α	
Energy Efficiency Class	A++	
Energy Efficiency Index	A++ 55.9	••••••
Energy Efficiency Index Annual Energy Consumption	A++ 55.9 262	••••••
Energy Efficiency Index Annual Energy Consumption Annual Water Consumption	A++ 55.9 262 2940	
Energy Efficiency Index Annual Energy Consumption Annual Water Consumption Energy Consumption	A++ 55.9 262 2940	
Energy Efficiency Index Annual Energy Consumption Annual Water Consumption Energy Consumption Water Consumption	A++ 55.9 262 2940 0921 10.5	
Energy Efficiency Index Annual Energy Consumption Annual Water Consumption Energy Consumption Water Consumption Drying Performance	A++ 55.9 262 2940 0921 10.5	
Energy Efficiency Index Annual Energy Consumption Annual Water Consumption Energy Consumption Water Consumption Drying Performance Maximum Noise Level Cleaning Performance	A++ 55.9 262 2940 0921 10.5 A	
Energy Efficiency Index Annual Energy Consumption Annual Water Consumption Energy Consumption Water Consumption Drying Performance Maximum Noise Level Cleaning Performance Programme Time (Min)	A++ 55.9 262 294.0 0.921 10.5 A 44 44 A 233	
Energy Efficiency Index Annual Energy Consumption Annual Water Consumption Benergy Consumption Water Consumption Drying Performance Maximum Noise Level Cleaning Performance Programme Time (Min) Stand-by Power (W)	A++ 55.9 262 2940 0921 10.5 A 44 44 A 233 01	
Energy Efficiency Index Annual Energy Consumption Annual Water Consumption Energy Consumption Water Consumption Drying Performance Maximum Noise Level Cleaning Performance Programme Time (Min) Stand-by Power (W) Off Mode Power (W)	A++ 55.9 262 2940 0921 10.5 A 44 A 233 01 01 01	
Energy Efficiency Index Annual Energy Consumption Annual Water Consumption Energy Consumption Water Consumption Drying Performance Maximum Noise Level Cleaning Performance Programme Time (Min) Stand-by Power (W) Off Mode Power (W) Left-on Mode Power (W)	A++ 55.9 262 2940 0.921 10.5 A 44 44 A 233 0.1 0.1 0.1 5	
Energy Efficiency Index Annual Energy Consumption Annual Water Consumption Energy Consumption Water Consumption Drying Performance Maximum Noise Level Cleaning Performance Programme Time (Min) Stand-by Power (W) Off Mode Power (W) Left-on Mode Power (W) Left-on Mode Duration Min	A++ 55.9 262 2940 0921 10.5 A 44 44 A 233 01 01 01 5 5	
Energy Efficiency Index Annual Energy Consumption Annual Water Consumption Energy Consumption Water Consumption Drying Performance Maximum Noise Level Cleaning Performance Programme Time (Min) Stand-by Power (W) Off Mode Power (W) Left-on Mode Power (W) Left-on Mode Duration Min Auto Switch Off (End of Programme)	A++ 55.9 262 2940 0.921 10.5 A 44 44 A 233 0.1 0.1 0.1 5	
Energy Efficiency Index Annual Energy Consumption Annual Water Consumption Energy Consumption Water Consumption Drying Performance Maximum Noise Level Cleaning Performance Programme Time (Min) Stand-by Power (W) Off Mode Power (W) Left-on Mode Power (W) Left-on Mode Power (W) Left-on Mode Duration Min Auto Switch Off (End of Programme) Other	A++ 55.9 262 294.0 0.921 10.5 A 44 A 233 0.1 0.1 0.1 5 5 •	
Energy Efficiency Index Annual Energy Consumption Annual Water Consumption Benergy Consumption Water Consumption Drying Performance Maximum Noise Level Cleaning Performance Programme Time (Min) Stand-by Power (W) Off Mode Power (W) Diff Mode Power (W) Left-on Mode Power (W) Left-on Mode Duration Min Auto Switch Off (End of Programme) Other Voltage	A++ 55.9 262 2940 0.921 10.5 A 44 A 233 0.1 0.1 5 5 • 220-240	
Energy Efficiency Index Annual Energy Consumption Annual Water Consumption Benergy Consumption Water Consumption Drying Performance Maximum Noise Level Cleaning Performance Programme Time (Min) Stand-by Power (W) Off Mode Power (W) Diff Mode Power (W) Left-on Mode Power (W) Left-on Mode Duration Min Auto Switch Off (End of Programme) Other Voltage Frequency	A++ 55.9 262 294.0 0.921 10.5 A 44 A 233 0.1 0.1 0.1 5 5 5 • 220-240 50 1950	
Energy Efficiency Index Annual Energy Consumption Annual Water Consumption Energy Consumption Water Consumption Drying Performance Maximum Noise Level Cleaning Performance Programme Time (Min) Stand-by Power (W) Off Mode Power (W) Left-on Mode Power (W) Left-on Mode Power (W) Left-on Mode Duration Min Auto Switch Off (End of Programme) Other Voltage Frequency Connected Load	A++ 55.9 262 294.0 0.921 10.5 A 44 A 233 0.1 0.1 0.1 5 5 5 • 220-240 50 1950	
Energy Efficiency Index Annual Energy Consumption Annual Water Consumption Water Consumption Water Consumption Drying Performance Maximum Noise Level Cleaning Performance Programme Time (Min) Stand-by Power (W) Off Mode Power (W) Left-on Mode Power (W) Left-on Mode Duration Min Auto Switch Off (End of Programme) Other Voltage Frequency Connected Load Fuse Rating	A++ 55.9 262 294.0 0.921 10.5 A 44 A 233 0.1 0.1 0.1 5 5 - - 220-240 50 1950 10 10 10 10 10 10 10 10 10 1	
Energy Efficiency Index Annual Energy Consumption Annual Water Consumption Water Consumption Water Consumption Drying Performance Maximum Noise Level Cleaning Performance Programme Time (Min) Stand-by Power (W) Off Mode Power (W) Left-on Mode Power (W) Left-on Mode Duration Min Auto Switch Off (End of Programme) Other Voltage Frequency Connected Load Frequency Connected Load Fuse Rating Minimum Water Pressure 1 bar/15 psi	A++ 55.9 262 294.0 0.921 10.5 A 44 A 233 0.1 0.1 0.1 5 5 5 • 220-240 50 1950	
Energy Efficiency Index Annual Energy Consumption Energy Consumption Energy Consumption Water Consumption Drying Performance Maximum Noise Level Cleaning Performance Programme Time (Min) Stand-by Power (W) Off Mode Power (W) Left-on Mode Power (W) Left-on Mode Power (W) Left-on Mode Duration Min Auto Switch Off (End of Programme) Other Voltage Frequency Connected Load Fuse Rating Minimum Water Pressure 1 bar/15 psi Inlet Hose with 3/4' BSP Thread Hose Connection	A++ 55.9 262 294.0 0.921 10.5 A 44 A 233 0.1 0.1 5 5 • 220-240 50 1950 10 •	
Energy Efficiency Index Annual Energy Consumption Energy Consumption Energy Consumption Water Consumption Drying Performance Maximum Noise Level Cleaning Performance Programme Time (Min) Stand-by Power (W) Off Mode Power (W) Left-on Mode Power (W) Left-on Mode Power (W) Left-on Mode Duration Min Auto Switch Off (End of Programme) Other Voltage Frequency Connected Load Fuse Rating Minimum Water Pressure 1 bar/15 psi Inlet Hose with 3/4' BSP Thread Hose Connection Water Softener	A++ 55.9 262 2940 0921 10.5 A 44 A 233 0.1 0.1 5 5 5 • • 220-240 50 1950 10 •	
Energy Efficiency Index Annual Energy Consumption Annual Water Consumption Energy Consumption Water Consumption Drying Performance Maximum Noise Level Cleaning Performance Programme Time (Min) Stand-by Power (W) Off Mode Power (W) Left-on Mode Duration Min Auto Switch Off (End of Programme) Other Voltage Frequency Connected Load Fuse Rating Minimum Water Pressure 1 bar/15 psi Inlet Hose with 3/4" BSP Thread Hose Connection Water Softener Water Softener Water Softener	A++ 55.9 262 294.0 0.921 10.5 A 44 A 233 0.1 0.1 5 5 • 220-240 50 1950 10 •	
Energy Efficiency Index Annual Energy Consumption Annual Water Consumption Water Consumption Water Consumption Drying Performance Maximum Noise Level Cleaning Performance Programme Time (Min) Stand-by Power (W) Off Mode Power (W) Left-on Mode Power (W) Left-on Mode Power (W) Left-on Mode Duration Min Auto Switch Off (End of Programme) Other Voltage Frequency Connected Load Frequency Connected Load Frequency Minimum Water Pressure 1 bar/15 psi Inlet Hose with 3/4" BSP Thread Hose Connection Water Softener Water Softener Water Softener Water Supply (Max. 60") Salt Refill Indicator Rinse Aid Refill Indicator	A++ 55.9 262 2940 0.921 10.5 A 44 A 233 01 0.1 5 5 • 220-240 50 1950 10 • Cold or Hot •	
Energy Efficiency Index Annual Energy Consumption Annual Water Consumption Water Consumption Water Consumption Drying Performance Maximum Noise Level Cleaning Performance Programme Time (Min) Stand-by Power (W) Off Mode Power (W) Left-on Mode Power (W) Left-on Mode Power (W) Left-on Mode Duration Min Auto Switch Off (End of Programme) Other Voltage Frequency Connected Load Fuse Rating Minimum Water Pressure 1 bar/15 psi Inlet Hose with 3/4' BSP Thread Hose Connection Water Softener Water Supply (Max. 60°) Salt Refill Indicator Kinse Aid Refill Indicator Water Hardness Setting	A++ 55.9 262 2940 0.921 10.5 A 44 A 233 01 0.1 5 5 • 220-240 50 1950 10 • Cold or Hot •	
Frequency Connected Load	A++ 55.9 262 2940 0.921 10.5 A 44 44 A 233 0.1 0.1 5 5 5 • • 220-240 50 1950 10 • • Cold or Hot •	


FEB52600ZM	FSK73400P	FSB51400Z
13	9	9
• Electronic	Electronic	Electronic
4	4	4
5		5
•	•	•
•	•	•
•	•	•
•	•	•
	•	
	•	
•	•	
•	•	•
•	•	•
•	•	•
•	•	•
•	•	•
	•	
•	•	•
•	•	•
•	•	•
•	•	•
•		
Double Fulcrum	Sliding Hinges	Sliding Hinges
818	818	818
596	446	446
575	550	550
820-900	820-900	820-900
600	450	450
550	550	550
528-598	645-776	645-776 2.0-6.0kg
2.0-10.0	2.0-6.0KG	2.0-6.0kg
FCO F0	ECO 50	ECO 50
ECO 50 A++	A+++	A+
55.9	49.9	62.9
262 2775	176 2775	222 2775
0.921	0.625	0.778
9.9	9.9	9.9
A 47	A 44	A 47
47 A	44 A	4/ A
240	240	227
0.1 0.5	0.1 0.1	0.1 0.5
5	5	5
5 5	5 5	5 5
•	•	•
220-240	220-240	220-240
50	50/60	50
1950 10	1550-2200 10	1950 10
•	•	•
•	•	•
• Cold or Hot	• Cold or Hot	• Cold or Hot
•	•	•
•	•	•

•

DISHWASHERS






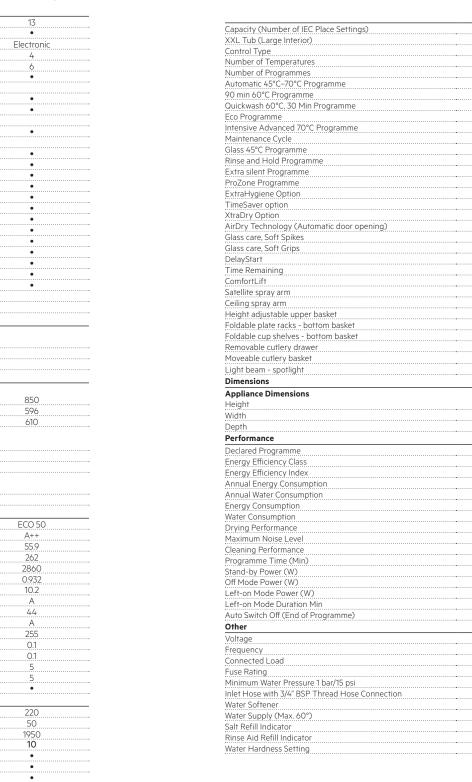

Capacity (Number of IEC Place Settings)	13	15	15	13
XXL Tub (Large Interior)	•	•	•	•
Control Type	Electronic	Touch Control	Electronic	Electronic
				• • • • • • • • • • • • • • • • • • • •
Number of Temperatures	5			4
Number of Programmes	10			
Automatic 45°C–70°C Programme	•	•	•	•
Quickwash 60°C, 30 Min Programme	•			
Eco Programme	•	•	•	•
	-			
Intensive Advanced 70°C Programme	•	•	•	•
Maintenance Cycle / Machine care	•			
Glass 45°C Programme	•	•	•	•
Extra silent Programme	•	•		
ProZone Programme	•	•	•	•
		•	•	•
TimeSaver Option	•	•••••••••••••••••••••••••••••••••••••••	•••••••••••••••••••••••••••••••••••••••	•
XtraDry Option	•	•	•	•
AirDry Technology (Automatic door opening)	•	•	•	•
Glass care, Soft Spikes	•	•	•	•
Glass care, Soft Grips	•	•	•	•
DelayStart	•	•	•••••••••••••••••••••••••••••••••••••••	•
	•		•	•
Time Remaining	•	•	•	•
Satellite spray arm	•	•	•	•
Ceiling spray arm	•	•	•	•
Height adjustable upper basket	•	•	•	•
Foldable plate racks - bottom basket	•	•	•	
	•	•	•••••••••••••••••••••••••••••••••••••••	•
Foldable cup shelves - bottom basket	•	•	•	•
Removable cutlery drawer	•	•	•	
Moveable cutlery basket		•	•	
Lower basket glass holder		•••••••••••••••••••••••••••••••••••••••		
SprayZone				
Time beam - spotlight				
Light beam - spotlight	•			
Hinges				
Dimensions				
Appliance Dimensions				
Height	850	850	850	850
Width	600	596	596	596
Depth	570	610	610	610
Aperture dimensions				
Built-in Height				
Built-in Width				
Built-in Depth				
		••••••		
Furniture door dimensions				
Door Height (Min – Max)				
Door Weight (Min – Max)				
Performance		••••	••••	•
Declared Programme	ECO 50	ECO 50	ECO 50	ECO 50
Energy Efficiency Class	A++	A+++	A+++	A++
Energy Efficiency Index	55.9	49.9	49.9	55.9
Annual Energy Consumption	262	241	241	262
Annual Water Consumption	3080	3080		
			3080	2860
Energy Consumption	0.961	0.857	0.857	0.932
Water Consumption			11	10.2
Drying Performance	A	A	A	A
Maximum Noise Level	44	42	44	44
Cleaning Performance	A	A	A	
				A
Programme Time (Min)	233	225	225	255
Stand-by Power (W)	0.1	0.1	0.1	0.1
Off Mode Power (W)	0.5	0.1	0.1	0.1
Left-on Mode Power (W)	5	5	5	5
Left-on Mode Duration Min				
	5		5	5
Auto Switch Off (End of Programme)	•	•	•	•
Other				
Voltage	220-240	220	220	220
Frequency	50	50	50	50
Connected Load	1950	1950	1950	1950
Fuse Rating	10		10	10
Minimum Water Pressure 1 bar/15 psi	•	•	•	•
Inlet Hose with 3/4" BSP Thread Hose Connection	•	•	•	٠
Water Softener	•	•	•	•
	Cold or Hot	Cold or Hot	Cold or Hot	Cold or Hot
Water Supply (Max. 60°)		•••••••••••••••••••••••••••••••••••••••		
Salt Refill Indicator	•	•	•	•
Rinse Aid Refill Indicator	•	•	•	•
Water Hardness Setting	•	•	•	•
Top and side fixing brackets				
TOP and side fixing biddkets				
Worktop steam protection				

Worktop steam protection

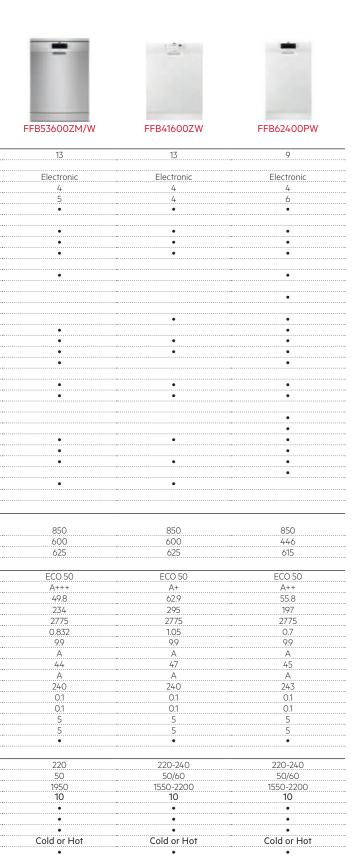

FFB53940ZW/M

14

Electronic

٠

٠

.

850

600

625

ECO 50

A+++

49.8

237

2940

0.832

Α

44

A

235

0.5 0.5

220-240


50

1950 **10**

٠

Cold or Hot


10.5

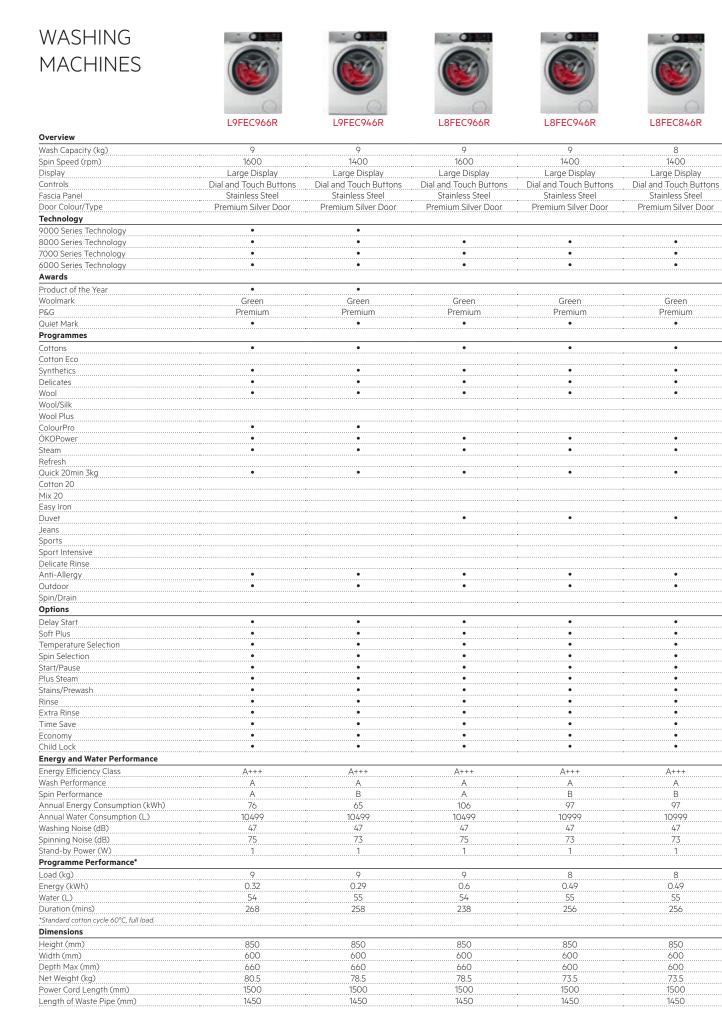



Overview	
Wash Capacity (kg)	9
Spin Speed (rpm)	1600
Display	Medium Display
Controls	Dial and Touch Buttons
Fascia Panel	Matte Silver
Door Colour/Type	Premium Silver Door
	Flethiutiti Silver Dool
Technology	
9000 Series Technology	
8000 Series Technology	•
7000 Series Technology	•
6000 Series Technology	•
Awards	••••••
Product of the Year	<u></u>
Woolmark	Green
P&G	Premium
Quiet Mark	•
Programmes	
Cottons	•
Cotton Eco	
	•
Synthetics	•
Delicates	•
Wool	•
Wool/Silk	
Wool Plus	
ColourPro	
ÖKOPower	•
	-
Steam	•
Refresh	
Quick 20min 3kg	•
Cotton 20	
Mix 20	
Easy Iron	
	•
Duvet	•
Jeans	••••••
Sports	
Sport Intensive	
Delicate Rinse	
Anti-Allergy	•
Outdoor	•
Spin/Drain	••••••
Options	
Delay Start	•
Soft Plus	•
Temperature Selection	•
Spin Selection	•
Start/Pause	•
Plus Steam	•
Stains/Prewash	•
Rinse	•
Extra Rinse	•
Time Save	•
E	•
Economy Child Lock	•
Child Lock	•
Energy and Water Performance	
Energy Efficiency Class	A+++
Wash Performance	A
	A
Annual Energy Consumption (kWh)	106
Spin Performance Annual Energy Consumption (kWh) Annual Water Consumption (L)	10499
Washing Noise (dB)	51
Spinning Noise (dB)	
Stand-by Power (W)	
Programme Performance*	
Load (kg)	9
Energy (kWh)	0.6
Water (L)	54
Duration (mins)	238
*Standard cotton cycle 60°C, full load.	
Dimensions	
Height (mm)	850
	600
Width (mm)	
Depth Max (mm)	660
Net Weight (kg)	78.5
	1500
Power Cord Length (mm)	1500

Overview

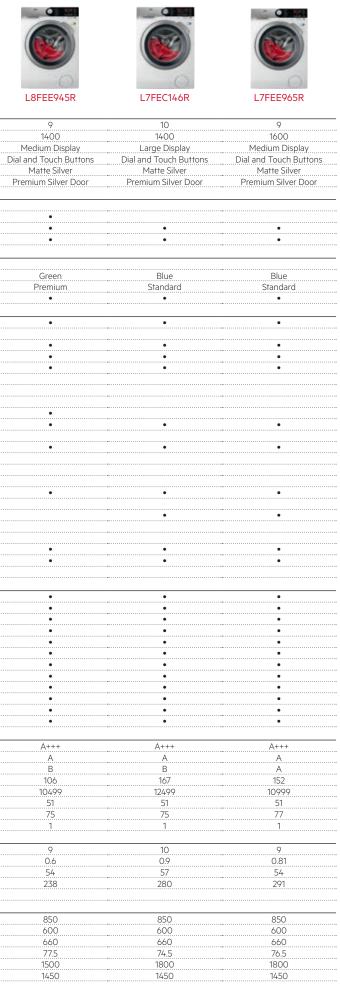

WASHING MACHINES









Overview

Display

Controls

Awards

Woolmark

Quiet Mark

Cotton Eco

Synthetics

Delicates

Wool/Silk

Wool Plus ColourPro

ÖKOPower

Steam

Refresh

Cotton 20

Mix 20

Duvet

Jeans

Sports

Anti-Allergy

Outdoor

Options Delay Start

Soft Plus

Start/Pause Plus Steam

Extra Rinse

Time Save

Economy

Child Lock

Load (kg)

Water (L)

Dimensions

Width (mm)

Rinse

Spin/Drain


Easy Iron

Wool

Cottons

P&G

Fascia Panel

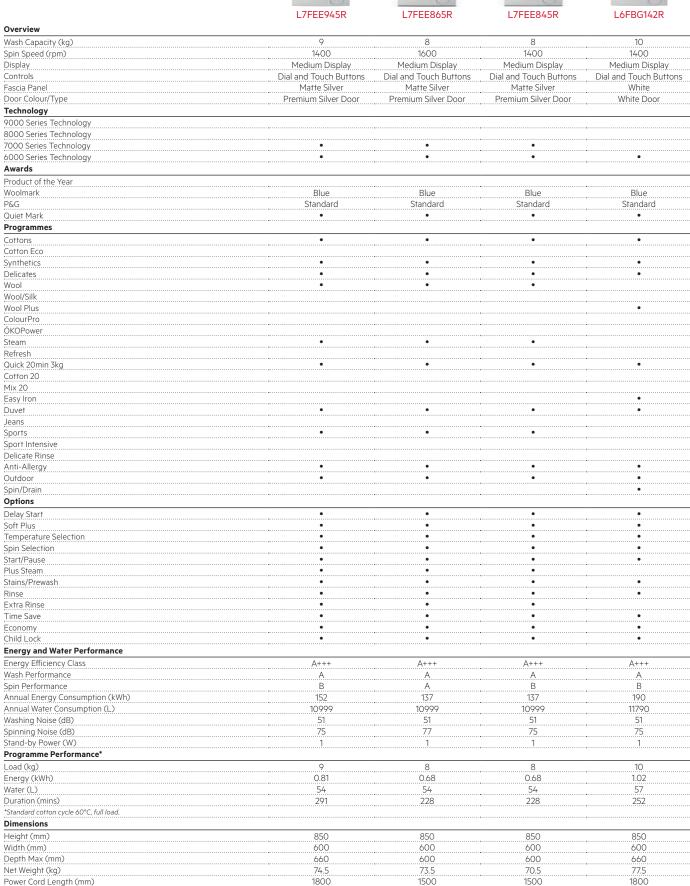


1450

1450

1450

1450

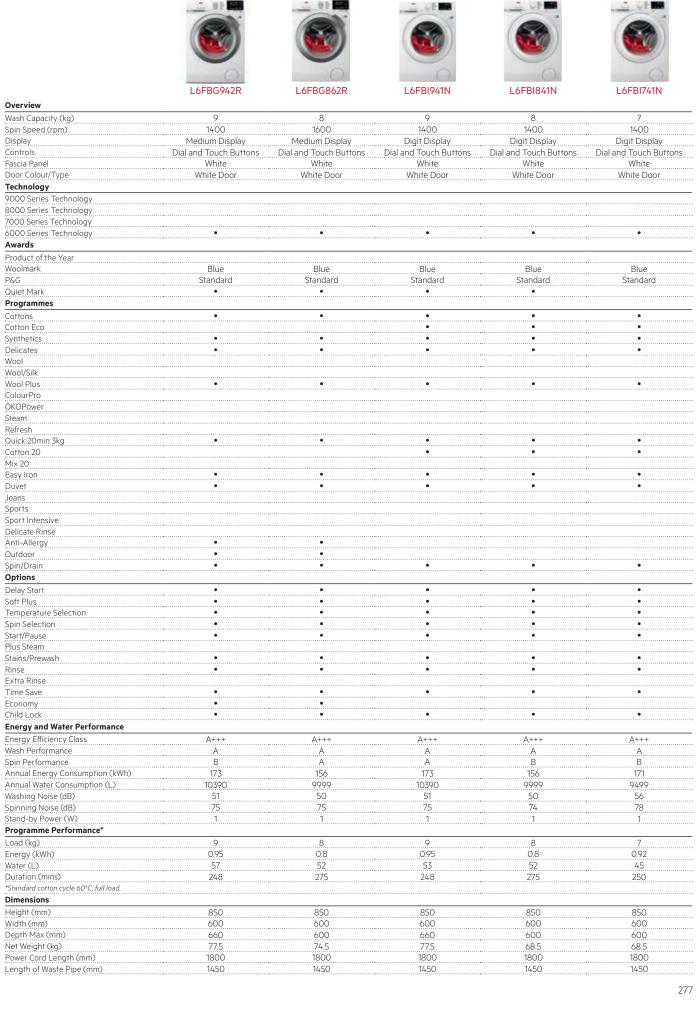

Length of Waste Pipe (mm)

WASHING MACHINES



L7FE7261BI

Overview	
Wash Capacity (kg)	7
Spin Speed (rpm)	1200
Display	Digit Display
Controls	Dial and Buttons
Fascia Panel	Silver
Door Colour/Type	White Door
Technology	
9000 Series Technology	
8000 Series Technology	
7000 Series Technology	•
6000 Series Technology	•
Awards	
Product of the Year Woolmark	Dhua
P&G	Blue
Quiet Mark	
Programmes	
Cottons	•
Cotton Eco	•
Synthetics	•
Delicates	•
Wool	
Wool/Silk	•
Wool Plus	
ColourPro	
ÖKOPower	
Steam	•
Refresh	
Quick 20min 3kg	•
Cotton 20	
Mix 20	
Easy Iron Duvet	
Jeans	•
Sports	•
Sport Intensive	
Delicate Rinse	•
Anti-Allergy	•
Outdoor	•
Spin/Drain	•
Options	
Delay Start	•
Soft Plus	•
Temperature Selection	•
Spin Selection	•
Start/Pause	•
Plus Steam	•
Stains/Prewash	•
Rinse Anti-grazza	•
Anti-crease Time Save	•
Economy	
Child Lock	•
Energy and Water Performance	
Energy Efficiency Class	A+++
Wash Performance	A
Spin Performance	B
Annual Energy Consumption (kWh)	174
Annual Water Consumption (L)	10499
Washing Noise (dB)	59
Spinning Noise (dB)	78
Stand-by Power (W)	0.75
Programme Performance*	
Load (kg)	7
Energy (kWh)	0.93
Water (L)	52
Duration (mins)	250
*Standard cotton cycle 60°C, full load.	
Dimensions	000
Height (mm)	820
Width (mm) Depth Max (mm)	
Net Weight (kg)	68.50
Power Cord Length (mm)	1500
Length of Waste Pipe (mm)	1450

TUMBLE DRYERS

Overview



Overview	
Dry Capacity (kg)	9
Display	Large Display
Controls	Dial and Touch Buttons
Fascia Panel	Stainless Steel
Door Colour/Type	Premium Silver Door
Technology	
8000 Series Technology	•
7000 Series Technology	•
6000 Series Technology	•
Awards	
W/a a lasa x l	Blue
Quiet Mark	
Programmes	•
Cottons	•
Cotton Eco	
Synthetics	•
Refresh	
Delicates	
Wool	•
Wool Refresh	
Mixed	•
Silk	•
Bedlinen	•
Easy Iron	•
Outdoor	•
Duvet	•
Sports	•
Active Wear	
Jeans	
Freshen Up	
Time 30	
Cottons – Extra Dry	•••••••••••••••••••••••••••••••••••••••
Cottons – Strong Dry	
Cottons – Cupboard Dry	
Cottons – Iron Dry	
Synthetics – Extra Dry	
Synthetics – Cupboard Dry	••••••
Synthetics – Iron Dry	
Options	
Delay Start	•
Delicate	
Drying Mode	
Anti-crease	•
Dryness Level	•
Time Drying	٠
Start/Pause	•
Child Lock	•
Quiet	•
Steam Level	
Sensitive	
Duzzor	······
Refresh	•
•••••••••••••••••••••••••••••••••••••••	-
Energy Performance	A
Energy Efficiency Class	A++
Annual Energy Consumption (kWh)	259
Drying Noise (dB)	65
Stand-by Power (W)	1.9
Dimensions	
Height (mm)	850
Width (mm)	600
Depth Max (mm)	665
Net Weight (kg)	49.96
Power Cord Length (mm)	1450



8	8 Medium Display Dial and Touch Buttons	0
		7
Large Display	Medium Display	Medium Display
Dial and Touch Buttons	Dial and Touch Buttons	Dial and Touch Buttons
Stainless Steel	Matte Silver	Matte Silver
Stainless Steel Premium Silver Door	Matte Silver Premium Black Door	Matte Silver Premium Silver Door
Premium Silver Door	Premium Black Door	Premium Silver Door
•	•	•
•	•	•
•	•	•
•••••	••••	
Blue	Blue	Blue
Dide		
••••		••••••
•	•	•
•	•	•
•••	••••	••••••
		•••••••••••••••••••••••••••••••••••••••
····	••••	••••••
•	•	•
•	•	•
•	•	•
•	•	•
-	-	-
•	•	•
•	•	•
•	•	•
•	•	•
	••••	
	••••	
·		•••••••••••••••••••••••••••••••••••••••
		•
•	•	•
•	•	•
•	•	•
-	-	
•	•	•
•	•	•
•	•	•
•	•	•
		•
		•••••••••••••••••••••••••••••••••••••••
		•••••••••••••••••••••••••••••••••••••••
		•
	••••	••••••
A++	A	A.: :
A++	A+++	A++
	176	259
66	65	65
1.9	1.9	1.9
050	252	050
850	850	850
	600	600
600	000	
	665	665
665	665	665
	665 4925 1450	665 49.96 1450

TUMBLE DRYERS















Overview



Overview				
Dry Capacity (kg)	8	8	8	8
Display	Medium Display	Medium Display	Medium Display	Medium Display
ontrols	Dial and Touch Buttons	Dial and Touch Buttons	Dial and Touch Buttons	Dial and Touch Button
ascia Panel	Matte Silver	White	White	White
oor Colour/Type	Premium Silver Door	Premium Silver Door	Premium Silver Door	Premium Silver Door
echnology				
000 Series Technology	•	•		
000 Series Technology	•	•	•	
000 Series Technology	•	•	•	•
wards				
Voolmark	Blue	Blue		
Quiet Mark				•
Programmes	••••••			
	•	•	•	•
Cottons	•	•	•	•
Cotton Eco				
ynthetics	•	•	•	•
efresh				
Pelicates				•
/ool	•	•	•	
/ool Refresh				
1ixed	•	•	•	•
ilk	•	•	•	•••••••••••••••••••••••••••••••••••••••
ledlinen	•		•••••••••••••••••••••••••••••••••••••••	•
	•	•	•	•
asy Iron	•	•	•	•
Dutdoor	•	•	•	
Duvet	•	•	•	•
ports	•	•	•	•
active Wear				
eans	•			•
reshen Up				
Time 30	•••••			
	•			
Cottons – Extra Dry				
Cottons – Strong Dry				
Cottons – Cupboard Dry				
Cottons – Iron Dry				
ynthetics – Extra Dry				
Synthetics – Cupboard Dry				-
Synthetics – Iron Dry	•			
Options				
•	•		•	•
Delay Start	•	•	•	•
Delicate			·	•
Drying Mode	•	•		
Anti-crease	•	•	•	•
)ryness Level	•	•	•	٠
ime Drying	•	•	•	•
tart/Pause	•	•	•	•
hild Lock	•	•	•	•
Quiet	-	-	-	-
team Level	·····			
ensitive				
uzzer				
efresh	•		•	
nergy Performance				
nergy Efficiency Class	A++	A++	A+	В
nnual Energy Consumption (kWh)	235	235	309	560
Drying Noise (dB)	66	66	66	65
tand-by Power (W)	1.9	1.9	1.9	1.9
Dimensions				
leight (mm)	850	850	850	850
Vidth (mm)	600	600	600	600
Depth Max (mm)	665	665	665	665
Net Weight (kg)	48.26	48.26	48.46	38.46
Power Cord Length (mm)	1450	1450	1450	1450

Overview	7
Dry Capacity (kg)	/ Medium Display
Display Controls	Dial and Touch Buttons
Fascia Panel	
	White
Door Colour/Type	White Door
Technology	
8000 Series Technology	
7000 Series Technology	
6000 Series Technology	•
Awards	
Woolmark	
Quiet Mark	•
Programmes	
Cottons	•
Cotton Eco	•
Synthetics	•
Refresh	
Delicates	•
Wool	
Wool Refresh	
Mixed	•
Silk	
Bedlinen	•
Easy Iron	•
Outdoor	
Duvet	•
Sports	•
Active Wear	
Jeans	•
Freshen Up	
Time 30	•••••
Cottons – Extra Dry	
Cottons – Strong Dry	
Cottons – Cupboard Dry	
Cottons – Iron Dry	
Synthetics – Extra Dry	
Synthetics – Cupboard Dry	••••••
Synthetics – Iron Dry	
Options	
Delay Start	•
Delicate	•
Drying Mode	
Anti-crease	•
Dryness Level	•
Time Drying	•
Start/Pause	•
Child Lock	•
Quiet	
Steam Level	
Sensitive	
Buzzer	
Refresh	
Energy Performance	
Energy Efficiency Class	В
Annual Energy Consumption (kWh)	504
Drying Noise (dB) Stand by Dower (W)	66
Stand-by Power (W)	1.9
Dimensions	
Height (mm)	850
Width (mm)	600
Depth Max (mm)	600
Net Weight (kg)	36.96
Power Cord Length (mm)	1450

T6DBG720N	T65170AV
7 Medium Display Dial and Touch Buttons White Solid White Door	7 No Display Dial and Buttons White Solid White Door
•	
•	
•	•
•	•
	•
•	•
•	•
•	•
B 504 66 19	C 510 66 19
850 600 600 36.96 1450	850 600 630 29.76 1600

WASHER DRYERS














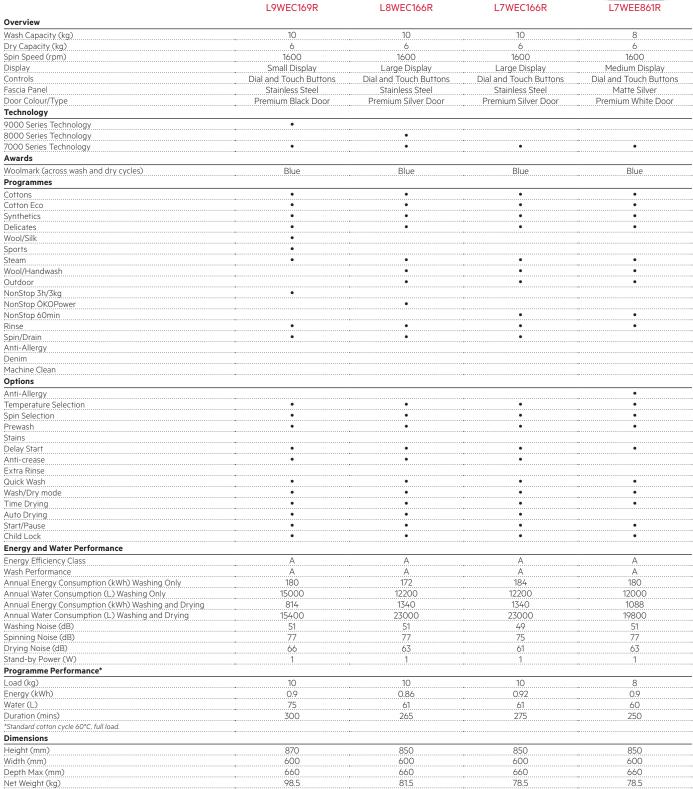

	L7WEG841R	
Overview		
Wash Capacity (kg)	8	
Dry Capacity (kg)	4	
Spin Speed (rpm)	1600	
Display	Small Display	
Controls	Dial and Touch Buttons	Dia
Fascia Panel	White	
Door Colour/Type	Premium White Door	Pr
Technology		
9000 Series Technology		
8000 Series Technology	-	
7000 Series Technology	•	
Awards		
Woolmark (across wash and dry cycles) -	Blue	
Programmes		
Cottons	•	
Cotton Eco	•	
Synthetics	•	
Delicates	•	
Wool/Silk		
Sports	-	
Steam Waal (Landwach		
Wool/Handwash Outdoor	•	
Outdoor Non Stop 3h/3kg	•	
Non Stop ÖKOPower		•••••
Non Stop 60min	•	•••••
Rinse	•	
Spin/Drain	•	
Anti-Allergy		
Denim		
Machine Clean		
Options		
Anti-Allergy		
Temperature Selection	•	
Spin Selection	•	
Prewash	•	
Stains		
Delay Start	•	
Anti-crease		
Extra Rinse		
Quick Wash	•	
Wash/Dry mode	•	
Time Drying	•	
Auto Drying		
Start/Pause	•	
Child Lock	•	
Energy and Water Performance		
Energy Efficiency Class	Α	
Wash Performance		
Annual Energy Consumption (kWh) Washing Only	180	
Annual Water Consumption (L) Washing Only	10800	
Annual Energy Consumption (kWh) Washing and Drying		
Annual Water Consumption (L) Washing and Drying		
Washing Noise (dB)	51	
Spinning Noise (dB)	76	
Drying Noise (dB)	60	
Stand-by Power (W)		
Programme Performance*		
Load (kg)	8	
Energy (kWh)	0.9	
Water (L)	52	
Duration (mins)	278	
*Standard cotton cycle 60°C, full load.		
Dimensions		
Height (mm)	850	
Width (mm)	600	
Depth Max (mm)	576	
Net Weight (kg)		
Power Cord Length (mm)	1800	
Length of Waste Pipe (mm)	1400	

Power Cord Length (mm)

Length of Waste Pipe (mm)



L7WBG741R	L7WE7631BI
7	7
1400	1600
Small Display ons Dial and Touch Buttons	Digit Display
ons Dial and Touch Buttons White	Silver
4 1400 Small Display ons Dial and Touch Buttons White por Premium White Door	White Door
•	•
Blue	
•	•
•	•
•	•
	•
•	•
•	•
•	•
•	•
	•
	•
	•
	•
•	•
	•
•	•
•	•
	•
•	•
•	•
•	•
•	•
•	•
٨	٨
A A	AA
118	A 160
10400	10400
938 18400	940 19000
51	46
76 59	70 52
1	1
7	7
0.59 52	0.80 52
262	265
850	819
600	596
576 66.5	544 71.50
1800	1500
1400	1400

INSTALLATION DIAGRAMS

AEG has always been committed to supporting its retail partners and professional installers by providing them with best in class installation solutions. AEG kitchens are simple to install and use only one Torx T20 screwdriver to install all of our appliances, allowing installers to save time. In 2018, AEG launched a first of its kind Installer App, giving professional installers access to installation information at their fingertips.

IN THIS SECTION

Refrigeration Integrated Fridge Freezers	286
Integrated Fridges and Freezers	287 288
Side by Side Fridge Freezers Wine Cooling	288
	200
Cooking	
Single Ovens	289
Double Ovens	290
Compact Ovens	290
Microwave Ovens	290
Bean to Cup Coffee Machine	291
Hobs	291
Hoods	298
Warming Drawers	302
Vac Sealers	302
Dishwashers	
Fully Integrated	303
Slimline Integrated	303
Semi-Integrated	303
Laundry	
Built-in	303

ONE TORX T20 SCREWDRIVER TO INSTALL ALL APPLIANCES

*The app is available for download on Apple and Android mobile phones.



Only one Torx T20 screwdriver to install **all** appliances




Not having to change tools saves time



Electrolux is the first more to be to design an **installation app*** Electrolux is the first manufacturer specifically for professional installers


INTEGRATED FRIDGE FREEZERS

SCE8186VTC, SCE8182VNC, SCE8182XNC




SCE8192VTS, SCE8191VTS

SCE8182VTS, SCE8181VTS, SCB6181XLS



SCE81925TS




SCE8182XTS, SCE8181VNS, SCB6181VLS

SCB5142VLS

min 545 min 560


َ min 545 min 560



200

INTEGRATED FRIDGES AND FREEZERS

ABE6821VNF, ABE6822VAF, ABB6821VAF, SFE5822VAF, SFB5821VAF, SKE5822VAF, SKB5821VAF



ABK8182VNC, SKK8182VDC




ABB8181VNC, ABE8122VNC, SKK8182VZC, SFE8182VDC, SKB8181VDC








ABB8121VNF, SKE8122VAC, SKB8121VAF








SIDE BY SIDE FRIDGE FREEZERS




WINE COOLING







RMB76311NX



SWE63001DG




SWE61501DG




COMPACT BLAST CHILLER





SINGLE OVENS

ALL MODELS




** Ovens with glass front

** Ovens with metal front


DOUBLE OVENS

ALL MODELS BUILT-IN




MICROWAVE OVENS

MBE2658DEM, MBE2658SEM




BEAN TO CUP COFFEE MACHINE

ALL MODELS



ALL MODELS BUILT UNDER



a=500 b=600 min.300 a=min.462 b=min.562 360 340 340

20

296


a=494

b=594

MBB1756DEM, MBB1756SEM, MBB1755SEM

COMPACT OVENS

ALL MODELS EXCLUDING COFFEE MACHINE




** Appliance with glass front


** Appliance with metal front

ELECTRIC HOBS

IAE84851FB, IAE84881FB



IKE85651FB




IPE84571FB, IPE84531FB

ELECTRIC HOBS


IKE74451FB


IKE84471FB, IKE85431FB, IAE84411FB, IKE84441FB, IKB84401FB


min. 1500 —




IAE64850FB, IKE64651FB, IKE64471FB, IKE64441FB, IAE64411FB, IKB64401FB, IPE64551FB












HK604200IB





HK955070FB






HK764070FB







ELECTRIC HOBS




GAS HOBS






HG795840NB, HG755820UM





HKB75540NB





590 60 0


HK614000CB
















GAS HOBS


HG694840NB





MIXED FUEL




COMBO HOBS

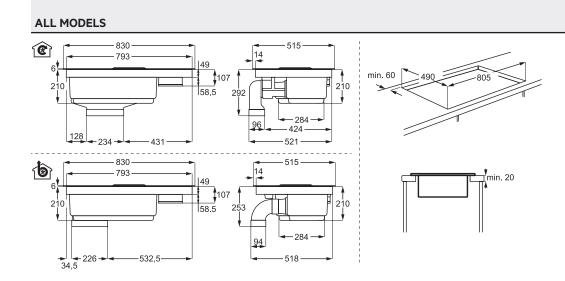












HG654550SY, HG654351SM, HG644351SM






DESIGNER HOODS

DLE0630B/W




DLE0431W/B/M




HOODS


DIK7190HG





DIE6180HM




DDE5980G








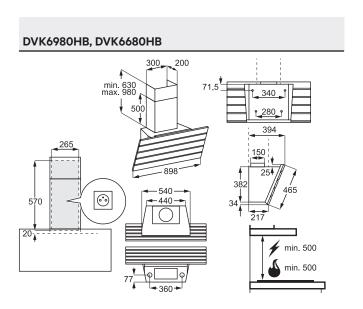


HOODS

DVB4850B, DVB4550B



DBE6980HM, DBE6780HM, DBE6680HM



DBB5960HM, DBB5760HM, DBB5660HM

150

290


108

🖌 min. 500


min. 650


310






DVB4850M, DVB4550M









DKB5960HM, DKB5660HM


DTB3652M




DPB3931S, DPB3631S








DEB2631S




WARMING DRAWERS

KDK912924M, KDE912924M (29CM)




VAC SEALERS

KDK911423M, KDE911423M




DISHWASHERS

FSK93807P, FSK84707P, FSK63807P, FSK63730P, FSK62607P FULLY INTEGRATED




FSK52917Z, FSK52617Z, FSB42607Z FULLY INTEGRATED




LAUNDRY


L7FE7261BI, L7WE7631BI

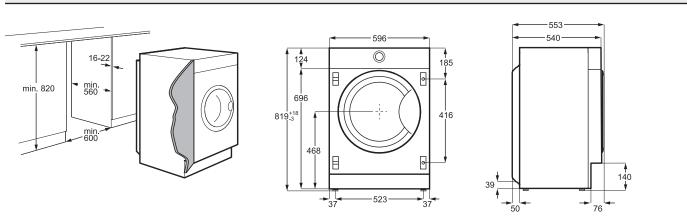



KDK911424M, KDE911424M, KDE911424B



KDE911423B BLACKLINE







WARRANTIES

AEG appliances come with a 12 month warranty from date of purchase. When you register your new appliance your warranty will be extended to two or five years (depending on model). During your warranty period you are protected against the cost of parts, call-out and labour charges. All work is carried out by our national network of approved AEG engineers.

You can register your appliance by completing the warranty registration card enclosed with your appliance, calling our dedicated warranty registration phone number printed on the card, or online at www.aeg.co.uk

For additional peace of mind you have the option to extend your guarantee even further with our AEG Protection Plan. You'll be protected against damage caused by accident from the moment you join and if one of our approved engineers can't fix it, you could receive a brand new replacement. This coverage is provided by our specialist insurers Domestic and General.

To find out more visit **www.aeg.co.uk** or call **0800 479 0775**





SUPPORT/

Customer Service

Should you need to contact us about your product we have a dedicated AEG customer service team to help. Our team is based in the AEG UK head office and can be contacted by phone on 03445 611 611 or via www.aeg.co.uk

Local service, nationwide

Our national network of Service Force agents provide product maintenance, genuine parts and repairs for all AEG Major Appliances. Genuine AEG parts ensure you continue to experience the excellent performance you expect from your AEG product.

If you require a visit from one of our agents for your Major Appliance please call our Service Force team on 03445 616 616.



AEG Major Appliances Addington Way Luton LU4 9QQ Telephone: 03445 611 611

AEG Major Appliances is a division of Electrolux plc. Registered in England, No. 2331516. Registered Office, Addington Way, Luton LU4 9QQ

AEG Major Appliances Electrolux Group Ireland Ltd Suite 7 & 8 Westland House, Westland Business Park. Nangor Road, Dublin 12 D12 TR98

Tel: 00353 (0)818 543000

Registered in Ireland No 9118. Registered Office: Nangor Road, Dublin 12 D12 TR98


Part number: 506008185007

Printed May 2019

AFTER SALES CUSTOMER CARE


ENERGY INFORMATION/ EU ENERGY EFFICIENCY INFORMATION

For refrigerators and freezers, as well as stating the energy efficiency class (A+++ – most efficient, 'D' – least efficient) the label also gives the annual electricity consumption (i.e. running cost) freezing capacity, noise level and the usable storage capacity.



Example of refrigeration energy label.


For electric ovens, as well as stating the energy efficiency ('A' – most efficient, 'G' – least efficient), the label also states the energy consumption (in kWh) and the usable volume of the oven. If the oven is a double oven it will carry this information for both ovens. For dishwashers, as well as stating the energy efficiency class (A+++ – most efficient, 'D' – least efficient) the label also states the annual water consumption (Its), drying efficiency, place settings and noise level.



Example of dishwasher energy label.

This scheme, which covers refrigerators, freezers, washing machines, tumble dryers, dishwashers and electric ovens is designed to offer consumers a standardised method of choosing the most energy efficient appliances.

For washing machines, as well as stating the energy efficiency class (A+++ – most efficient, 'D' – least efficient) the label also states the annual water consumption (Its), load size (kg), spin speed efficiency and the washing & spinning noise levels.



Example of washing machine energy label.



AEG has been creating pioneering appliances for the home for over 125 years. While others are catching up, we're moving further on, always an idea ahead. So if you want to know about true state-of-the-art technology, take a look inside.

To find out more visit **aeg.co.uk**